

Electronic Shelf Label Service (ESLS)

Bluetooth® Test Suite

- **Revision:** ESLS.TS.p4
- **Revision Date:** 2026-02-17
- **Prepared By:** Electronic Shelf Label Working Group
- **Published during TCRL:** TCRL.pkg102



This document, regardless of its title or content, is not a Bluetooth Specification as defined in the Bluetooth Patent/Copyright License Agreement (“PCLA”) and Bluetooth Trademark License Agreement. Use of this document by members of Bluetooth SIG is governed by the membership and other related agreements between Bluetooth SIG Inc. (“Bluetooth SIG”) and its members, including the PCLA and other agreements posted on Bluetooth SIG’s website located at www.bluetooth.com.

THIS DOCUMENT IS PROVIDED “AS IS” AND BLUETOOTH SIG, ITS MEMBERS, AND THEIR AFFILIATES MAKE NO REPRESENTATIONS OR WARRANTIES AND DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, TITLE, NON-INFRINGEMENT, FITNESS FOR ANY PARTICULAR PURPOSE, THAT THE CONTENT OF THIS DOCUMENT IS FREE OF ERRORS.

TO THE EXTENT NOT PROHIBITED BY LAW, BLUETOOTH SIG, ITS MEMBERS, AND THEIR AFFILIATES DISCLAIM ALL LIABILITY ARISING OUT OF OR RELATING TO USE OF THIS DOCUMENT AND ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING LOST REVENUE, PROFITS, DATA OR PROGRAMS, OR BUSINESS INTERRUPTION, OR FOR SPECIAL, INDIRECT, CONSEQUENTIAL, INCIDENTAL OR PUNITIVE DAMAGES, HOWEVER CAUSED AND REGARDLESS OF THE THEORY OF LIABILITY, AND EVEN IF BLUETOOTH SIG, ITS MEMBERS, OR THEIR AFFILIATES HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

This document is proprietary to Bluetooth SIG. This document may contain or cover subject matter that is intellectual property of Bluetooth SIG and its members. The furnishing of this document does not grant any license to any intellectual property of Bluetooth SIG or its members.

This document is subject to change without notice.

Copyright © 2020–2026 by Bluetooth SIG, Inc. The Bluetooth word mark and logos are owned by Bluetooth SIG, Inc. Other third-party brands and names are the property of their respective owners.



Contents

1	Scope	6
2	References, definitions, and abbreviations	7
2.1	References	7
2.2	Definitions	7
2.3	Acronyms and abbreviations	7
3	Test Suite Structure (TSS)	8
3.1	Overview	8
3.2	Test Strategy	8
3.3	Test groups	8
4	Test cases (TC)	9
4.1	Introduction	9
4.1.1	Test case identification conventions	9
4.1.2	Conformance	9
4.1.3	Pass/Fail verdict conventions	10
4.2	Setup preambles	10
4.2.1	ATT Bearer on LE Transport	10
4.2.2	EATT Bearer on LE Transport	10
4.2.3	ESL Control Point preamble	10
4.2.4	Configured state	11
4.2.5	Synchronized state	11
4.2.6	Updating state	11
4.3	Generic GATT Integrated Tests	13
	ESLS/SR/SGGIT/SER/BV-01-C [Service GGIT – Electronic Shelf Label]	13
	ESLS/SR/SGGIT/CHA/BV-01-C [Characteristic GGIT – ESL Address]	13
	ESLS/SR/SGGIT/CHA/BV-02-C [Characteristic GGIT – AP Sync Key Material]	13
	ESLS/SR/SGGIT/CHA/BV-03-C [Characteristic GGIT – ESL Response Key Material]	13
	ESLS/SR/SGGIT/CHA/BV-04-C [Characteristic GGIT – ESL Current Absolute Time]	13
	ESLS/SR/SGGIT/CHA/BV-05-C [Characteristic GGIT – ESL Display Information]	13
	ESLS/SR/SGGIT/CHA/BV-06-C [Characteristic GGIT – ESL Image Information]	13
	ESLS/SR/SGGIT/CHA/BV-07-C [Characteristic GGIT – ESL Sensor Information]	13
	ESLS/SR/SGGIT/CHA/BV-08-C [Characteristic GGIT – ESL LED Information]	13
	ESLS/SR/SGGIT/CHA/BV-09-C [Characteristic GGIT – ESL Control Point]	13
4.4	GATT Characteristics	14
	ESLS/SR/CHA/BV-01-C [Current Absolute Time]	14
4.4.1	Characteristics Validation	14
	ESLS/SR/CHA/BV-02-C [ESL Display Information Characteristic]	14
	ESLS/SR/CHA/BV-03-C [ESL Sensor Information Characteristic]	15
	ESLS/SR/CHA/BV-04-C [ESL LED Information Characteristic Length]	15
	ESLS/SR/CHA/BI-01-C [Invalid ESL Address]	16
4.4.2	Information characteristic	16
	ESLS/SR/CHA/BV-05-C [Information Characteristic, One Display]	17
	ESLS/SR/CHA/BV-06-C [Information Characteristic, One Sensor]	17
	ESLS/SR/CHA/BV-07-C [Information Characteristic, One LED]	17
4.5	ESL Control Point procedures	17
4.5.1	Lower Tester Control Point Command	17
	ESLS/SR/ECP/BV-01-C [Ping]	17
	ESLS/SR/ECP/BV-02-C [RGB LED Control, Color]	18
	ESLS/SR/ECP/BV-03-C [Monochrome LED Control, Ignore RGB Fields]	19



4.5.2	LED Control, Repeat, and Flashing Pattern	20
	ESLS/SR/ECP/BV-04-C [LED Control, Repeat, and Flashing Pattern – Monochrome LED]	20
	ESLS/SR/ECP/BV-05-C [LED Control, Repeat, and Flashing Pattern – Any LED]	20
	ESLS/SR/ECP/BV-06-C [LED Timed Control]	21
	ESLS/SR/ECP/BV-07-C [Display Image]	23
	ESLS/SR/ECP/BV-08-C [Display Timed Image]	24
	ESLS/SR/ECP/BV-09-C [Unassociate from AP]	25
	ESLS/SR/ECP/BV-10-C [Read Sensor Data]	25
	ESLS/SR/ECP/BV-11-C [Refresh Display]	26
	ESLS/SR/ECP/BV-12-C [Factory Reset]	27
	ESLS/SR/ECP/BV-13-C [Service Reset]	28
4.5.3	Timed Control Point Commands, Replace Queued Command	29
	ESLS/SR/ECP/BV-14-C [Timed Control Point Commands, Replace Queued Command, LED Timed Control]	29
	ESLS/SR/ECP/BV-15-C [Timed Control Point Commands, Replace Queued Command, Display Timed Image]	29
4.5.4	Control Point Error Response	30
	ESLS/SR/ECP/BI-01-C [Control Point Error Response, LED Control]	30
	ESLS/SR/ECP/BI-02-C [Control Point Error Response, LED Timed Control]	30
	ESLS/SR/ECP/BI-03-C [Control Point Error Response, Display Image]	30
	ESLS/SR/ECP/BI-04-C [Control Point Error Response, Display Time Image]	30
	ESLS/SR/ECP/BI-05-C [Control Point Error Response, Read Sensor Data]	30
	ESLS/SR/ECP/BI-06-C [Control Point Error Response, Refresh Display]	30
	ESLS/SR/ECP/BI-07-C [Control Point Error Response, Vendor-specific Tag]	30
4.5.5	Control Point, Invalid Index	30
	ESLS/SR/ECP/BI-08-C [Control Point Invalid Index, Sensor Data]	31
	ESLS/SR/ECP/BI-09-C [Control Point Invalid Index, Refresh Display]	31
	ESLS/SR/ECP/BI-10-C [Control Point Error Response, LED Control]	31
	ESLS/SR/ECP/BI-11-C [Control Point Error Response, LED Timed Control]	31
4.5.6	Control Point, Invalid Index, Display Commands	31
	ESLS/SR/ECP/BI-12-C [Control Point Invalid Index, Display Image]	32
	ESLS/SR/ECP/BI-13-C [Control Point Error Response, Display Time Image]	32
	ESLS/SR/ECP/BI-14-C [Reject Command with Invalid ESL ID]	32
	ESLS/SR/ECP/BV-16-C [LED Control, Replace Active Command]	33
	ESLS/SR/ECP/BV-17-C [LED Timed Control, Replace Active Command]	34
4.5.7	Timed Control Point Commands, Invalid Absolute Time Parameter	35
	ESLS/SR/ECP/BI-15-C [Timed Control Point Commands, Invalid Absolute Time Parameter, LED Timed Control]	35
	ESLS/SR/ECP/BI-16-C [Timed Control Point Commands, Invalid Absolute Time Parameter, Display Timed Image]	35
4.5.8	Timed Control Point Commands, Absolute Time set to 0	36
	ESLS/SR/ECP/BV-18-C [Timed Control Point Commands, Absolute Time set to 0, LED Timed Control]	36
	ESLS/SR/ECP/BV-19-C [Timed Control Point Commands, Absolute Time set to 0, Display Timed Image]	36
	ESLS/SR/ECP/BV-20-C [Update Complete]	37
4.5.9	Timed Control Point Command Per Element	38
	ESLS/SR/ECP/BV-21-C [Timed Control Point Command Per Element, LED]	38
	ESLS/SR/ECP/BV-22-C [Timed Control Point Command Per Element, Display]	38
4.6	Updating state	39
	ESLS/SR/UPD/BV-01-C [Ignore Periodic Advertising with Responses data]	39
4.7	State change	40
	ESLS/SR/SC/BV-01-C [State Change, Link Loss, Configuring to Unassociated]	40
	ESLS/SR/SC/BV-02-C [State Change, Link Loss, Configured to Unsynchronized]	40
	ESLS/SR/SC/BV-03-C [State Change, Link Loss, Updating to Unsynchronized]	41



5	Test case mapping	43
6	Revision history and acknowledgments	46



1 Scope

This Bluetooth document contains the Test Suite Structure (TSS) and test cases to test the implementation of the Bluetooth Electronic Shelf Label Service with the objective to provide a high probability of air interface interoperability between the tested implementation and other manufacturers' Bluetooth devices.

2 References, definitions, and abbreviations

2.1 References

This document incorporates provisions from other publications by dated or undated reference. These references are cited at the appropriate places in the text, and the publications are listed hereinafter. Additional definitions and abbreviations can be found in [1], [2], and [3].

- [1] Bluetooth Core Specification, Version 5.4 or later
- [2] Test Strategy and Terminology Overview
- [3] Electronic Shelf Label Service Specification, Version 1.0
- [4] ICS Proforma for Electronic Shelf Label Service, ESLS.ICS
- [5] Characteristic and Descriptor descriptions are accessible via the [Bluetooth SIG Assigned Numbers](#)
- [6] GATT Test Suite, GATT.TS
- [7] IXIT Proforma for Electronic Shelf Label Service

2.2 Definitions

In this Bluetooth document, the definitions from [1], [2], and [3] apply.

2.3 Acronyms and abbreviations

In this Bluetooth document, the definitions, acronyms, and abbreviations from [1], [2], and [3] apply.



3 Test Suite Structure (TSS)

3.1 Overview

The Electronic Shelf Label Service requires the presence of GAP, SM, ATT, L2CAP, and GATT. This is illustrated in [Figure 3.1](#).

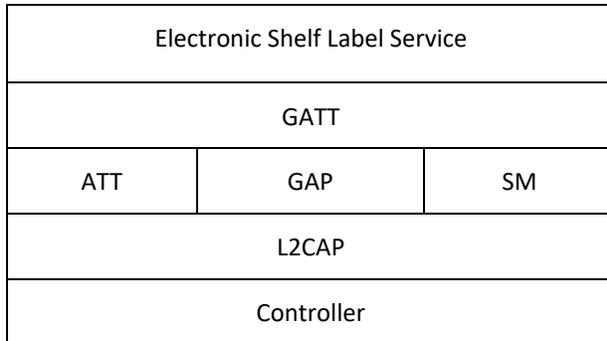


Figure 3.1: Electronic Shelf Label Service test model

3.2 Test Strategy

The test objectives are to verify functionality of the Electronic Shelf Label Service within a Bluetooth Host and enable interoperability between Bluetooth Hosts on different devices. The testing approach covers mandatory and optional requirements in the specification and matches these to the support of the IUT as described in the ICS. Any defined test herein is applicable to the IUT if the ICS logical expression defined in the Test Case Mapping Table (TCMT) evaluates to true.

The test equipment provides an implementation of the Radio Controller and the parts of the Host needed to perform the test cases defined in this Test Suite. A Lower Tester acts as the IUT's peer device and interacts with the IUT over-the-air interface. The configuration, including the IUT, needs to implement similar capabilities to communicate with the test equipment. For some test cases, it is necessary to stimulate the IUT from an Upper Tester. In practice, this could be implemented as a special test interface, a Man Machine Interface (MMI), or another interface supported by the IUT.

The Test Suite contains Valid Behavior (BV) tests complemented with Invalid Behavior (BI) tests where required. The test coverage mirrored in the Test Suite Structure is the result of a process that started with catalogued specification requirements that were logically grouped and assessed for testability enabling coverage in defined test purposes. The tests also include coverage for optional displays, sensors, and LEDs.

3.3 Test groups

The following test groups have been defined:

- Generic GATT Integrated Tests
- Characteristics Length Validation
- ESL Control Point procedures

4 Test cases (TC)

4.1 Introduction

4.1.1 Test case identification conventions

Test cases are assigned unique identifiers per the conventions in [2]. The convention used here is: **<spec abbreviation>/<IUT role>/<class>/<feat>/<func>/<subfunc>/<cap>/<xx>-<nn>-<y>**.

Additionally, testing of this specification includes tests from the GATT Test Suite [6] referred to as Generic GATT Integrated Tests (GGIT); when used, the test cases in GGIT are referred to through a TCID string using the following convention:

<spec abbreviation>/<IUT role>/<GGIT test group>/< GGIT class >/<xx>-<nn>-<y>.

Identifier Abbreviation	Spec Identifier <spec abbreviation>
ESLS	Electronic Shelf Label Service
Identifier Abbreviation	Role Identifier <IUT role>
SR	Server
Identifier Abbreviation	Reference Identifier <GGIT test group>
SGGIT	Server Generic GATT Integrated Tests
Identifier Abbreviation	Reference Identifier <GGIT class>
CHA	Characteristic
SER	Service
Identifier Abbreviation	Feature Identifier <feat>
ECP	ESL Control Point procedures
SC	State Change
UPD	Updating state

Table 4.1: ESLS TC feature naming conventions

4.1.2 Conformance

When conformance is claimed for a particular specification, all capabilities are to be supported in the specified manner. The mandated tests from this Test Suite depend on the capabilities to which conformance is claimed.

The Bluetooth Qualification Program may employ tests to verify implementation robustness. The level of implementation robustness that is verified varies from one specification to another and may be revised for cause based on interoperability issues found in the market.

Such tests may verify:

- That claimed capabilities may be used in any order and any number of repetitions not excluded by the specification
- That capabilities enabled by the implementations are sustained over durations expected by the use case
- That the implementation gracefully handles any quantity of data expected by the use case

- That in cases where more than one valid interpretation of the specification exists, the implementation complies with at least one interpretation and gracefully handles other interpretations
- That the implementation is immune to attempted security exploits

A single execution of each of the required tests is required to constitute a Pass verdict. However, it is noted that to provide a foundation for interoperability, it is necessary that a qualified implementation consistently and repeatedly pass any of the applicable tests.

In any case, where a member finds an issue with the test plan generated by the Bluetooth SIG qualification tool, with the test case as described in the Test Suite, or with the test system utilized, the member is required to notify the responsible party via an erratum request such that the issue may be addressed.

4.1.3 Pass/Fail verdict conventions

Each test case has an Expected Outcome section. The IUT is granted the Pass verdict when all the detailed pass criteria conditions within the Expected Outcome section are met.

The convention in this Test Suite is that, unless there is a specific set of fail conditions outlined in the test case, the IUT fails the test case as soon as one of the pass criteria conditions cannot be met. If this occurs, then the outcome of the test is a Fail verdict.

4.2 Setup preambles

4.2.1 ATT Bearer on LE Transport

1. Establish an LE transport connection between the IUT and the Lower Tester.
2. Establish an L2CAP channel 0x0004 between the IUT and the Lower Tester over that LE transport.

4.2.2 EATT Bearer on LE Transport

1. Establish an LE transport connection between the IUT and the Lower Tester.
2. Establish an L2CAP channel 0x0005 for signaling and one L2CAP channel (for ATT bearers) with EATT PSM (as defined in Assigned Numbers) between the IUT and the Lower Tester over that LE transport.

4.2.3 ESL Control Point preamble

1. Establish a Bearer connection between the Lower Tester and the IUT as described in Section 4.2.1, if using ATT over an LE transport, or Section 4.2.2 if using EATT over an LE transport.
2. The Lower Tester executes the GATT Write Characteristic Value sub-procedure to the IUT for the ESL Address characteristic with an ESL Address.
3. The Lower Tester executes the GATT Write Characteristic Value sub-procedure to the IUT for the AP Synchronization Key characteristic with an AP Synchronization Key.
4. The Lower Tester executes the GATT Write Characteristic Value sub-procedure to the IUT for the ESL Response Key characteristic with an ESL Response Key.
5. The Lower Tester executes the GATT Write Characteristic Value sub-procedure to the IUT for the ESL Current Absolute Time Characteristic with a current time.
6. The handle of the ESL Control Point characteristic has been previously discovered by the Lower Tester during a test procedure in Section 4.3 or is known to the Lower Tester by other means.
7. The handle of the Client Configuration Descriptor of the ESL Control Point characteristic has been previously discovered by the Lower Tester during a test procedure in Section 4.3 or is known to the Lower Tester by other means.
8. The Lower Tester performs a Bonding procedure.
9. The Lower Tester enables notifications by writing the value 0x0001 using the GATT Write Characteristic Descriptor sub-procedure for the ESL Control Point CCCD.



4.2.4 Configured state

- Preamble Purpose

The IUT is unassociated and is not configured. The Lower Tester initiates a connection with the IUT and configures the IUT by writing the ESL Address, the AP Synchronization Key, the ESL Response Key, and the ESL Current Absolute Time characteristics.

- Reference

[3] 2.7.3.2

- Initial Condition

- The IUT is Unassociated.

- Preamble Procedure

1. The IUT enters the GAP Undirected Connectable mode and transmits advertising packets containing the ESL Service UUID.
2. Establish a Bearer connection between the Lower Tester and the IUT as described in Section 4.2.1, if using ATT over an LE transport, or Section 4.2.2 if using EATT over an LE transport.
3. The Lower Tester executes the GATT Write Characteristic Value sub-procedure to the IUT for the ESL Address characteristic with an ESL Address.
4. The Lower Tester executes the GATT Write Characteristic Value sub-procedure to the IUT for the AP Synchronization Key characteristic with an AP Synchronization Key.
5. The Lower Tester executes the GATT Write Characteristic Value sub-procedure to the IUT for the ESL Response Key characteristic with an ESL Response Key.
6. The Lower Tester executes the GATT Write Characteristic Value sub-procedure to the IUT for the ESL Current Absolute Time Characteristic with a current time.

4.2.5 Synchronized state

- Preamble Purpose

The IUT is in the Configured state. The IUT syncs with the Lower Tester using Periodic Advertising with Responses.

- Reference

[3] 2.7.3.3

- Initial Condition

- The IUT is Configured using the Preamble in Section 4.2.4.

- Preamble Procedure

1. The Lower Tester initiates a connection with the IUT.
2. The IUT synchronizes with the Lower Tester using the Periodic Advertising Sync Transfer procedure.

4.2.6 Updating state

- Preamble Purpose

The IUT is configured and put in the updating state by the Lower Tester access point. The Lower Tester sets the ESL Address, the AP Sync Key, and the ESL Response Key.

- Reference

[3] 2.7.3.4



- Initial Condition
 - The IUT has an active ATT or EATT Bearer connection with the Lower Tester.
 - The IUT is bonded only with the Lower Tester.
- Preamble Procedure
 1. The Lower Tester executes the GATT Write Characteristic Value sub-procedure to the IUT for the ESL Address characteristic with an ESL Address.
 2. The Lower Tester executes the GATT Write Characteristic Value sub-procedure to the IUT for the AP Synchronization Key characteristic with an AP Synchronization Key.
 3. The Lower Tester executes the GATT Write Characteristic Value sub-procedure to the IUT for the ESL Response Key characteristic with an ESL Response Key.
 4. The Lower Tester executes the GATT Write Characteristic Value sub-procedure to the IUT for the ESL Current Absolute Time Characteristic with a current time.
 5. The Lower Tester disconnects the active connection.
 6. The Lower Tester initiates a connection with the IUT.

4.3 Generic GATT Integrated Tests

Execute the Generic GATT Integrated Tests defined in Section 6.3, Server test procedures (SGGIT), in [6] using Table 4.2 below as input:

TCID	Service / Characteristic / Descriptor	Reference	Properties	Value Length (Octets)	Type
ESLS/SR/SGGIT/SER/BV-01-C [Service GGIT – Electronic Shelf Label]	Electronic Shelf Label	[3] 2.6	-	-	Primary Service
ESLS/SR/SGGIT/CHA/BV-01-C [Characteristic GGIT – ESL Address]	ESL Address Characteristic	[3] 3.1	Mandatory: 0x08 (Write)	2	-
ESLS/SR/SGGIT/CHA/BV-02-C [Characteristic GGIT – AP Sync Key Material]	AP Sync Key Characteristic	[3] 3.2	Mandatory: 0x08 (Write)	24	-
ESLS/SR/SGGIT/CHA/BV-03-C [Characteristic GGIT – ESL Response Key Material]	ESL Response Key	[3] 3.3	Mandatory: 0x08 (Write)	24	-
ESLS/SR/SGGIT/CHA/BV-04-C [Characteristic GGIT – ESL Current Absolute Time]	ESL Current Absolute Time Characteristic	[3] 3.4	Mandatory: 0x08 (Write)	4	-
ESLS/SR/SGGIT/CHA/BV-05-C [Characteristic GGIT – ESL Display Information]	ESL Display Information Characteristic	[3] 3.5	Mandatory: 0x02 (Read)	Skip	-
ESLS/SR/SGGIT/CHA/BV-06-C [Characteristic GGIT – ESL Image Information]	ESL Image Information Characteristic	[3] 3.6	Mandatory: 0x02 (Read)	1	-
ESLS/SR/SGGIT/CHA/BV-07-C [Characteristic GGIT – ESL Sensor Information]	ESL Sensor Information Characteristic	[3] 3.7	Mandatory: 0x02 (Read)	Skip	-
ESLS/SR/SGGIT/CHA/BV-08-C [Characteristic GGIT – ESL LED Information]	ESL LED Information Characteristic	[3] 3.8	Mandatory: 0x02 (Read)	Skip	-
ESLS/SR/SGGIT/CHA/BV-09-C [Characteristic GGIT – ESL Control Point]	ESL Control Point Characteristic	[3] 3.9	Mandatory: 0x1C (Write Without Response, Write, Notify)	Skip	-

Table 4.2: Generic GATT Integrated test configuration



4.4 GATT Characteristics

ESLS/SR/CHA/BV-01-C [Current Absolute Time]

- Test Purpose

Verify that the Server IUT sets the system time.
- Reference

[3] 3.4
- Initial Condition
 - Establish a Bearer connection between the Lower Tester and the IUT as described in Section 4.2.1, if using ATT over an LE transport, or Section 4.2.2 if using EATT over an LE transport.
- Test Procedure
 1. The Lower Tester executes the GATT Write Characteristic Value sub-procedure for the ESL Current Absolute Time characteristic with a value of 123456.
 2. 5 s after Step 1, the Upper Tester verifies that the IUT current system time is larger than 123456.
 3. The Lower Tester executes the GATT Write Characteristic Value sub-procedure for the ESL Current Absolute Time characteristic with a value of 1357.
 4. 5 s after Step 3, the Upper Tester verifies that the IUT current system time is between 6357 and 123456.
- Expected Outcome

Pass verdict

In Step 2, the IUT current system time is between 128456 and 131456.

In Step 4, the IUT current system time is between 6357 and 123456.

4.4.1 Characteristics Validation

ESLS/SR/CHA/BV-02-C [ESL Display Information Characteristic]

- Test Purpose

Verify that the Server IUT responds to the Lower Tester ESL Display Information Read characteristic with the correct number of Display Data Structures with each Display correctly populated.
- Reference

[3] 3.5
- Initial Condition
 - Establish a Bearer connection between the Lower Tester and the IUT as described in Section 4.2.1, if using ATT over an LE transport, or Section 4.2.2 if using EATT over an LE transport.
 - The number of displays is defined by the TSPX_num_displays IXIT value.
 - The list of the width of each display is defined by the TSPX_display_width_array IXIT value.
 - The list of the height of each display is defined by the TSPX_display_height_array IXIT value.
 - The list of the type of each display is defined by the TSPX_display_type_array IXIT value.



- Test Procedure
 1. The Lower Tester executes the GATT Characteristic Value Read procedure for the ESL Display Information characteristic.

- Expected Outcome

Pass verdict

Each Display Data Structure has valid Width, Height, and Display_Type values set to the values declared in the relative element of TSPX_display_width_array, TSPX_display_height_array, and TSPX_display_type_array.

ESLS/SR/CHA/BV-03-C [ESL Sensor Information Characteristic]

- Test Purpose

Verify that the Server IUT responds to the Lower Tester ESL Sensor Information Read characteristic with the correct number of Sensor Data Structures with each Sensor Data correctly populated.

- Reference

[3] 3.7

- Initial Condition

- Establish a Bearer connection between the Lower Tester and the IUT as described in Section 4.2.1, if using ATT over an LE transport, or Section 4.2.2 if using EATT over an LE transport.
- The sensor type size array is defined by the TSPX_sensor_size_array IXIT value.
- The sensor type array is defined by the TSPX_sensor_type_array IXIT value.

- Test Procedure

1. The Lower Tester executes the GATT Characteristic Value Read procedure for the ESL Sensor Information characteristic.

- Expected Outcome

Pass verdict

Each Sensor Data Structure has Size and Sensor_Type values set to the values declared in the relative element of TSPX_sensor_size_array and TSPX_sensor_type_array. When the Sensor_Size is 0x00, the Sensor_Type is 2 octets. When the Sensor_Size is 0x01, the Sensor_Type is 4 octets.

ESLS/SR/CHA/BV-04-C [ESL LED Information Characteristic Length]

- Test Purpose

Verify that the Server IUT responds to the Lower Tester ESL LED Information Read characteristic with the proper parameters for each LED.

- Reference

[3] 3.8



- Initial Condition
 - Establish a Bearer connection between the Lower Tester and the IUT as described in Section 4.2.1, if using ATT over an LE transport, or Section 4.2.2 if using EATT over an LE transport.
 - The number of LEDs is defined by the TSPX_num_leds IXIT value.
- Test Procedure
 1. The Lower Tester executes the GATT Characteristic Value Read procedure for the ESL LED Information characteristic.
- Expected Outcome

Pass verdict

The length of the ESL LED Information characteristic, in octets, equals TSPX_num_leds.

ESLS/SR/CHA/BI-01-C [Invalid ESL Address]

- Test Purpose

Verify that the Server IUT rejects invalid ESL Addresses.
- Reference

[3] 3.1
- Initial Condition
 - Establish a Bearer connection between the Lower Tester and the IUT as described in Section 4.2.1, if using ATT over an LE transport, or Section 4.2.2 if using EATT over an LE transport.
- Test Procedure
 1. The Lower Tester executes the GATT Characteristic Value Write procedure for the ESL Address characteristic with bits 0 to 7 set to 0b1 and bits 8 to 14 set to a random bit.
 2. The IUT sends an ATT_ERROR_RSP to the Lower Tester with error code set to Value Not Allowed (0x13).
- Expected Outcome

Pass verdict

In Step 2, the IUT sends an ATT_ERROR_RSP PDU to the Lower Tester with the Value Not Allowed error.

4.4.2 Information characteristic

- Test Purpose

Verify that the Server IUT with one device returns only one element.
- Initial Condition
 - Establish a Bearer connection between the Lower Tester and the IUT as described in Section 4.2.1, if using ATT over an LE transport, or Section 4.2.2 if using EATT over an LE transport.



- Test Case Configuration

TCID	Reference	Element Characteristic
ESLS/SR/CHA/BV-05-C [Information Characteristic, One Display]	[3] 3.5.2	ESL Display Information
ESLS/SR/CHA/BV-06-C [Information Characteristic, One Sensor]	[3] 3.7.2	ESL Sensor Information
ESLS/SR/CHA/BV-07-C [Information Characteristic, One LED]	[3] 3.8.2	ESL LED Information

Table 4.3: Information Characteristic Index = 0 test cases

- Test Procedure

1. The Lower Tester executes the GATT Characteristic Value Read procedure for the element characteristic specified in [Table 4.3](#).
2. The IUT returns one element.

- Expected Outcome

Pass verdict

In Step 2, the IUT returns one element.

4.5 ESL Control Point procedures

4.5.1 Lower Tester Control Point Command

ESLS/SR/ECP/BV-01-C [Ping]

- Test Purpose

Verify that the Server IUT responds with a Basic State ESL notification when the Lower Tester sends the Ping opcode.

- Reference

[3] 3.9.2.1

- Initial Condition

- Enable the IUT for use with the ESL Control Point by performing the preamble described in [Section 4.2.3](#) with bit 15 (RFU) set to 0b1 for the ESL Address characteristic.

- Test Procedure

1. The Lower Tester executes the GATT Write Without Response sub-procedure for the ESL Control Point with the Ping opcode (0x00) and ESL_ID set.
2. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Basic State response.
3. Repeat Steps 1–2 with the Lower Tester executing the GATT Write Characteristic Value sub-procedure in Step 1.



- Expected Outcome

Pass verdict

After Step 1, the IUT sends a notification of the ESL Control Point with the Basic State opcode 0x10 to the Lower Tester with valid parameter values.

ESLS/SR/ECP/BV-02-C [RGB LED Control, Color]

- Test Purpose

Verify that the Server IUT with an RGB LED responds to setting the LED Control opcode, sets the indexed LED to the requested state, and updates all required characteristics and data values in the ESL LED Information characteristic.

- Reference

[3] 3.9.2.10

- Initial Condition

- The index of an RGB LED is defined by the TSPX_rgb_led_index IXIT value.
- Enable the IUT for use with the ESL Control Point by performing the preamble described in Section 4.2.3.

- Procedure

Execute the test procedure for each round specified in Table 4.4.

- The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the LED Control opcode (0xB0) and:
 - ESL_ID set to the value in the initial condition
 - LED_Index set to the value in Table 4.4
 - Color_Red, Color_Green, and Color_Blue set to the values in Table 4.4
 - Brightness set to 0b11
 - Flashing_Pattern set to 0x00000000
 - Repeat_Type set to 0b1
 - Repeats_Duration set to 0x0
- The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the LED State opcode with the LED_Index set to the value from Step 1.
- The Upper Tester verifies that the IUT changes the LED with the LED_Index from Step 1 to the colors from Step 1.

Round	Red	Green	Blue	LED_Index
1	0b00	0b00	0b00	0
2	0b01	0b00	0b00	TSPX_rgb_led_index
3	0b10	0b00	0b00	TSPX_rgb_led_index
4	0b11	0b00	0b00	TSPX_rgb_led_index
5	0b00	0b11	0b00	0
6	0b00	0b00	0b11	TSPX_rgb_led_index
7	0b11	0b11	0b00	TSPX_rgb_led_index
8	0b11	0b00	0b11	TSPX_rgb_led_index
9	0b00	0b11	0b11	0

Round	Red	Green	Blue	LED_Index
10	0b11	0b11	0b11	TSPX_rgb_led_index

Table 4.4: RGB LED Control, Color rounds

- Expected Outcome

Pass verdict

After Step 1, the IUT sends a notification of the ESL Control Point with the LED State response to the Lower Tester with valid parameter values.

In Step 3, the IUT sets the LED to the color specified in [Table 4.4](#) and is not flashing.

ESLS/SR/ECP/BV-03-C [Monochrome LED Control, Ignore RGB Fields]

- Test Purpose

Verify that the Server IUT with a monochrome LED ignores the RGB fields.

- Reference

[3] 3.9.2.10

- Initial Condition

- The index of a monochrome LED is defined by the TSPX_monochrome_led_index IXIT value.
- Enable the IUT for use with the ESL Control Point by performing the preamble described in [Section 4.2.3](#).

- Test Procedure

Execute the test procedure for each round specified in [Table 4.5](#).

- The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the LED Control (0xB0) opcode, parameters as specified in [Table 4.5](#), and:
 - ESL_ID set to the value in the initial condition
 - LED_Index set to TSPX_monochrome_led_index
- The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the LED State opcode with the LED_Index set to the value from Step 1.
- The Upper Tester verifies that the IUT's monochrome LED is as specified in [Table 4.5](#).

Round	Red	Green	Blue	Brightness	Flashing Pattern	Repeat Type	Repeats Duration	Verify
1	0b00	0b00	0b00	0b11	0x00000000	0b1	0x0	LED is on
2	0b11	0b11	0b11	0b11	0xFFFFFFFF	0b1	0x0	LED is on
3	0b10	0b10	0b10	0b11	0xFFFFFFFF	0b0	0x0	LED is off

Table 4.5: Monochrome LED Control, Ignore RGB Fields rounds

- Expected Outcome

Pass verdict

In Step 3, the IUT's monochrome LED is set as specified in [Table 4.5](#).



4.5.2 LED Control, Repeat, and Flashing Pattern

- Test Purpose

Verify that the Server IUT properly handles the Repeat_Type and Repeats_Duration parameters.
- Reference

[3] 3.9.2.10
- Initial Condition
 - The index of a monochrome LED is defined by the TSPX_monochrome_led_index IXIT value.
 - Enable the IUT for use with the ESL Control Point by performing the preamble described in Section 4.2.3.

- Test Case Configuration

TCID	LED_Index
ESLS/SR/ECP/BV-04-C [LED Control, Repeat, and Flashing Pattern – Monochrome LED]	TSPX_monochrome_led_index
ESLS/SR/ECP/BV-05-C [LED Control, Repeat, and Flashing Pattern – Any LED]	0

Table 4.6: LED Control, Repeat, and Flashing Pattern test cases

- Test Procedure

Execute the test procedure for each round specified in Table 4.7.

 1. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the LED Control opcode (0xB0) and:
 - ESL_ID set to the value from the initial condition
 - LED_Index set to the value in Table 4.6
 - Color_Red, Color_Green, and Color_Blue set to 0b11
 - Brightness set to 0b11
 - Flashing_Pattern set to the value in Table 4.7
 - Repeat_Type set to the value in Table 4.7
 - Repeats_Duration set to the value in Table 4.7
 2. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the LED State opcode with LED_Index set to the value from Step 1.
 3. The Upper Tester verifies that the LED with the LED_Index from Step 1 has the flashing pattern specified in Table 4.7.

Round	Repeat_Type	Repeats_Duration	Flashing			Pass Verdict
			Pattern	Bit Off Period	Bit On Period	
1	0b0	0	0x5555555555	0xFF (510 ms)	0x01 (2 ms)	LED off continuously
2	0b1	0	0x5555555555	0xFF (510 ms)	0x01 (2 ms)	LED on continuously

Round	Repeat_Type	Repeats_Duration	Flashing			Pass Verdict
			Pattern	Bit Off Period	Bit On Period	
3	0b1	0xF (15 s)	0x0000001041	0x32 (100 ms)	0xFA (500 ms)	On for 500 ms, off for 500 ms, on for 500 ms, off for 500 ms, and on for 500 ms for 15 s. Ignores upper 27 bits of the pattern. LED is off after the Repeats_Duration.
4	0b0	0x3	0x0000001041	0x32 (100 ms)	0xFA (500 ms)	On for 500 ms, off for 500 ms, on for 500 ms, off for 500 ms, and on for 1 s. Repeat three times. Ignores upper 27 bits of the pattern. LED is off after the Repeats_Duration.

Table 4.7: LED Control, Repeat, and Flashing Pattern rounds

- Expected Outcome

Pass verdict

In Step 3, the IUT sets the LED to the flashing pattern specified in [Table 4.7](#).

If Repeats_Duration as specified in [Table 4.7](#) is non-zero, then the Lower Tester verifies that the LED is off after the Repeats_Duration has elapsed.

ESLS/SR/ECP/BV-06-C [LED Timed Control]

- Test Purpose

Verify that the Server IUT properly handles the LED Timed Control and returns an error when an item is in the queue.

- Reference

[3] 3.9.2.11

- Initial Condition

- Enable the IUT for use with the ESL Control Point by performing the preamble described in [Section 4.2.3](#).
- The queue on the IUT used for the Time Control Point commands is empty.

- Test Procedure

1. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the LED Control opcode (0xB0) and:
 - ESL_ID set to the value in the initial condition
 - LED_Index set to 0
 - Brightness set to 3
2. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the LED State opcode with LED_Index set to 0.
3. The Lower Tester executes the GATT Write Characteristic Value sub-procedure for the ESL Current Absolute Time characteristic set to 10000 ms.



4. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the LED Timed Control opcode (0xF0) and:
 - ESL_ID set to the value in the initial condition
 - LED_Index set to 0
 - Color_Red, Color_Green, and Color_Blue set to 0b00
 - Brightness set to 1
 - Flashing_Pattern set to: Pattern = 0xFFFFFFFF, Bit_Off_Period: 0xFA (500 ms), Bit_On_Period: 0xFA (500 ms)
 - Repeat_Type set to 0b1
 - Repeats_Duration set to 0x0
 - Absolute_Time set to 20000
5. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the LED State opcode with LED_Index set to 0.
6. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Ping opcode (0x00) and ESL_ID set to the value in the initial condition.
7. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Basic State response with the Pending LED Update bit set to True.
8. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the LED Timed Control opcode (0xF0) and:
 - ESL_ID set to the value in Step 1
 - LED_Index set to 0
 - Color_Red, Color_Green, and Color_Blue set to 0b00
 - Brightness set to 3
 - Flashing_Pattern set to: Pattern = 0xFFFFFFFF, Bit_Off_Period: 0xFA (500 ms), Bit_On_Period: 0xFA (500 ms)
 - Repeat_Type set to 0b1
 - Repeats_Duration set to 0x0
 - Absolute_Time set to 30000
9. The IUT sends an ATT Error response to the Lower Tester with the error code Queue Full (0x0B).
10. The Upper Tester verifies that the LED changes to 50% brightness when the absolute time is 20000.
11. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Ping opcode (0x00) and ESL_ID set.
12. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Basic State response.

- Expected Outcome

Pass verdict

In Step 7, the Pending LED Update bit in the Basic State response is set to True.

In Step 9, the IUT returns the Queue Full error.

The LED changes to 50% brightness when the absolute time is 20000.

In Step 12, the Pending LED Update bit in the Basic State response is set to False.



ESLS/SR/ECP/BV-07-C [Display Image]

- Test Purpose

Verify that the Server IUT displays the requested pre-stored image on the indexed display when setting the Display Image opcode.

- Reference

[3] 3.9.2.8

- Initial Condition

- Enable the IUT for use with the ESL Control Point by performing the preamble described in Section 4.2.3.
- The IUT has preloaded images in the image storage locations with Image_Index values equal to 0 and Max_Image_Index.

- Test Procedure

1. The Lower Tester executes the GATT Characteristic Value Read procedure for the ESL Display Information characteristic.
2. The Lower Tester executes the GATT Characteristic Value Read procedure for the ESL Image Information characteristic.
3. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Display Image opcode (0x20) and:
 - ESL_ID set to the value in the initial condition
 - Display_Index set to one less than the number of Display Data Structures returned in Step 1
 - Image_Index set to Max_Image_index returned in Step 2
4. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Display State opcode.
5. The Upper Tester verifies that the image in Image_Index from Step 3 is displayed on the display with Display_Index from Step 3.
6. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Display Image opcode (0x20) and:
 - ESL_ID set to the value in the initial condition
 - Display_Index set to 0
 - Image_Index set to 0
7. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Display State opcode.
8. The Upper Tester verifies that the image with Image_Index 0 is displayed on the display with Display_Index 0.

- Expected Outcome

Pass verdict

In Steps 5 and 8, the IUT displays the requested image on the indexed display.

ESLS/SR/ECP/BV-08-C [Display Timed Image]

- Test Purpose

Verify that the Server IUT displays the requested pre-stored image on the indexed display at the set Absolute Time when setting the Display Timed Image opcode. The IUT also returns an error when an item is in the queue.

- Reference

[3] 3.9.2.9

- Initial Condition

- Enable the IUT for use with the ESL Control Point by performing the preamble described in Section 4.2.3.
- The queue on the IUT used for the Time Control Point command is empty.

- Test Procedure

1. The Lower Tester executes the GATT Characteristic Value Read procedure for the ESL Display Information characteristic.
2. The Lower Tester executes the GATT Characteristic Value Read procedure for the ESL Image Information characteristic.
3. The Lower Tester executes the GATT Write Characteristic Value sub-procedure for the ESL Current Absolute Time characteristic with a value of 30000.
4. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Display Timed Image opcode (0x60) and:
 - ESL_ID set to the value from the initial condition
 - Display_Index set to 0
 - Image_Index set to 0
 - Absolute_Time set to 40000
5. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Display State opcode.
6. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Ping opcode (0x00) and ESL_ID set.
7. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Basic State response and Pending Display Update set to True.
8. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Display Timed Image opcode (0x60) and:
 - ESL_ID set to the value from the initial condition
 - Display_Index set to 0
 - Image_Index set to 0
 - Absolute_Time set to 45000
9. The IUT sends an ATT Error response to the Lower Tester with the error code Queue Full (0x0B).
10. The Upper Tester verifies that Display_Index 0 is set to Image_Index 0 at absolute time 40000.
11. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Ping opcode (0x00) and ESL_ID set.
12. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Basic State response and Pending Display Update set to False.



- Expected Outcome

Pass verdict

The IUT displays the requested image at the specified time.

In Step 7, the IUT sends a Basic State response notification with the Pending Display Update bit is set to True.

In Step 9, the IUT returns the Queue Full error.

In Step 12, the IUT sends a Basic State response notification with the Pending Display Update bit set to False.

ESLS/SR/ECP/BV-09-C [Unassociate from AP]

- Test Purpose

Verify that the Server IUT is unassociated from the access point after receiving the Unassociate from AP opcode.

- Reference

[3] 3.9.2.2

- Initial Condition

- Enable the IUT for use with the ESL Control Point by performing the preamble described in Section 4.2.3.

- Test Procedure

1. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Unassociate from AP opcode (0x01) and ESL_ID set to the value in the initial condition.
2. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Basic State opcode.
3. The Upper Test verifies that the AP Sync Key, ESL Address, and ESL Response Key Material are empty.
4. The Lower Tester changes its Bluetooth address and initiates a connection request using a random key.

- Expected Outcome

Pass verdict

The IUT deletes the AP Sync Key, ESL Address, and ESL Response Key Material and requests to start the Bonding procedure.

ESLS/SR/ECP/BV-10-C [Read Sensor Data]

- Test Purpose

Verify that the Server IUT responds to setting the Read Sensor Data opcode and sends a Sensor Value ESL response.

- Reference

[3] 3.9.2.6



- Initial Condition
 - Enable the IUT for use with the ESL Control Point by performing the preamble described in Section 4.2.3.
- Test Procedure
 1. The Lower Tester executes the GATT Characteristic Value Read procedure for the ESL Sensor Information characteristic.
 2. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Read Sensor Data opcode (0x10) and:
 - ESL_ID set to the value in the initial condition
 - Sensor_Index set to one less than the number of ESL Sensor Information Structures returned in Step 1
 3. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Sensor Value opcode.
 4. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Read Sensor Data opcode (0x10) and:
 - ESL_ID set to the value in the initial condition
 - Sensor_Index set to 0
 5. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Sensor Value opcode.

- Expected Outcome

Pass verdict

In Steps 3 and 5, the IUT sends a Sensor Value ESL response with valid parameter values for the requested sensor.

ESLS/SR/ECP/BV-11-C [Refresh Display]

- Test Purpose

Verify that the Server IUT refreshes the indexed display when receiving the Refresh Display opcode from the Lower Tester.
- Reference

[3] 3.9.2.7
- Initial Condition
 - Enable the IUT for use with the ESL Control Point by performing the preamble described in Section 4.2.3.
 - Each display is not displaying an image.
 - The IUT has a preloaded image in the image storage location with the Image_Index value equal to Max_Image_Index.
- Test Procedure
 1. The Lower Tester executes the GATT Characteristic Value Read procedure for the ESL Display Information characteristic.
 2. The Lower Tester executes the GATT Characteristic Value Read procedure for the ESL Image Information characteristic.



3. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Refresh Display opcode (0x11) and:
 - ESL_ID set to the value in the initial condition
 - Display_Index set to one less than the number of Display Data elements returned in Step 1
 4. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Error opcode with a valid error code.
 5. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Display Image opcode (0x20) and:
 - ESL_ID set to the value in the initial condition
 - Display_Index set to one less than the number of Display Data Structures returned in Step 1
 - Image_Index set to Max_Image_index returned in Step 2
 6. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Display State opcode with Display_Index and Image_Index set to the values from Step 5.
 7. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Refresh Display opcode (0x11) and:
 - ESL_ID set to the value in the initial condition
 - Display_Index set to one less than the number of Display Data elements returned in Step 1
 8. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Display State opcode with Display_Index and Image_Index set to the values from Step 5.
- Expected Outcome

Pass verdict

In Step 4, the IUT sends a GATT Notification with the Error opcode and a valid error code.

In Step 7, the IUT refreshes the indexed display and sends a notification to the Lower Tester with the Display State opcode.

In Step 8, the IUT sends a GATT Notification for the Display State opcode with Display_Image and Image_Index set to the values from Step 5.

ESLS/SR/ECP/BV-12-C [Factory Reset]

- Test Purpose

Verify that the Server IUT unassociates from the AP and resets to its original state before association with the AP when receiving the Factory Reset opcode from the Lower Tester.
- Reference

[3] 3.9.2.4
- Initial Condition
 - Enable the IUT for use with the ESL Control Point by performing the preamble described in Section 4.2.3.



- Test Procedure
 1. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Factory Reset opcode (0x02) and:
 - ESL_ID set to the value in the initial condition
 2. Immediately after Step 1, the Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Ping opcode (0x00).
 3. The IUT may send a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Error opcode with error code set to Unspecified Error (0x01).
 4. The IUT disconnects the Bearer connection with the Lower Tester.
 5. The Lower Tester initiates a Connection Request using a random key.
 6. The Lower Tester starts the Bonding procedure, and the IUT and the Lower Tester exchange keys.

- Expected Outcome

Pass verdict

The IUT unassociates from the AP and reverts to its original state before association with the AP.

In Step 4, the IUT disconnects with the Lower Tester.

In Step 6, the Lower Tester requests to start the Bonding procedure, and keys are exchanged.

ESLS/SR/ECP/BV-13-C [Service Reset]

- Test Purpose

Verify that the Server IUT resets the Service Needed bit of the Basic State response when receiving a Service Reset procedure from the Lower Tester.

- Reference

[3] 3.9.2.3

- Initial Condition

- Enable the IUT for use with the ESL Control Point by performing the preamble described in Section 4.2.3.
- A condition that requires the Service Needed bit is defined by the TSPX_condition_service_required IXIT value.

- Test Procedure

1. The Upper Tester applies the TSPX_condition_service_required to establish a condition that requires the Service Needed bit.
2. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Ping opcode (0x00).
3. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Basic State opcode with the Service Needed bit set to 0b1.
4. The Upper Tester removes the condition that was applied in Step 1 so that the condition that required the Service Needed bit is no longer active.
5. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Service Reset opcode (0x02).



6. The IUT sends a GATT Characteristic Value Notification for the ESL Control Point to the Lower Tester with the Basic State opcode and the Service Needed bit set to 0b0.
7. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Ping opcode (0x00).
8. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Basic State opcode with the Service Needed bit set to 0b0.

- Expected Outcome

Pass verdict

In Step 8, the IUT returns the condition of the Service Needed bit.

4.5.3 Timed Control Point Commands, Replace Queued Command

- Test Purpose

Verify that the Server IUT properly replaces a Timed Control Point command with an absolute time that is the same as a queued command.

- Initial Condition

- Enable the IUT for use with the ESL Control Point by performing the preamble described in Section 4.2.3.

- Test Case Configuration

TCID	Reference [3]	Command/ Response	Parameters	
			Step 1	Step 3
ESLS/SR/ECP/BV-14-C [Timed Control Point Commands, Replace Queued Command, LED Timed Control]	3.9.2.11.1	LED Timed Control LED State	LED_Index = 0 Color_Red = 0b11 Color_Green = 0b00 Color_Blue = 0b00	LED_Index = 0 Color_Red = 0b00 Color_Green = 0b00 Color_Blue = 0b11
ESLS/SR/ECP/BV-15-C [Timed Control Point Commands, Replace Queued Command, Display Timed Image]	3.9.2.9.1	Display Timed Image Display State	Display_Index = 0 Image_Index = 0x00	Display_Index = 0 Image_Index = 0x01

Table 4.8: Timed Control Point Commands, Replace Queued Command test cases

- Test Procedure

1. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Control Point opcode and Parameters set to the value specified in Table 4.8 and Absolute_Time set to a random value at least 30 seconds in the future.
2. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the response specified in Table 4.8.
3. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Control Point opcode and Parameters set to the value specified in Table 4.8 and Absolute_Time set to the same value in Step 1.
4. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the response specified in Table 4.8.
5. At the Absolute Time specified in Step 1, the Upper Tester verifies that the IUT executes the parameters from Step 3.



- Expected Outcome

Pass verdict

In Step 5, the IUT executes the parameters from Step 3.

4.5.4 Control Point Error Response

- Test Purpose

Verify that the Server IUT properly returns an Error response when the IUT does not have the capability for the Control Point opcode sent by the Lower Tester.

- Reference

[3] 3.9.2

- Initial Condition

- Enable the IUT for use with the ESL Control Point by performing the preamble described in Section 4.2.3.
- The IUT is not transmitting connectable advertising.

- Test Case Configuration

TCID	Control Point Opcode
ESLS/SR/ECP/BI-01-C [Control Point Error Response, LED Control]	LED Control
ESLS/SR/ECP/BI-02-C [Control Point Error Response, LED Timed Control]	LED Timed Control
ESLS/SR/ECP/BI-03-C [Control Point Error Response, Display Image]	Display Image
ESLS/SR/ECP/BI-04-C [Control Point Error Response, Display Time Image]	Display Time Image
ESLS/SR/ECP/BI-05-C [Control Point Error Response, Read Sensor Data]	Read Sensor Data
ESLS/SR/ECP/BI-06-C [Control Point Error Response, Refresh Display]	Refresh Display
ESLS/SR/ECP/BI-07-C [Control Point Error Response, Vendor-specific Tag]	Vendor-specific Tag

Table 4.9: Ignore Unsupported Opcode Test Cases

- Test Procedure

1. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Control Point opcode set to the value from Table 4.9.
2. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Error opcode.

- Expected Outcome

Pass verdict

In Step 2, the IUT returns an Error opcode.

4.5.5 Control Point, Invalid Index

- Test Purpose

Verify that the Server IUT properly returns an Error response when the IUT receives a control point command for a capability with an invalid index.



- Reference
[3] 3.9.2
- Initial Condition
 - Enable the IUT for use with the ESL Control Point by performing the preamble described in Section 4.2.3.
 - The IUT is not transmitting connectable advertising.
- Test Case Configuration

TCID	Control Point Opcode	Characteristic(s)
ESLS/SR/ECP/BI-08-C [Control Point Invalid Index, Sensor Data]	Read Sensor Data	ESL Sensor Information
ESLS/SR/ECP/BI-09-C [Control Point Invalid Index, Refresh Display]	Refresh Display	ESL Display Information
ESLS/SR/ECP/BI-10-C [Control Point Error Response, LED Control]	LED Control	ESL LED Information
ESLS/SR/ECP/BI-11-C [Control Point Error Response, LED Timed Control]	LED Timed Control	ESL LED Information

Table 4.10: Control Point, Invalid Index test cases

- Test Procedure
 1. The Lower Tester executes the GATT Characteristic Value Read procedure for the characteristic specified in Table 4.10. The number of array elements returned is stored for future use.
 2. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Control Point opcode set to the value from Table 4.10 and:
 - ESL_ID set to the value in the initial condition
 - Index set to one more than the value stored in Step 1
 3. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with an Error Code > 0.

- Expected Outcome

Pass verdict

In Step 3, the IUT returns an Error Code > 0.

4.5.6 Control Point, Invalid Index, Display Commands

- Test Purpose

Verify that the Server IUT properly returns an Error response when the IUT receives a display control point command for a device with an invalid index.
- Reference
[3] 3.9.2
- Initial Condition
 - Enable the IUT for use with the ESL Control Point by performing the preamble described in Section 4.2.3.
 - The IUT is not transmitting connectable advertising.



- Test Case Configuration

TCID	Control Point Opcode
ESLS/SR/ECP/BI-12-C [Control Point Invalid Index, Display Image]	Display Image
ESLS/SR/ECP/BI-13-C [Control Point Error Response, Display Time Image]	Display Time Image

Table 4.11: Control Point, Invalid Index, Display Commands test cases

- Test Procedure

1. The Lower Tester executes the GATT Characteristic Value Read procedure for the Display Information characteristic. The number of array elements returned is stored for future use.
2. The Lower Tester executes the GATT Characteristic Value Read procedure for the Image Information characteristic. The Max_Image_Index value is stored for future use.
3. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Control Point opcode set to the value from [Table 4.11](#) and:
 - ESL_ID set to the value in the initial condition
 - Display_Index set to one more than the value stored in Step 1
 - Image_Index set to 0
4. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with an Error Code > 0.
5. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Control Point opcode set to the value from [Table 4.11](#) and:
 - ESL_ID set to the value in the initial condition
 - Display_Index set to 0
 - Image_Index set to one more than the value stored in Step 2
6. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with an Error Code > 0.

- Expected Outcome

Pass verdict

In Step 4, the IUT returns an Error Code > 0.

In Step 6, the IUT returns an Error Code > 0.

[ESLS/SR/ECP/BI-14-C \[Reject Command with Invalid ESL ID\]](#)

- Test Purpose

Verify that the Server IUT rejects an incoming ESL Control Point procedure with an incorrect ESL ID.

- Reference

[\[3\]](#) 3.9.2

- Initial Condition

- Enable the IUT for use with the ESL Control Point by performing the preamble described in [Section 4.2.3](#).



- Test Procedure
 1. The Lower Tester executes the GATT Write Characteristic Value sub-procedure to the IUT for the ESL Address characteristic with ESL_ID set to 0b01010101 and Group_ID set to the same value as in the initial condition.
 2. The Lower Tester executes the GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Ping opcode (0x00) with ESL_ID set to 0b01010100 and Group_ID set to the same value as in the initial condition.
 3. The IUT sends an ESL Error response to the Lower Tester with the error code Invalid Parameter(s) (0x06).

- Expected Outcome

Pass verdict

In Step 3, the IUT responds with the 0x06 (Invalid Parameters) ESL Error response.

ESLS/SR/ECP/BV-16-C [LED Control, Replace Active Command]

- Test Purpose

Verify that the Server IUT properly replaces an existing LED Control active command with a new command.

- Reference

[3] 3.9.2.10

- Initial Condition

- The index of a monochrome LED is defined by the TSPX_monochrome_led_index IXIT value.
- Enable the IUT for use with the ESL Control Point by performing the preamble described in Section 4.2.3.

- Test Procedure

1. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the LED Control opcode (0xB0) and:
 - ESL_ID set to the value from the initial condition
 - LED_Index set to 0
 - Color_Red, Color_Green, and Color_Blue set to 0b11
 - Brightness set to 0b11
 - Flashing_Pattern set to Pattern: 0x0000001041, Bit_Off_Period: 0x32 (100 ms), Bit_On_Period: 0xFA (500 ms)
 - Repeat_Type set to 0b0
 - Repeats_Duration set to 0x7FFF
2. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the LED State opcode with LED_Index set to 0.
3. The Upper Tester verifies that the LED blinks with the LED On time being 500 ms and the LED Off time being 500 ms.
4. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the LED Control opcode (0xB0) and:
 - ESL_ID set to the value from the initial condition
 - LED_Index set to 0



- Color_Red, Color_Green, and Color_Blue set to 0b11
 - Brightness set to 0b11
 - Flashing_Pattern set to Pattern: 0xAAAAAAAAAA, Bit_Off_Period: 0x7D (250 ms), Bit_On_Period: 0x7D (250 ms)
 - Repeat_Type set to 0b0
 - Repeats_Duration set to 0x7FFF
5. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the LED State opcode with LED_Index set to 0.
 6. The Upper Tester verifies that the LED blinks with the LED On time being 250 ms and the LED Off time being 250 ms.
- Expected Outcome

Pass verdict

After Step 5, the IUT changes from blinking once a second to twice a second.

ESLS/SR/ECP/BV-17-C [LED Timed Control, Replace Active Command]

- Test Purpose

Verify that the Server IUT properly replaces an existing LED Timed Control active command with a new command.
- Reference

[3] 3.9.2.11
- Initial Condition
 - The index of a monochrome LED is defined by the TSPX_monochrome_led_index IXIT value.
 - Enable the IUT for use with the ESL Control Point by performing the preamble described in Section 4.2.3.
- Test Procedure
 1. The Lower Tester executes the GATT Write Characteristic Value sub-procedure for the ESL Current Absolute Time characteristic set to 10000 ms.
 2. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the LED Timed Control opcode (0xF0) and:
 - ESL_ID set to the value from the initial condition
 - LED_Index set to 0
 - Color_Red set to 0b00
 - Color_Green set to 0b00
 - Color_Blue set to 0b00
 - Brightness set to 0b11
 - Flashing_Pattern set to Pattern: 0x0000001041, Bit_Off_Period: 0x32 (100 ms), Bit_On_Period: 0xFA (500 ms)
 - Repeat_Type set to 0b0
 - Repeats_Duration set to 0x7FFF
 - Absolute_Time set to 15000
 3. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the LED State opcode with LED_Index set to 0.
 4. 6 seconds after Step 2, the Upper Tester verifies that the LED blinks with the LED On time being 500 ms and the LED Off time being 500 ms.



5. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the LED Timed Control opcode (0xB0) and:
 - ESL_ID set to the value from the initial condition
 - LED_Index set to 0
 - Color_Red set to 0b00
 - Color_Green set to 0b00
 - Color_Blue set to 0b00
 - Brightness set to 0b11
 - Flashing_Pattern set to Pattern: 0xAAAAAAAAAA, Bit_Off_Period: 0x7D (250 ms), Bit_On_Period: 0x7D (250 ms)
 - Repeat_Type set to 0b0
 - Repeats_Duration set to 0x7FFF
 - Absolute_Time set to 26000
6. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the LED State opcode with LED_Index set to 0.
7. 6 seconds after Step 5, the Upper Tester verifies that the LED blinks with the LED On time being 250 ms and the LED Off time being 250 ms.

- Expected Outcome

Pass verdict

After Step 6, the IUT changes from blinking once a second to twice a second.

4.5.7 Timed Control Point Commands, Invalid Absolute Time Parameter

- Test Purpose

Verify that the Server IUT properly returns an Implausible Absolute Time error when calling the Timed Control Point commands with an Absolute Time parameter that is more than 48 days in the future.

- Initial Condition

- Enable the IUT for use with the ESL Control Point by performing the preamble described in Section 4.2.3.

- Test Case Configuration

TCID	Reference [3]	Command
ESLS/SR/ECP/BI-15-C [Timed Control Point Commands, Invalid Absolute Time Parameter, LED Timed Control]	3.9.2.11.1	LED Timed Control
ESLS/SR/ECP/BI-16-C [Timed Control Point Commands, Invalid Absolute Time Parameter, Display Timed Image]	3.9.2.9.1	Display Timed Image

Table 4.12: Timed Control Point Commands, Invalid Absolute Time Parameter test cases

- Test Procedure

1. The Lower Tester executes the GATT Write Characteristic Value sub-procedure for the ESL Current Absolute Time characteristic with a value of 123.



2. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Control Point opcode specified in [Table 4.12](#) and Absolute_Time set to 4150800123.
3. The IUT sends an ATT Error response to the Lower Tester with the error code Implausible Absolute Time (0x0C).

- Expected Outcome

Pass verdict

In Step 3, the IUT responds with the 0x0C.

4.5.8 Timed Control Point Commands, Absolute Time set to 0

- Test Purpose

Verify that the Server IUT properly deletes a queued Timed Control Point command when the Timed Control Point command is called again when the Absolute_Time parameter is set to 0.

- Initial Condition

- Enable the IUT for use with the ESL Control Point by performing the preamble described in [Section 4.2.3](#).

- Test Case Configuration

TCID	Reference [3]	Command/ Response/ Pending Update	Parameters	
			Step 1	Step 5
ESLS/SR/ECP/BV-18-C [Timed Control Point Commands, Absolute Time set to 0, LED Timed Control]	3.9.2.11.1	LED Timed Control LED State Pending LED Update	LED_Index = 0 Color_Red = 0b11 Color_Green = 0b00 Color Blue = 0b00	LED_Index = 0 Color_Red = 0b00 Color_Green = 0b00 Color Blue = 0b11
ESLS/SR/ECP/BV-19-C [Timed Control Point Commands, Absolute Time set to 0, Display Timed Image]	3.9.2.9.1	Display Timed Image Display State Pending Display Update	Display_Index = 0 Image_Index = 0x00	Display_Index = 0 Image_Index = 0x01

Table 4.13: Timed Control Point Commands, Absolute Time set to 0 test cases

- Test Procedure

1. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Control Point opcode and Parameters set to the value specified in [Table 4.13](#) and Absolute_Time set to a random value between 15 and 30 seconds in the future.
2. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the response specified in [Table 4.13](#).
3. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Ping opcode (0x00) and ESL_ID set to the value in Step 1.
4. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Basic State response with the Pending Update bit specified in [Table 4.13](#) set to True.



5. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Control Point opcode and Parameters set to the value specified in [Table 4.13](#) and Absolute_Time set to 0.
6. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the response specified in [Table 4.13](#).
7. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Ping opcode (0x00) and ESL_ID set to the value in the initial condition.
8. The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Basic State response with the Pending Update bit specified in [Table 4.13](#) set to False.
9. Thirty seconds later, the Upper Tester confirms that the Timed command in Step 1 is not executed.

- Expected Outcome

Pass verdict

The IUT does not execute the command in Step 1.

In Step 4, the IUT sends the Basic State response with the Pending Update bit set to True.

In Step 8, the IUT sends the Basic State response with the Pending Update bit set to False.

ESLS/SR/ECP/BV-20-C [Update Complete]

- Test Purpose

Verify that the Server IUT synchronizes with the access point and disconnects the ACL with the access point.

- Reference

[\[3\]](#) 3.9.2.5

- Initial Condition

- Enable the IUT for use with the ESL Control Point by performing the preamble described in [Section 4.2.3](#).

- Test Procedure

1. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Update Complete opcode (0x04) and ESL_ID set to the value in the initial condition.
2. The IUT synchronizes with the Lower Tester and receives PAwR synchronization packets.
3. The IUT disconnects the ACL connection with the Lower Tester.

- Expected Outcome

Pass verdict

In Step 2, the IUT synchronizes with the Lower Tester.

In Step 3, the IUT disconnects from the Lower Tester.



4.5.9 Timed Control Point Command Per Element

- Test Purpose

Verify that the Server IUT has one Timed Control command per element. The IUT has one LED Timed Control command per LED element and one Display Timed Image command per display.

- Initial Condition

- Enable the IUT for use with the ESL Control Point by performing the preamble described in Section 4.2.3.

- Test Case Configuration

TCID	Reference	Characteristic
ESLS/SR/ECP/BV-21-C [Timed Control Point Command Per Element, LED]	[3] 3.9.2.11	ESL LED Information characteristic
ESLS/SR/ECP/BV-22-C [Timed Control Point Command Per Element, Display]	[3] 3.9.2.9	ESL Display Information characteristic

Table 4.14: Timed Control Point Command Per Element test cases

- Test Procedure

1. The Lower Tester executes the GATT Characteristic Value Read procedure for the characteristic specified in Table 4.14. The number of array elements returned is stored for future use.
2. The Lower Tester executes the GATT Write Characteristic Value sub-procedure for the ESL Current Absolute Time characteristic set to 10000 ms.

Repeat Steps 3–4 for the number of elements in Step 1:

3. Perform alternative 3A or 3B depending on the Timed Control Point.

Alternative 3A (LED Timed Control Point):

- 3A.1 The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the LED Timed Control opcode (0xF0) and:
 - ESL_ID set to the value in the initial condition
 - LED_Index set to Element Index
 - Color_Red, Color_Green, and Color_Blue set to 0b00
 - Brightness set to 1
 - Flashing_Pattern set to: Pattern = 0xFFFFFFFF, Bit_Off_Period: 0xFA (500 ms), Bit_On_Period: 0xFA (500 ms)
 - Repeat_Type set to 0b1
 - Repeats_Duration set to 0x0
 - Absolute_Time set to a random time within 120 seconds in the future and not within 5 seconds from any other round
- 3A.2 The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the LED State opcode with LED_Index set to the value in Step 3A.1.

Alternative 3B (Display Timed Image Control Point):

- 3B.1 The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Display Timed Image opcode (0x60) and:
 - ESL_ID set to the value from the initial condition
 - Display_Index set to Element Index



- Image_Index set to 0
 - Absolute_Time set to a random time within 120 seconds in the future and not within 5 seconds from any other round
- 3B.2 The IUT sends a GATT Characteristic Value Notification to the Lower Tester for the ESL Control Point with the Display State opcode.
4. For the next 120 seconds, the Upper Tester confirms that each Element Index changes at the Absolute_Time set in Step 3A.1 or 3B.1.
- Expected Outcome
- Pass verdict
- Each LED or each display is enabled at different times within 120 seconds.

4.6 Updating state

ESLS/SR/UPD/BV-01-C [Ignore Periodic Advertising with Responses data]

- Test Purpose
- Verify that the Server IUT in the Updating State ignores all Periodic Advertising with Responses PDUs.
- Reference
- [3] 2.7.3.4
- Initial Condition
- The IUT has an active ATT or EATT Bearer connection with the Lower Tester.
 - The IUT is in the Updating State using the preamble in Section 4.2.4 and Group_ID set to 3.
- Test Procedure
1. The Lower Tester executes the GATT Write Characteristic Value sub-procedure to the IUT for the AP Synchronization Key characteristic with an AP Synchronization Key.
 2. The Lower Tester executes the GATT Write Characteristic Value sub-procedure to the IUT for the ESL Response Key characteristic with an ESL Response Key.
 3. The Lower Tester executes the GATT Write Characteristic Value sub-procedure to the IUT for the ESL Current Absolute Time Characteristic with a current time.
 4. The Lower Tester disconnects the active connection.
 5. The Lower Tester initiates a connection with the IUT.
 6. The Lower Tester sends a PAwR synchronization packet in the third slot with the Factory Reset opcode.
 7. The IUT is not returned to the factory state.
 8. The Lower Tester disconnects the active connection.
 9. If the IUT has at least one display, then execute the following:
 - 9.A The Lower Tester sends a PAwR synchronization packet in the third slot with the Display Information opcode.
 - 9.B The IUT responds to Step 9.A with a Display State response.
 10. If the IUT has at least one LED, then execute the following:
 - 10.A The Lower Tester sends a PAwR synchronization packet in the third slot with the LED State response.
 - 10.B The IUT responds to Step 10.A with an LED State response.

- Expected Outcome

Pass verdict

In Step 8, the IUT does not return to the factory state.

In Step 9.B, the IUT responds with a Display State response.

In Step 10.B, the IUT responds with an LED State response.

4.7 State change

ESLS/SR/SC/BV-01-C [State Change, Link Loss, Configuring to Unassociated]

- Test Purpose

Verify that the Server IUT in the Configuring state enters the Unassociated state when the ATT/EATT bearer connection is disconnected. To verify that the Unassociated state, the Lower Tester and the IUT reconnect, sync, the Lower Tester sends a Ping command, and the IUT responds with the Basic State response.

- Reference

[3] 2.7.3.2.1

- Initial Condition

- The IUT is in the Unassociated state.

- Test Procedure

1. The IUT enters the GAP Undirected Connectible mode and transmits advertising packets containing the ESL Service UUID.
2. Establish a Bearer connection between the Lower Tester and the IUT as described in Section 4.2.1, if using ATT over an LE transport, or Section 4.2.2 if using EATT over an LE transport.
3. The Lower Tester executes the GATT Write Characteristic Value sub-procedure to the IUT for the ESL Address characteristic with an ESL Address.
4. The Lower Tester disconnects the bearer connection from Step 2.
5. The Lower Tester initiates a connection with the IUT.
6. The IUT and the Lower Tester elevate security using the previous link key.
7. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Update Complete opcode (0x04).
8. The IUT synchronizes with the Lower Tester and receives PAwR synchronization packets.
9. The Lower Tester sends a PAwR synchronization packet with the Ping opcode.
10. The IUT responds with the Basic State response.

- Expected Outcome

Pass verdict

In Step 9, the IUT sends a Basic State response.

ESLS/SR/SC/BV-02-C [State Change, Link Loss, Configured to Unsynchronized]

- Test Purpose

Verify that the Server IUT in the Configured state enters the Unsynchronized state when the link is lost after configuration. To verify that the device is in the Unsynchronized state, the IUT enters the



Updating state, completes the Update procedure, enters the Synchronized state, and responds to a Ping command from the Lower Tester.

- Reference
 - [3] 2.7.3.2.1
- Initial Condition
 - The IUT is in the Configured state using the Preamble in Section 4.2.4.
- Test Procedure
 1. The Lower Tester disconnects the bearer connection.
 2. The IUT enters the GAP Undirected Connectable mode and transmits advertising packets containing the ESL Service UUID.
 3. The Lower Tester initiates a connection with the IUT.
 4. The IUT and the Lower Tester elevate security using the previous link key.
 5. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Update Complete opcode (0x04).
 6. The IUT synchronizes with the Lower Tester and receives PAwR synchronization packets.
 7. The Lower Tester sends a PAwR synchronization packet with the Ping opcode.
 8. The IUT responds with the Basic State response.
- Expected Outcome
 - Pass verdict
 - In Step 6, the IUT enters the Synchronized state.
 - In Step 8, the IUT responds with a Basic State response.

ESLS/SR/SC/BV-03-C [State Change, Link Loss, Updating to Unsynchronized]

- Test Purpose

Verify that the Server IUT in the Updating state enters the Unsynchronized state when the link is lost after configuration. The IUT starts in the Synchronized state, transitions into the Updating state, then transitions into the Unsynchronized state when the link is lost. To verify that the device is in the Unsynchronized state, the IUT enters the Updating state, completes the Update procedure, enters the Synchronized state, and responds to a Ping command from the Lower Tester.
- Reference
 - [3] 2.7.3.4.1
- Initial Condition
 - The IUT is in the Synchronized state using the Preamble in Section 4.2.5.
- Test Procedure
 1. The Upper Tester orders the IUT to begin sending connectable advertising packets.
 2. The Lower Tester initiates a connection to the IUT.
 3. The Lower Tester disconnects the IUT.
 4. The Lower Tester initiates a connection with the IUT.
 5. The IUT and the Lower Tester elevate security using the previous link key.



6. The Lower Tester executes the GATT Write Without Response sub-procedure or GATT Write Characteristic Value sub-procedure for the ESL Control Point with the Update Complete opcode (0x04).
7. The IUT synchronizes with the Lower Tester and receives PAwR synchronization packets.
8. The Lower Tester sends a PAwR synchronization packet with the Ping opcode.
9. The IUT responds with the Basic State response.

- Expected Outcome

- Pass verdict

In Step 2, the IUT has entered the Unsynchronized state by entering the GAP Undirected Connectible mode.

In Step 7, the IUT enters the Synchronized state.

In Step 9, the IUT responds with a Basic State response.

5 Test case mapping

The Test Case Mapping Table (TCMT) maps test cases to specific requirements in the ICS. The IUT is tested in all roles for which support is declared in the ICS document.

The columns for the TCMT are defined as follows:

Item: Contains a logical expression based on specific entries from the associated ICS document. Contains a logical expression (using the operators AND, OR, NOT as needed) based on specific entries from the applicable ICS document(s). The entries are in the form of y/x references, where y corresponds to the table number and x corresponds to the feature number as defined in the ICS document for Electronic Shelf Label Service [4].

If a test case is mandatory within the respective layer, then the y/x reference is omitted.

Feature: A brief, informal description of the feature being tested.

Test Case(s): The applicable test case identifiers are required for Bluetooth Qualification if the corresponding y/x references defined in the Item column are supported. Further details about the function of the TCMT are elaborated in [2].

For the purpose and structure of the ICS/IXIT, refer to [2].

Item	Feature	Test Case(s)
ESLS 2/2	Service GGIT, Electronic Shelf Label	ESLS/SR/SGGIT/SER/BV-01-C ESLS/SR/UPD/BV-01-C ESLS/SR/SC/BV-01-C ESLS/SR/SC/BV-02-C ESLS/SR/SC/BV-03-C
ESLS 3/1	ESL Address Characteristic	ESLS/SR/SGGIT/CHA/BV-01-C ESLS/SR/CHA/BI-01-C
ESLS 3/2	AP Sync Key Characteristic	ESLS/SR/SGGIT/CHA/BV-02-C
ESLS 3/3	ESL Response Key Characteristic	ESLS/SR/SGGIT/CHA/BV-03-C
ESLS 3/4	ESL Current Absolute Time Characteristic	ESLS/SR/SGGIT/CHA/BV-04-C ESLS/SR/CHA/BV-01-C
ESLS 3/5	ESL Display Information Characteristic	ESLS/SR/SGGIT/CHA/BV-05-C ESLS/SR/CHA/BV-02-C
ESLS 3/5 AND ESLS 3/10	ESL Display Information Characteristic, One Display	ESLS/SR/CHA/BV-05-C
ESLS 3/6	ESL Image Information Characteristic	ESLS/SR/SGGIT/CHA/BV-06-C
ESLS 3/7	ESL Sensor Information Characteristic	ESLS/SR/SGGIT/CHA/BV-07-C ESLS/SR/CHA/BV-03-C
ESLS 3/7 AND ESLS 3/14	ESL Sensor Information Characteristic, One Sensor	ESLS/SR/CHA/BV-06-C
ESLS 3/8	ESL LED Information Characteristic	ESLS/SR/SGGIT/CHA/BV-08-C ESLS/SR/CHA/BV-04-C
ESLS 3/8 AND ESLS 3/12	ESL LED Information Characteristic, One LED	ESLS/SR/CHA/BV-07-C
ESLS 3/9	ESL Control Point Characteristic	ESLS/SR/SGGIT/CHA/BV-09-C
ESLS 4/1	Ping	ESLS/SR/ECP/BV-01-C ESLS/SR/ECP/BI-14-C

Item	Feature	Test Case(s)
ESLS 4/2 AND ESLS 3/19	LED Control, Color	ESLS/SR/ECP/BV-02-C
ESLS 4/2 AND ESLS 3/12 AND ESLS 3/18	LED Control, Monochrome	ESLS/SR/ECP/BV-03-C ESLS/SR/ECP/BV-04-C
ESLS 4/2 AND (ESLS 3/12 OR ESLS 3/13)	LED Control	ESLS/SR/ECP/BV-05-C ESLS/SR/ECP/BV-16-C ESLS/SR/ECP/BI-10-C
ESLS 4/3 AND (ESLS 3/12 OR ESLS 3/13)	LED Timed Control	ESLS/SR/ECP/BV-06-C ESLS/SR/ECP/BV-17-C ESLS/SR/ECP/BV-18-C ESLS/SR/ECP/BI-11-C ESLS/SR/ECP/BI-15-C
ESLS 4/3 AND ESLS 3/13	LED Timed Control, More Than One LED	ESLS/SR/ECP/BV-21-C
ESLS 4/3 AND (ESLS 3/12 OR ESLS 3/13) AND ESLS 3/17	LED Timed Control, Color	ESLS/SR/ECP/BV-14-C
ESLS 4/4 AND (ESLS 3/10 OR ESLS 3/11)	Display Image	ESLS/SR/ECP/BV-07-C ESLS/SR/ECP/BI-12-C
ESLS 4/5 AND (ESLS 3/10 OR ESLS 3/11)	Display Timed Image	ESLS/SR/ECP/BV-08-C ESLS/SR/ECP/BV-15-C ESLS/SR/ECP/BV-19-C ESLS/SR/ECP/BI-13-C ESLS/SR/ECP/BI-16-C
ESLS 4/5 AND ESLS 3/11	Display Timed Image, More Than One Display	ESLS/SR/ECP/BV-22-C
ESLS 4/6	Unassociate from AP	ESLS/SR/ECP/BV-09-C
ESLS 4/7 AND (ESLS 3/14 OR ESLS 3/15)	Read Sensor Data	ESLS/SR/ECP/BV-10-C ESLS/SR/ECP/BI-08-C
ESLS 4/8 AND (ESLS 3/10 OR ESLS 3/11)	Refresh Display	ESLS/SR/ECP/BV-11-C ESLS/SR/ECP/BI-09-C
ESLS 4/9	Factory Reset	ESLS/SR/ECP/BV-12-C
ESLS 4/11	Service Reset	ESLS/SR/ECP/BV-13-C
ESLS 4/10	Vendor-specific Tag	ESLS/SR/ECP/BI-07-C
ESLS 4/2 AND NOT ESLS 3/12 AND NOT ESLS 3/13	LED Control, No LED Support	ESLS/SR/ECP/BI-01-C
ESLS 4/3 AND NOT ESLS 3/12 AND NOT ESLS 3/13	LED Timed Control, No LED Support	ESLS/SR/ECP/BI-02-C
ESLS 4/4 AND NOT ESLS 3/10 AND NOT ESLS 3/11	Display Image, No Display Support	ESLS/SR/ECP/BI-03-C

Item	Feature	Test Case(s)
ESLS 4/5 AND NOT ESLS 3/10 AND NOT ESLS 3/11	Display Timed Image, No Display Support	ESLS/SR/ECP/BI-04-C
ESLS 4/7 AND NOT ESLS 3/14 AND NOT ESLS 3/15	Read Sensor Data, No Sensor Support	ESLS/SR/ECP/BI-05-C
ESLS 4/8 AND NOT ESLS 3/10 AND NOT ESLS 3/11	Refresh Display, No Display Support	ESLS/SR/ECP/BI-06-C
ESLS 4/12	Update Complete	ESLS/SR/ECP/BV-20-C

Table 5.1: Test case mapping

6 Revision history and acknowledgments

Revision History

Publication Number	Revision Number	Date	Comments
0	p0	2023-04-04	Approved by BTI on 2023-03-27. ESLS v1.0 adopted by the BoD on 2023-03-28. Prepared for initial publication.
	p1r00-r02	2023-08-15 – 2023-10-09	TSE 22893 (rating 1): Added “ESL” to relevant characteristic names and test case descriptions for ESLS/SR/SGGIT/CHA/BV-05-C – -08-C; ESLS/SR/CHA/BV-02-C – -07-C; ESLS/SR/ECP/BV-02-C, -07-C, -08-C, -10-C, -11-C; and ESLS/SR/ECP/BI-08-C – -11-C, -21-C, and -22-C. Updated the TCMT accordingly. TSE 23182 (rating 3): Updated the test procedure and expected outcome for ESLS/SR/ECP/BI-12-C and -13-C.
1	p1	2024-07-01	Approved by BTI on 2024-04-21. Prepared for TCRL 2024-1 publication.
	p2r00-r01	2024-10-03 – 2024-11-05	TSE 24463 (rating 3): Per E24211, updated the test procedure and Pass verdict for ESLS/SR/ECP/BV-09-C. TSE 24635 (rating 2): Updated the error code in the test procedure and expected outcome for TCs ESLS/SR/ECP/BI-08-C – -13-C. Performed minor editorial work to align with the current TS template.
2	p2	2025-02-18	Approved by BTI on 2024-12-23. Prepared for TCRL 2025-1 publication.
	p3r00-r02	2025-02-05 – 2025-05-07	TSE 24464 (rating 4): Per E24214, in the “ESLS TC feature naming conventions” table, added the SC feature identifier. In the “Setup preambles” section, added the “Configured state” and “Synchronized state” sections. Added the “State change” section and in it test cases ESLS/SR/SC/BV-01-C – -03-C. TSE 26855 (rating 2): Updated the ESL Control Point preamble.
3	p3	2025-07-08	Approved by BTI on 2025-06-15. ESLS v1.0.1 adopted by the BoD on 2025-06-30. Prepared for TCRL pkg100 publication.
	p4r00-r02	2025-11-17 – 2026-01-13	TSE 27753 (rating 2): Per E26855, removed the configuration test steps in the tests that have the configuration setup in the initial condition: ESLS/SR/ECP/BV-01-C – -22-C, ESLS/SR/ECP/BI-01-C – -16C, and ESLS/SR/UPD/BV-01-C.
4	p4	2026-02-17	Approved by BTI on 2026-01-21. Prepared for TCRL pkg102 publication.

Acknowledgments

Name	Company
Dejan Berec	Bluetooth SIG, Inc.
Gene Chang	Bluetooth SIG, Inc.

