Generic Attribute Profile (GATT)

***Bluetooth*® Test Suite**

- **Revision:** GATT.TS.p31
- **Revision Date:** 2026-11-03
- **Prepared By:** BTI
- **Published during TCRL:** TCRL.pkg105

This document, regardless of its title or content, is not a Bluetooth Specification as defined in the Bluetooth Patent/Copyright License Agreement ("PCLA") and Bluetooth Trademark License Agreement. Use of this document by members of Bluetooth SIG is governed by the membership and other related agreements between Bluetooth SIG Inc. ("Bluetooth SIG") and its members, including the PCLA and other agreements posted on Bluetooth SIG's website located at www.bluetooth.com.

THIS DOCUMENT IS PROVIDED "AS IS" AND BLUETOOTH SIG, ITS MEMBERS, AND THEIR AFFILIATES MAKE NO REPRESENTATIONS OR WARRANTIES AND DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, TITLE, NON-INFRINGEMENT, FITNESS FOR ANY PARTICULAR PURPOSE, THAT THE CONTENT OF THIS DOCUMENT IS FREE OF ERRORS.

TO THE EXTENT NOT PROHIBITED BY LAW, BLUETOOTH SIG, ITS MEMBERS, AND THEIR AFFILIATES DISCLAIM ALL LIABILITY ARISING OUT OF OR RELATING TO USE OF THIS DOCUMENT AND ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING LOST REVENUE, PROFITS, DATA OR PROGRAMS, OR BUSINESS INTERRUPTION, OR FOR SPECIAL, INDIRECT, CONSEQUENTIAL, INCIDENTAL OR PUNITIVE DAMAGES, HOWEVER CAUSED AND REGARDLESS OF THE THEORY OF LIABILITY, AND EVEN IF BLUETOOTH SIG, ITS MEMBERS, OR THEIR AFFILIATES HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

This document is proprietary to Bluetooth SIG. This document may contain or cover subject matter that is intellectual property of Bluetooth SIG and its members. The furnishing of this document does not grant any license to any intellectual property of Bluetooth SIG or its members.

This document is subject to change without notice.

Copyright © 2010–2026 by Bluetooth SIG, Inc. The Bluetooth word mark and logos are owned by Bluetooth SIG, Inc. Other third-party brands and names are the property of their respective owners.

Contents

1 Scope 10

2 References, definitions, and abbreviations 11

2.1 References 11
2.2 Definitions 11
2.3 Acronyms and abbreviations 11

3 Test Suite Structure (TSS) 12

3.1 Overview 12
3.2 Test Strategy 12
3.2.1 Server testing configuration 13
3.2.2 Client testing configuration 13
3.3 Test Library and Test Databases 14
3.3.1 Test Database Library 14
3.3.2 Test Database Requirements 14
3.4 Test groups 15
3.5 Attribute Protocol testing 15
3.6 Enhanced Attribute Protocol testing 15

4 Test cases (TC) 16

4.1 Introduction 16
4.1.1 Test case identification conventions 16
4.1.2 Conformance 16
4.1.3 Pass/Fail verdict conventions 17
4.1.4 Notes regarding naming conventions 17
4.2 Setup preambles 17
4.2.1 ATT and EATT Bearers 17
4.2.2 Characteristic Configuration 18
4.2.3 Client Supported Features Configuration 19
4.2.4 Encryption Key Size 20
4.2.5 Exchange MTU 20
4.2.6 Enable Robust Caching – IUT as server 21
4.3 Common Packet Contents 21
4.3.1 Fields and Bits Reserved for Future Use 21
4.4 Server configuration 21
GATT/CL/GAC/BV-01-C [Server Configuration – by Client] 21
GATT/SR/GAC/BV-01-C [Server Configuration – of Server] 23
4.4.1 Server Configuration – of Server 24
GATT/SR/GAC/BI-01-C 24
GATT/SR/GAC/BI-02-C 24
GATT/SR/GAC/BI-03-C 24
4.5 Discovery 25
4.5.1 Discovery Using GATT – by Client 25
GATT/CL/GAD/BV-01-C [Discover All Primary Services – by Client] 26
GATT/CL/GAD/BV-02-C [Discover Primary Service by Service UUID – by Client] 26
GATT/CL/GAD/BV-04-C [Discover All Characteristics of a Service – by Client] 26
GATT/CL/GAD/BV-05-C [Discover Characteristics by UUID – by Client] 26
GATT/CL/GAD/BV-06-C [Discover All Characteristic Descriptors – by Client] 26
4.5.2 Discovery Using GATT – from Server 29

GATT/SR/GAD/BV-01-C [Discover All Primary Services – from Server] 30
GATT/SR/GAD/BV-02-C [Discover Primary Service by Service UUID – from Server] 30
GATT/SR/GAD/BV-03-C [Find Included Services – from Server] 30
GATT/SR/GAD/BV-04-C [Discover All Characteristics of a Service – from Server] 30
GATT/SR/GAD/BV-05-C [Discover Characteristics by UUID – from Server] 30
GATT/SR/GAD/BV-06-C [Discover All Characteristic Descriptors – from Server] 30
GATT/CL/GAD/BV-03-C [Find Included Services – by Client] 32
4.5.3 Discover Services Using SDP – by Client 35
GATT/CL/GAD/BV-07-C [Discover Primary Services Using SDP – by Client] 35
GATT/CL/GAD/BV-08-C [Discover Services by UUID Using SDP – by Client] 35
GATT/SR/GAD/BV-07-C [Discover Primary Services using SDP – from Server] 38
GATT/SR/GAD/BV-08-C [Discover Services by UUID using SDP - from Server] 40
4.6 Read 43
4.6.1 Read Characteristic – by Client 43
GATT/CL/GAR/BV-01-C [Read Characteristic Value – by Client] 44
GATT/CL/GAR/BV-06-C [Read Characteristic Descriptor – by Client] 44
4.6.2 Read Characteristic Value Rejected – by Client 44
GATT/CL/GAR/BI-01-C [Read Characteristic Value – Invalid Handle] 45
GATT/CL/GAR/BI-02-C [Read Characteristic Value – Read Not Permitted] 45
GATT/CL/GAR/BI-03-C [Read Characteristic Value – Insufficient Authorization] 45
GATT/CL/GAR/BI-04-C [Read Characteristic Value – Insufficient Authentication] 45
GATT/CL/GAR/BI-05-C [Read Characteristic Value – Insufficient Encryption Key Size] 45
4.6.3 Read Characteristic – from Server 46
GATT/SR/GAR/BV-01-C [Read Characteristic Value - from Server] 47
GATT/SR/GAR/BV-06-C [Read Characteristic Descriptor – from Server] 47
4.6.4 Read Characteristic Value – from Server 47
GATT/SR/GAR/BI-01-C [Read Characteristic Value – Read Not Permitted Response] 48
GATT/SR/GAR/BI-02-C [Read Characteristic Value – Invalid Handle Response] 48
GATT/SR/GAR/BI-03-C [Read Characteristic Value – Insufficient Authorization] 48
GATT/SR/GAR/BI-04-C [Read Characteristic Value – Insufficient Authentication] 48
GATT/SR/GAR/BI-05-C [Read Characteristic Value – Insufficient Encryption Key Size] 48
GATT/CL/GAR/BV-03-C [Read Using Characteristic UUID – by Client] 49
4.6.5 Read Using Characteristic UUID Rejected – by Client 50
GATT/CL/GAR/BI-06-C [Read Using Characteristic UUID – Read Not Permitted] 51
GATT/CL/GAR/BI-07-C [Read Using Characteristic UUID – Attribute Not Found] 51
GATT/CL/GAR/BI-09-C [Read Using Characteristic UUID – Insufficient Authorization] 51
GATT/CL/GAR/BI-10-C [Read Using Characteristic UUID – Insufficient Authentication] 51
GATT/CL/GAR/BI-11-C [Read Using Characteristic UUID – Insufficient Encryption Key Size] 51
GATT/SR/GAR/BV-03-C [Read Using Characteristic UUID – from Server] 52
4.6.6 Rejecting Read Using Characteristic UUID – from Server 53
GATT/SR/GAR/BI-06-C [Read Characteristic by UUID – Read Not Permitted Response] 54
GATT/SR/GAR/BI-07-C [Read Characteristic by UUID – Attribute Not Found Response] 54
GATT/SR/GAR/BI-08-C [Read Characteristic by UUID – Invalid Handle Response] 54
GATT/SR/GAR/BI-09-C [Read Using Characteristic UUID – Insufficient Authorization] 54
GATT/SR/GAR/BI-10-C [Read Using Characteristic UUID – Insufficient Authentication] 54
GATT/SR/GAR/BI-11-C [Read Using Characteristic UUID – Insufficient Encryption Key Size] 54
4.6.7 Read Long Characteristic – by Client 56
GATT/CL/GAR/BV-04-C [Read Long Characteristic Value – by Client] 56
GATT/CL/GAR/BV-07-C [Read Long Characteristic Descriptor – by Client] 56
4.6.8 Read Long Characteristic Value – by Client 61
GATT/CL/GAR/BI-12-C [Read Long Characteristic Value – Read Not Permitted] 61
GATT/CL/GAR/BI-13-C [Read Long Characteristic Value – Invalid Offset] 61
GATT/CL/GAR/BI-14-C [Read Long Characteristic Value – Invalid Handle] 61
GATT/CL/GAR/BI-15-C [Read Long Characteristic Value – Insufficient Authorization] 61
GATT/CL/GAR/BI-16-C [Read Long Characteristic Value – Insufficient Authentication] 61

GATT/CL/GAR/BI-17-C [Read Long Characteristic Value – Insufficient Encryption Key Size] 61
4.6.9 Read Long Characteristic – from Server 63
GATT/SR/GAR/BV-04-C [Read Long Characteristic Value – from Server] 63
GATT/SR/GAR/BV-07-C [Read Long Characteristic Descriptor – from Server] 63
4.6.10 Read Long Characteristic Value – from Server 65
GATT/SR/GAR/BI-12-C [Read Long Characteristic Value – Read Not Permitted Response] 65
GATT/SR/GAR/BI-13-C [Read Long Characteristic Value – Invalid Offset Response] 65
GATT/SR/GAR/BI-14-C [Read Long Characteristic Value – Invalid Handle Response] 65
GATT/SR/GAR/BI-15-C [Read Long Characteristic Value – Insufficient Authorization] 65
GATT/SR/GAR/BI-16-C [Read Long Characteristic Value – Insufficient Authentication] 65
GATT/SR/GAR/BI-17-C [Read Long Characteristic Value – Insufficient Encryption Key Size] 65
GATT/CL/GAR/BV-05-C [Read Multiple Characteristic Values – by Client] 66
4.6.11 Read Multiple Characteristic Values Rejected – by Client 67
GATT/CL/GAR/BI-18-C [Read Multiple Characteristic Values – Read Not Permitted] 68
GATT/CL/GAR/BI-19-C [Read Multiple Characteristic Values – Invalid Handle] 68
GATT/CL/GAR/BI-20-C [Read Multiple Characteristic Values – Insufficient Authorization] 68
GATT/CL/GAR/BI-21-C [Read Multiple Characteristic Values – Insufficient Authentication] 68
GATT/CL/GAR/BI-22-C [Read Multiple Characteristic Values – Insufficient Encryption Key Size] 68
GATT/SR/GAR/BV-05-C [Read Multiple Characteristic Values – from Server] 69
4.6.12 Rejecting Read Multiple Characteristic Values – from Server 70
GATT/SR/GAR/BI-18-C [Read Multiple Characteristic Values – Read Not Permitted] 70
GATT/SR/GAR/BI-19-C [Read Multiple Characteristic Values – Invalid Handle] 70
GATT/SR/GAR/BI-20-C [Read Multiple Characteristic Values – Insufficient Authorization] 70
GATT/SR/GAR/BI-21-C [Read Multiple Characteristic Values – Insufficient Authentication] 70
GATT/SR/GAR/BI-22-C [Read Multiple Characteristic Values – Insufficient Encryption Key Size] 71
4.6.13 Read Characteristic Value – Invalid Transport Access – by Client 71
GATT/CL/GAR/BI-34-C [Read Characteristic Value – Invalid Transport Access over BR/EDR] 72
GATT/CL/GAR/BI-35-C [Read Characteristic Value – Invalid Transport Access over LE] 72
GATT/SR/GAR/BV-08-C [Read Behind Long Characteristic Descriptor – from Server] 73
4.6.14 Read Characteristic Value – Invalid Transport Access – from Server 75
GATT/SR/GAR/BI-34-C [Read Characteristic Value – Invalid Transport Access over LE] 75
GATT/SR/GAR/BI-35-C [Read Characteristic Value – Invalid Transport Access over BR/EDR] 75
GATT/CL/GAR/BV-08-C [Read Multiple Variable Length Characteristic Values – by Client] 76
4.6.15 Read Multiple Variable Length Characteristic Values over multiple bearers – by Client 77
GATT/CL/GAR/BV-10-C 77
GATT/CL/GAR/BV-11-C 77
4.6.16 Read Multiple Variable Length Characteristic Values Rejected – by Client 79
GATT/CL/GAR/BI-36-C [Read Multiple Variable Length Characteristic Values – Read Not Permitted] 79
GATT/CL/GAR/BI-38-C [Read Multiple Variable Length Characteristic Values – Invalid Handle] 79
GATT/CL/GAR/BI-40-C [Read Multiple Variable Length Characteristic Values – Insufficient Authorization] 79
GATT/CL/GAR/BI-42-C [Read Multiple Variable Length Characteristic Values – Insufficient Authentication] 79
GATT/CL/GAR/BI-44-C [Read Multiple Variable Length Characteristic Values – Insufficient Encryption Key Size] 80
GATT/SR/GAR/BV-09-C [Read Multiple Variable Length Characteristic Values – from Server] 80
4.6.17 Read Multiple Variable Length Characteristic Values over multiple bearers – from Server 81
GATT/SR/GAR/BV-11-C 82
GATT/SR/GAR/BV-12-C 82
4.6.18 Rejecting Read Multiple Variable Length Characteristic Values – from Server 83
GATT/SR/GAR/BI-36-C [Read Multiple Variable Length Characteristic Values – Read Not Permitted] 83
GATT/SR/GAR/BI-38-C [Read Multiple Variable Length Characteristic Values – Invalid Handle] 83
GATT/SR/GAR/BI-40-C [Read Multiple Variable Length Characteristic Values – Insufficient Authorization] 83

GATT/SR/GAR/BI-42-C [Read Multiple Variable Length Characteristic Values – Insufficient Authentication] 84
GATT/SR/GAR/BI-44-C [Read Multiple Variable Length Characteristic Values – Insufficient Encryption Key Size] 84
GATT/SR/GAR/BI-45-C [Multiple Read Characteristic Value Requests – from Server] 85
4.7 Write 88
GATT/CL/GAW/BV-01-C [Write without Response – by Client] 88
GATT/SR/GAW/BV-01-C [Write Without Response – to Server] 89
GATT/CL/GAW/BV-02-C [Write without Response with Authentication – by Client] 90
GATT/SR/GAW/BV-02-C [Write without Response with Authentication – to Server] 91
GATT/SR/GAW/BI-01-C [Write without Response with Authentication – Invalid Signature] 92
GATT/CL/GAW/BV-03-C [Write Characteristic Value - by Client] 94
4.7.1 Write Characteristic Value – by Client 95
GATT/CL/GAW/BI-02-C [Write Characteristic Value – Invalid Handle] 96
GATT/CL/GAW/BI-03-C [Write Characteristic Value – Write Not Permitted] 96
GATT/CL/GAW/BI-04-C [Write Characteristic Value – Insufficient Authorization] 96
GATT/CL/GAW/BI-05-C [Write Characteristic Value – Insufficient Authentication] 96
GATT/CL/GAW/BI-06-C [Write Characteristic Value – Insufficient Encryption Key Size] 96
GATT/SR/GAW/BV-03-C [Write Characteristic Value – to Server] 97
4.7.2 Rejecting Write Characteristic Value – to Server 98
GATT/SR/GAW/BI-02-C [Write Characteristic Value – Invalid Handle Response] 98
GATT/SR/GAW/BI-03-C [Write Characteristic Value – Write Not Permitted Response] 98
GATT/SR/GAW/BI-04-C [Write Characteristic Value – Insufficient Authorization] 98
GATT/SR/GAW/BI-05-C [Write Characteristic Value – Insufficient Authentication] 98
GATT/SR/GAW/BI-06-C [Write Characteristic Value – Insufficient Encryption Key Size] 99
4.7.3 Write Long Characteristic – by Client 99
GATT/CL/GAW/BV-05-C [Write Long Characteristic Value – by Client] 100
GATT/CL/GAW/BV-09-C [Write Long Characteristic Descriptors – by Client] 100
4.7.4 Write Long Characteristic Value – by Client 101
GATT/CL/GAW/BI-07-C [Write Long Characteristic Value – Invalid Handle] 102
GATT/CL/GAW/BI-08-C [Write Long Characteristic Value – Write Not Permitted] 102
GATT/CL/GAW/BI-11-C [Write Long Characteristic Value – Insufficient Authorization] 102
GATT/CL/GAW/BI-12-C [Write Long Characteristic Value – Insufficient Authentication] 102
GATT/CL/GAW/BI-13-C [Write Long Characteristic Value – Insufficient Encryption Key Size] 102
GATT/CL/GAW/BI-09-C [Write Long Characteristic Value – Invalid Offset] 103
4.7.5 Write Long Characteristic – to Server 104
GATT/SR/GAW/BV-05-C [Write Long Characteristic Value – to Server] 105
GATT/SR/GAW/BV-09-C [Write Long Characteristic Descriptors – to Server] 105
4.7.6 Rejecting Write Long Characteristic Value – to Server 106
GATT/SR/GAW/BI-07-C [Write Long Characteristic Value – Invalid Handle Response] 106
GATT/SR/GAW/BI-08-C [Write Long Characteristic Value – Write Not Permitted Response] 106
GATT/SR/GAW/BI-11-C [Write Long Characteristic Value – Insufficient Authorization] 107
GATT/SR/GAW/BI-12-C [Write Long Characteristic Value – Insufficient Authentication] 107
GATT/SR/GAW/BI-13-C [Write Long Characteristic Value – Insufficient Encryption Key Size] 107
GATT/SR/GAW/BI-09-C [Write Long Characteristic Value – Invalid Offset Response] 108
GATT/CL/GAW/BV-06-C [Characteristic Value Reliable Write – by Client] 109
GATT/SR/GAW/BV-06-C [Characteristic Value Reliable Writes - to Server] 110
GATT/SR/GAW/BV-10-C [Nested Long Characteristic Value Reliable Writes – to Server] 112
GATT/SR/GAW/BV-11-C [Characteristic Value Reliable Writes – No Pending Prepared Write Requests] 114
GATT/SR/GAW/BV-07-C [Cancel Reliable Write Characteristic – from Server] 115
GATT/CL/GAW/BV-08-C [Write Characteristic Descriptor – by Client] 117
GATT/SR/GAW/BV-08-C [Write Characteristic Descriptor – from Server] 118
GATT/CL/GAW/BI-32-C [Cancel Reliable Write Characteristic – by Client] 119
GATT/SR/GAW/BI-32-C [Write Characteristic Value – Attribute Value Length Too Long] 120
GATT/SR/GAW/BI-33-C [Write Long Characteristic Value – Attribute Value Length Too Long] 121
4.7.7 Write Characteristic Value – Attribute Value Length Too Long 123

GATT/SR/GAW/BI-39-C [Write Characteristic Value – Attribute Value Length Too Long] 123
GATT/SR/GAW/BI-40-C [Write Characteristic Value – Attribute Value Length Too Long, signed] 123
4.7.8 Multiple prepare writes over multiple bearers 124
GATT/SR/GAW/BV-12-C [Multiple prepare writes over multiple bearers] 125
GATT/SR/GAW/BV-13-C [Multiple prepare writes over multiple bearers – cancel all writes] 125
GATT/SR/GAW/BV-14-C [Multiple prepare writes over multiple bearers – fallback to remaining bearers] 126
4.7.9 Signed Write Without Response – to Server 128
GATT/SR/GAW/BI-36-C 128
GATT/SR/GAW/BI-37-C 128
GATT/SR/GAW/BI-38-C 128
GATT/SR/GAW/BI-41-C [Write Long Characteristic Value – Database Out of Sync] 129
4.8 Notification and Indication 130
GATT/CL/GAN/BV-01-C [Characteristic Value Notification - to Client] 130
4.8.1 Characteristic Value Notification – by Server 132
GATT/SR/GAN/BV-01-C [Characteristic Value Notification – by Server, no bonding] 132
GATT/SR/GAN/BV-03-C [Characteristic Value Notification – by Server, bonding] 132
4.8.2 Characteristic Value Indication – by Server 134
GATT/SR/GAI/BV-01-C [Characteristic Value Indication – by Server, no bonding] 134
GATT/SR/GAI/BV-02-C [Characteristic Value Indication – by Server, bonding] 134
GATT/CL/GAI/BV-01-C [Confirm Characteristic Value Indication – by Client] 136
GATT/CL/GAN/BV-02-C [Handle Value Multiple Notification – to Client] 137
GATT/SR/GAN/BV-02-C [Handle Value Multiple Notification – by Server] 138
GATT/CL/GAI/BI-01-C [Multiple Characteristic Value Indication Requests, Client] 140
4.9 Generic Attribute Profile Services 142
GATT/CL/GAS/BV-01-C [Service Changed Characteristic – to Client] 142
GATT/CL/GAS/BV-02-C [Reading the Database Hash Characteristic] 143
GATT/CL/GAS/BV-03-C [Enabling the Robust Caching] 144
GATT/SR/GAS/BV-01-C [Service Changed Characteristic and Indication – from Server] 145
GATT/SR/GAS/BV-02-C [Computing and Returning the Database Hash Characteristic] 147
GATT/SR/GAS/BV-03-C [Maintaining a Client Supported Features Characteristic Instance for each Client] 148
GATT/SR/GAS/BV-04-C [Maintaining Client Supported Features Characteristic Values for Bonded Devices] 150
GATT/SR/GAS/BV-05-C [Handling Client Requests on Unsynchronized Database] 151
GATT/SR/GAS/BV-06-C [Handling Client Requests after a Hash Read or Service Changed Indication – Database Changed during Connection] 155
GATT/SR/GAS/BV-07-C [Handling Client Requests after a Hash Read or Service Changed Indication – Database Changed between Connections] 157
GATT/SR/GAS/BV-08-C [Handling Read Multiple Variable Length Requests on Unsynchronized Database] 160
4.9.1 Enabling the Features in Client Supported Features 162
GATT/CL/GAS/BV-04-C 163
GATT/CL/GAS/BV-05-C 163
4.10 GATT Transaction Timeouts 163
4.10.1 Read Characteristic Value – Timeouts 163
GATT/CL/GAT/BV-01-C [Read Characteristic Value – Server Timeout] 164
GATT/CL/GAT/BV-02-C [Write Characteristic Value – Server Timeout] 164
GATT/SR/GAT/BV-01-C [Handle Value Indication – Client Timeout] 164
GATT/CL/GAT/BV-03-C [Read Multiple Variable Length Characteristic Values – Server Timeout] 164
4.11 Generic Profile Attributes 165
GATT/CL/GPA/BV-12-C [Characteristic Format Descriptors – from Client] 165
GATT/SR/GPA/BV-12-C [Characteristic Presentation Format Descriptors – from Server] 168
GATT/CL/GPA/BV-11-C [Characteristic Aggregate Format – by Client] 170
GATT/SR/GPA/BV-11-C [Characteristic Aggregate Format – by Server] 172

4.12 Multiple ATT Bearer Support 174
4.12.1 Client Characteristic Configuration Descriptor per ATT Client 174
GATT/SR/GPM/BV-01-C 175
GATT/SR/GPM/BV-02-C 175
GATT/SR/GPM/BV-03-C 175
GATT/SR/GPM/BV-04-C 175
GATT/SR/GPM/BV-05-C 175
GATT/SR/GPM/BV-06-C 175
GATT/SR/GPM/BV-13-C 175
4.12.2 Multiple Client Read Requests on Unsynchronized Database with Robust Caching 176
GATT/CL/GPM/BV-07-C 177
GATT/CL/GPM/BV-08-C 177
GATT/CL/GPM/BV-09-C 177
GATT/CL/GPM/BV-10-C 177
GATT/CL/GPM/BV-11-C 177
GATT/CL/GPM/BV-12-C 177
4.13 Unsupported Requests and Commands 179
GATT/SR/UNS/BI-01-C [Unsupported ATT Requests on Server] 179
GATT/SR/UNS/BI-02-C [Unsupported ATT Commands on Server, Core v6.2 or earlier] 181
GATT/SR/UNS/BI-03-C [Unsupported ATT Commands on Server, Core v6.3 or later] 181
4.14 Security Error 182
4.14.1 ATT PDU – MIC length too short – from Server 182
GATT/SR/GAD/BI-01-C [ATT PDU – MIC length too short – from Server, ATT_READ_BY_TYPE_REQ] 182
GATT/SR/GAR/BI-46-C [ATT PDU – MIC length too short – from Server, ATT_READ_REQ] 182
GATT/SR/GAR/BI-47-C [ATT PDU – MIC length too short – from Server, ATT_READ_BLOB_REQ] 182
GATT/SR/GAR/BI-48-C [ATT PDU – MIC length too short – from Server, ATT_READ_MULTIPLE_REQ] 182
GATT/SR/GAR/BI-49-C [ATT PDU – MIC length too short – from Server, ATT_READ_MULTIPLE_VARIABLE_REQ] 182
GATT/SR/GAW/BI-42-C [ATT PDU – MIC length too short – from Server, ATT_WRITE_REQ] 182
GATT/SR/GAW/BI-43-C [ATT PDU – MIC length too short – from Server, ATT_PREPARE_WRITE_REQ] 182
GATT/SR/GAR/BI-50-C [ATT PDU – MIC length too short – from Server, ATT_READ_BY_GROUP_TYPE_REQ] 182
5 Test case mapping 184
6 Annex: Generic GATT Integrated Tests (GGIT) 193
6.1 Identification conventions 193
6.2 GGIT input tables 193
6.2.1 Input table for SER-, CHA-, and DES-tests 194
6.2.2 Input table for common Control Point procedures (CP-, ICP-, and NCP-tests) 198
6.2.3 Input table for Indication Supported Features Characteristic procedures (ISFC-tests) 198
6.2.4 Input table for Invalid Characteristic or Descriptor Write (ICDW-tests) 199
6.2.5 Example usages 200
6.3 Server test procedures (SGGIT) 201
6.3.1 SGGIT/SER [Service GGIT] 202
6.3.2 SGGIT/CHA [Characteristic GGIT] 203
6.3.3 SGGIT/DES [Descriptor GGIT] 204
6.3.4 SGGIT/CP [Control Point] 204
6.3.5 SGGIT/ICP [Indication Control Point] 205
6.3.6 SGGIT/NCP [Notification Control Point] 205
6.3.7 SGGIT/SDP [Validate SDP Record] 206
6.3.8 SGGIT/SDPNF [SDP Record Not Found] 207

6.3.9 SGGIT/ISFC [Indication Supported Features Characteristic] 207
6.3.10 SGGIT/ICDW [Invalid Characteristic or Descriptor Write] 208
6.4 Client test procedures (CGGIT) 208
6.4.1 CGGIT/SER [Service GGIT] 209
6.4.2 CGGIT/CHA [Characteristic GGIT] 210
6.4.3 CGGIT/DES [Descriptor GGIT] 211
6.4.4 CGGIT/ISFC [Indication Supported Features Characteristic] 211
7 Revision history and acknowledgments 213

1 Scope

This Bluetooth document contains the Test Suite Structure (TSS) and test cases to test the implementation of the Bluetooth Generic Attribute Profile (GATT) Specification, and to verify the implementation of the Bluetooth Attribute Protocol (ATT) Specification, with the objective to provide a high probability of air interface interoperability between the tested implementation and other manufacturers' Bluetooth devices.

2 References, definitions, and abbreviations

2.1 References

This document incorporates provisions from other publications by dated or undated reference. These references are cited at the appropriate places in the text, and the publications are listed hereinafter. Additional definitions and abbreviations can be found in [1] and [2].

[1] Bluetooth Core Specification, Version 4.0 or later, Volume 3, Part G, Generic Attribute Profile (GATT)

[2] Test Strategy and Terminology Overview

[3] ICS Proforma for Generic Attribute Profile (GATT)

[4] Bluetooth Assigned Numbers Document

[5] Bluetooth Core Specification, Version 4.0 or later, Volume 3, Part F, Attribute Protocol (ATT)

[6] Bluetooth Test Suite for Security Manager (SM)

[7] ICS Proforma for Attribute Protocol (ATT)

[8] Bluetooth Core Specification, Version 4.0 or later, Volume 3, Part H, Security Manager (SM)

[9] IXIT Proforma for Bluetooth Conformance Test Suites

[10] Bluetooth Core Specification, Version 5.1 or later, Volume 3, Part G, Generic Attribute Profile (GATT)

[11] Bluetooth Core Specification, Version 5.2 or later, Volume 3, Part G, Generic Attribute Profile (GATT)

[12] Bluetooth Core Specification, Version 5.2 or later, Volume 3, Part F, Attribute Protocol (ATT)

[13] Bluetooth Test Suite for Link Manager Protocol (LMP)

[14] Bluetooth Core Specification, Version 5.3 or later, Volume 3, Part F, Attribute Protocol (ATT)

[15] Bluetooth Core Specification, Version 6.1 or later, Volume 3, Part F, Attribute Protocol (ATT)

[16] Bluetooth Core Specification, Version 7.0 or later, Volume 3, Part A, Logical Link Control and Adaptation Protocol (L2CAP)

2.2 Definitions

In this Bluetooth document, the definitions from [1] and [2] apply.

2.3 Acronyms and abbreviations

In this Bluetooth document, the definitions, acronyms, and abbreviations from [1] and [2] apply.

3 Test Suite Structure (TSS)

3.1 Overview

The Generic Attribute Profile (GATT) requires the presence of the Attribute Protocol (ATT), the Generic Access Protocol (GAP), and the Logical Link Control and Adaptation Protocol (L2CAP). This is illustrated in Figure 3.1.

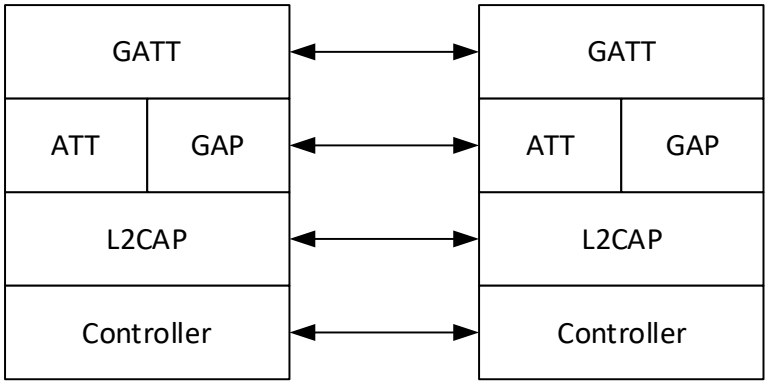


Figure 3.1: Generic Attribute Profile test model

In Figure 3.1, the implementation of GATT provided by the IUT may support only GATT features as required by the GATT profile without an implementation of a GATT-based profile or service. In any case, the IUT is expected to provide a way to exercise the GATT Profile functionality in this Test Suite.

3.2 Test Strategy

The test objectives are to verify the functionality of the Generic Attribute Profile within a Bluetooth Host and enable interoperability between Bluetooth Hosts on different devices. The testing approach covers mandatory and optional requirements in the specification and matches these to the support of the IUT as described in the ICS. Any defined test herein is applicable to the IUT if the ICS logical expression defined in the Test Case Mapping Table (TCMT) evaluates to true.

The test equipment provides an implementation of the Radio Controller and the parts of the Host needed to perform the test cases defined in this Test Suite. A Lower Tester acts as the IUT's peer device and interacts with the IUT over-the-air interface. The configuration, including the IUT, needs to implement similar capabilities to communicate with the test equipment. For some test cases, it is necessary to stimulate the IUT from an Upper Tester. In practice, this could be implemented as a special test interface, a Man Machine Interface (MMI), or another interface supported by the IUT.

This Test Suite contains Valid Behavior (BV) tests complemented with Invalid Behavior (BI) tests where required. The test coverage mirrored in the Test Suite Structure is the result of a process that started with catalogued specification requirements that were logically grouped and assessed for testability enabling coverage in defined test purposes.

When the Generic Attribute Profile is supported over both BR/EDR and LE, the applicable test cases are executed once for each transport, unless the test case applies to only one of the two transports.

The Test Suite Structure is a tree:

1. Profile operations:
    - Discover Characteristics
    - Reading a Characteristic

- Writing a Characteristic
- Notification of Characteristics
- Indicating a Characteristic, with Confirmation

2. Use of protocols:
   - Attribute Protocol
3. Generic Profile Attributes:
   - Characteristic Formats

3.2.1 Server testing configuration

The following configuration is recommended for testing server IUT:

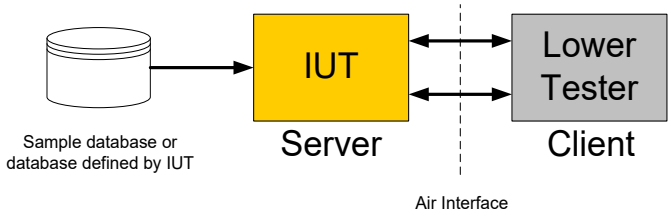


Figure 3.2: Generic Attribute Profile Server test configuration

The sample database of Generic Profile Attributes (services, characteristics, and descriptors) used by the IUT may be specified for use in testing.

3.2.2 Client testing configuration

The following configuration is recommended for testing client IUT:

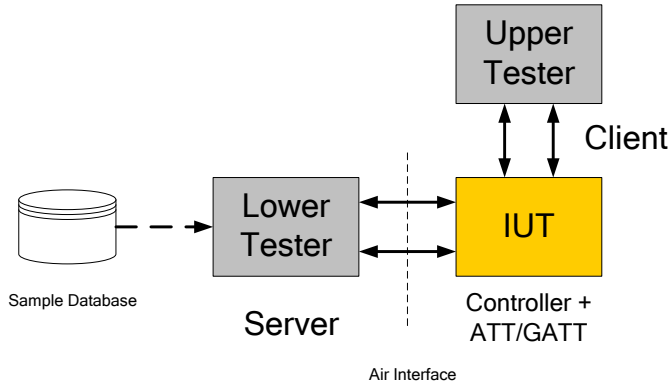


Figure 3.3: Generic Attribute Profile Client test configuration

The sample database of Generic Profile Attributes (services, characteristics and descriptors) used by the Lower Tester is specified in Section 3.3. In tests of Discovery (Section 4.5) four or more distinct Sample Databases are used, derived from the Library of valid GATT database elements for Compliance (-C) testing as defined in Section 3.3.

The interface between the IUT and the Upper Tester may be:

- A man-machine interface
- Provided by the IUT manufacturer e.g., a wired connection, an API, etc.

3.3 Test Library and Test Databases

Tests of GATT clients use four or more sample databases derived from a Library.

3.3.1 Test Database Library

A Library of valid GATT database elements is assembled. These database elements include services, characteristics, and characteristic descriptors. This Library includes features required and optional in GATT servers:

1. At least 10 complex Services
2. Multiple included Services
3. Multiple included Characteristics
4. Complex Characteristics with multiple descriptors: name, properties, format, units
5. Variety of formats (Table 3-16/[1])
6. Variety of properties (3.3.1.1/[1])
7. Aggregate characteristics (3.3.3.6/[1])

This Library will be updated for two events:

1. Add services and characteristics included in Adopted GATT-based profiles.
2. Add services and characteristics included in Qualified GATT servers.

3.3.2 Test Database Requirements

The following requirements apply to the set of databases used for testing:

1. One small test database whose services fit into a single minimum sized PDU, with only 16-bit UUIDs.
2. A set of three or more larger test databases, with 16-bit and 128-bit service UUIDs AND characteristic UUIDs in pseudo-random order. In one, the 16-bit ones are early and 128-bit ones are late; in one, that is reversed. In the third, they are completely random.
3. At least one of those has a Primary Service at the MAX handle (0xFFFF).
4. At least one primary service without any «Include» or «Characteristic» declarations which is not located at MAX handle (0xFFFF).
5. At least one of those has a Characteristic at the MAX handle (0xFFFF).
6. At least one of those has a Secondary Service.
7. Each has at least one each of 16-bit and 128-bit Primary Service UUID with multiple instances (the IOP database does); in the latter case, there should be more than enough for the found UUID/handle pairs to exceed the minimum ATT_MTU and overflow into multiple PDU.
8. All have some services that are simple, and some that include other services.
9. Each has at least one instance where the handle of an included service is before the handle of the including service.
10. At least one with one or more services that contain Included Services with both 16-bit and 128-bit Service UUIDs.
11. Each has instances of simple characteristics (no descriptors) and complex characteristics (multiple descriptors)
12. Each has instances of complex characteristics with 16-bit and 128-bit characteristic descriptor UUIDs, and these can be in scrambled order.
13. For any GATT client IUT whose ICS indicates support for a GATT-based Service, any test databases which are larger (see item 2 above) contain at least one instantiation of each GATT-based Service supported.

14. For any instantiation of a GATT-based Service defined by the Bluetooth SIG in a large test database (see item 2 above), the database contains at least two additional characteristics; the UUID for these characteristics is chosen randomly from 16-bit values not yet defined in Assigned Numbers:
    a) An additional characteristic whose handle is between the defined mandatory characteristics and any defined optional characteristics.
    b) An additional characteristic whose handle is after any defined optional characteristic.
15. For any instantiation of a GATT-based Service defined by the Bluetooth SIG in a large test database (see item 2 above), the database contains at least two additional characteristic descriptors; the UUID for these characteristic descriptors is chosen randomly from 16-bit values not yet defined in Assigned Numbers:
    a) An additional characteristic descriptor added to a defined mandatory characteristic.
    b) An additional characteristic descriptor added to an optional characteristic.

3.4 Test groups

The following test groups have been defined:

- Server Configuration
- Discover Services and Characteristics
- Read Characteristic Values and Characteristic Descriptors
- Write Characteristic Values and Characteristic Descriptors
- Notify or Indicate Characteristic Values
- Generic Attribute Profile Services
- GATT Timeouts
- Generic Profile Attributes

3.5 Attribute Protocol testing

The Generic Attribute Profile can be used to test the Attribute Protocol. ATT requires use of GATT over BR/EDR or LE transports. When testing ATT, GATT is required as part of the Upper Tester. After analysis it was demonstrated that all features listed in the Attribute Protocol ICS can be tested using Test Cases in this Test Suite. In consideration of this, each test case in this specification contains references to both ATT and GATT.

3.6 Enhanced Attribute Protocol testing

The Generic Attribute Profile can be used to test the Enhanced Attribute Protocol. EATT requires use of GATT over BR/EDR or LE transports. When testing EATT, GATT is required as part of the Upper Tester. After analysis, it was demonstrated that all features listed in the Attribute Protocol ICS can be tested using Test Cases in this Test Suite. In consideration of this, test cases pertaining to the Reading Multiple Variable Length Characteristics Values procedure in this specification contain references to both EATT and GATT.

4 Test cases (TC)

4.1 Introduction

4.1.1 Test case identification conventions

Test cases are assigned unique identifiers per the conventions in [2]. The convention used here is: **<spec abbreviation>/<IUT role>/**<class>/**<feat>**/<func>/<subfunc>/<cap>/**<xx>-<nn>-<y>**.

Identifier Abbreviation	**Spec Identifier <spec abbreviation>**
GATT	Generic Attribute Profile
Identifier Abbreviation	**Role Identifier <IUT role>**
CL	Client Role
SR	Server Role
Identifier Abbreviation	**Class Identifier <class>**
GAC	Generic Attribute Configuration
GAD	Generic Attribute Discovery
GAI	Generic Attribute Indication
GAN	Generic Attribute Notification
GAR	Generic Attribute Read
GAS	Generic Attribute Profile Services
GAT	GATT Transaction Timeouts
GAW	Generic Attribute Write
GPA	Generic Profile Attributes
GPM	Generic Attribute Multiple ATT Bearers
UNS	Unsupported Requests and Commands

Table 4.1: GATT TC feature naming conventions

4.1.2 Conformance

When conformance is claimed for a particular specification, all capabilities are to be supported in the specified manner. The mandated tests from this Test Suite depend on the capabilities to which conformance is claimed.

The Bluetooth Qualification Program may employ tests to verify implementation robustness. The level of implementation robustness that is verified varies from one specification to another and may be revised for cause based on interoperability issues found in the market.

Such tests may verify:

- That claimed capabilities may be used in any order and any number of repetitions not excluded by the specification
- That capabilities enabled by the implementations are sustained over durations expected by the use case
- That the implementation gracefully handles any quantity of data expected by the use case

- That in cases where more than one valid interpretation of the specification exists, the implementation complies with at least one interpretation and gracefully handles other interpretations
- That the implementation is immune to attempted security exploits

A single execution of each of the required tests is required to constitute a Pass verdict. However, it is noted that to provide a foundation for interoperability, it is necessary that a qualified implementation consistently and repeatedly pass any of the applicable tests.

In any case, where a member finds an issue with the test plan generated by the Bluetooth SIG qualification tool, with the test case as described in the Test Suite, or with the test system utilized, the member is required to notify the responsible party via an erratum request such that the issue may be addressed.

4.1.3 Pass/Fail verdict conventions

Each test case has an Expected Outcome section. The IUT is granted the Pass verdict when all the detailed pass criteria conditions within the Expected Outcome section are met.

The convention in this Test Suite is that, unless there is a specific set of fail conditions outlined in the test case, the IUT fails the test case as soon as one of the pass criteria conditions cannot be met. If this occurs, then the outcome of the test is a Fail verdict.

4.1.4 Notes regarding naming conventions

Any reader of this document should be aware that “Notifications” and “Single Notification” may be used interchangeably to refer to the same GATT sub-procedure.

4.2 Setup preambles

The procedures defined in this section are used to achieve specific conditions on the IUT and the test equipment within the tests defined in this document. The preambles here are commonly used to establish initial conditions.

4.2.1 ATT and EATT Bearers

The ICS [3] specifies the supported transports and bearers.

- If BR/EDR is specified in the ICS [3], the setup procedure defined in 4.2.1.1 or 4.2.1.3 is executed.
- If LE is specified in the ICS [3], the setup procedure defined in 4.2.1.2 or 4.2.1.4 is executed.
- If both ATT and EATT are specified in the ICS [3], then the TSPX_bearer_for_bredr IXIT value specifies the bearer procedure to execute for BR/EDR and the TSPX_bearer_for_le IXIT value specifies the bearer procedure to execute for LE.
- If BR/EDR and only EATT are supported, then the EATT setup procedure is executed.
- If only ATT is supported, then the ATT setup procedure is executed.

4.2.1.1 Setup ATT Bearer over BR/EDR

Preamble procedure:

1. Establish a BR/EDR transport connection between the IUT and the Lower Tester.
2. Establish an L2CAP channel (PSM 0x001F) between the IUT and the Lower Tester over that BR/EDR transport.

4.2.1.2 Setup ATT Bearer over LE

Preamble procedure:

1. Establish an LE transport connection between the IUT and the Lower Tester.
2. Establish an L2CAP channel 0x0004 between the IUT and the Lower Tester over that LE transport.

4.2.1.3 Setup EATT Bearer over encrypted BR/EDR connection

Preamble procedure:

1. Establish an encrypted BR/EDR transport connection between the IUT and the Lower Tester.
2. Establish several L2CAP channels (EATT PSM, as defined in Assigned Numbers) between the IUT and the Lower Tester over that BR/EDR transport.

4.2.1.4 Setup EATT Bearer over encrypted LE connection

Preamble procedure:

1. Establish an encrypted LE transport connection between the IUT and the Lower Tester.
2. Establish one or more L2CAP channels (EATT PSM, as defined in Assigned Numbers) between the IUT and the Lower Tester over that LE transport.

4.2.2 Characteristic Configuration

Tests for Characteristic Notification or Characteristic Indication may require characteristic configuration; see [1] Section 3.3.3.3. If required, the Lower Tester begins the test by configuring the server IUT to generate a Notification or an Indication of the selected Characteristic. If the server does not use the Client Characteristic Configuration descriptor then these preambles do not need to be executed.

All client test cases, which use a configuration as show in Figure 3.3, contain test procedure descriptions, Message Sequence Charts and expected results. These, in turn, use example message syntax between the Upper tester and the IUT. Those example messages are generic.

4.2.2.1 Characteristic Configuration for Notification – IUT as Server

Preamble procedure:

The Lower Tester has the necessary security permissions from the IUT to write the Client Characteristic Configuration descriptor.

The Lower Tester sends an ATT_WRITE_REQ to the IUT. The handle selects the Client Characteristic Configuration descriptor. The value is set to 0x0001, to enable Notification.

4.2.2.2 Characteristic Configuration for Indication – IUT as Server

Preamble procedure:

The Lower Tester has the necessary security permissions from the IUT to write the Client Characteristic Configuration descriptor.

The Lower Tester sends an ATT_WRITE_REQ to the IUT. The handle selects the Client Characteristic Configuration descriptor. The value is set to 0x0002, to enable Indication.

4.2.2.3 Characteristic Configuration for Notification – IUT as Client

Preamble procedure:

The IUT has the necessary security permissions from the Lower Tester to write the Client Characteristic Configuration descriptor.

The Upper Tester orders the IUT to send an ATT_WRITE_REQ to the Lower Tester. The handle selects the Client Characteristic Configuration descriptor. The value is set to 0x0001, to enable Notification.

4.2.2.4 Characteristic Configuration for Indication – IUT as Client

Preamble procedure:

The IUT has the necessary security permissions from the Lower Tester to write the Client Characteristic Configuration descriptor.

The Upper Tester orders the IUT to send an ATT_WRITE_REQ to the Lower Tester. The handle selects the Client Characteristic Configuration descriptor. The value is set to 0x0002, to enable Indication.

4.2.3 Client Supported Features Configuration

Tests that rely on the usage of Enhanced ATT bearer must ensure that a server is aware that the client supports the Enhanced ATT bearer feature, for example because the device has checked the peer's Client Supported Features characteristic or its SDP record.

Additionally, tests that rely on the transmission of the Multiple Variable Length Notifications must ensure that a server is aware that the client supports this PDU.

If required, the GATT Client begins the test by informing the GATT Server device of the features supported by the client.

All client test cases, which use a configuration as shown in Figure 3.3, contain test procedure descriptions, Message Sequence Charts, and expected results. These, in turn, use example message syntax between the Upper Tester and the IUT. Those example messages are generic.

4.2.3.1 Characteristic Configuration for Enhanced ATT bearer – IUT as Server

Preamble procedure:

The Lower Tester has the necessary security permissions from the IUT to write the Client Supported Features characteristic.

The Lower Tester sends an ATT_WRITE_REQ to the IUT. The handle selects the Client Supported Features characteristic handle. The value is set to 0x0002, to enable Enhanced ATT bearer.

4.2.3.2 Characteristic Configuration for Enhanced ATT bearer – IUT as Client

Preamble procedure:

The IUT has the necessary security permissions from the Lower Tester to write the Client Supported Features characteristic.

The Upper Tester orders the IUT to send an ATT_WRITE_REQ to the Lower Tester. The handle selects the Client Supported Features characteristic handle. The value is set to 0x0002, to enable Enhanced ATT bearer.

4.2.3.3 Characteristic Configuration for Multiple Handle Value Notifications – IUT as Server

Preamble procedure:

The Lower Tester has the necessary security permissions from the IUT to write the Client Supported Features characteristic.

The Lower Tester sends an ATT_WRITE_REQ to the IUT. The handle selects the Client Supported Features characteristic handle. The value is set to 0x0004, to enable Multiple Handle Value Notifications.

4.2.3.4 Characteristic Configuration for Multiple Handle Value Notifications – IUT as Client

Preamble procedure:

The IUT has the necessary security permissions from the Lower Tester to write the Client Supported Features characteristic.

The Upper Tester orders the IUT to send an ATT_WRITE_REQ to the Lower Tester. The handle selects the Client Supported Features characteristic handle. The value is set to 0x0004, to enable Multiple Handle Value Notifications.

4.2.4 Encryption Key Size

Tests for insufficient encryption key size require an encrypted link with a key size less than the size required by an attribute. The encryption key size requirements of attributes are determined by the associated Profile.

Preamble procedure:

Establish an encrypted link over the LE transport between the IUT and the Lower Tester. For example, see test SM/CEN/EKS/BV-01-C or SM/PER/EKS/BV-02-C in [6] for LE transport, or LMP/ENC/BV-01-C or LMP/ENC/BV-05-C in [13] for BR/EDR transport. The key size is less than the size required by an attribute.

4.2.5 Exchange MTU

- Preamble procedure

  ATT_MTU may be exchanged between IUT and the Lower Tester using the procedure described in the MSC below. The IUT may support either the GATT Client or GATT Server role as applicable to the test case. This preamble can only be initiated once during a connection.

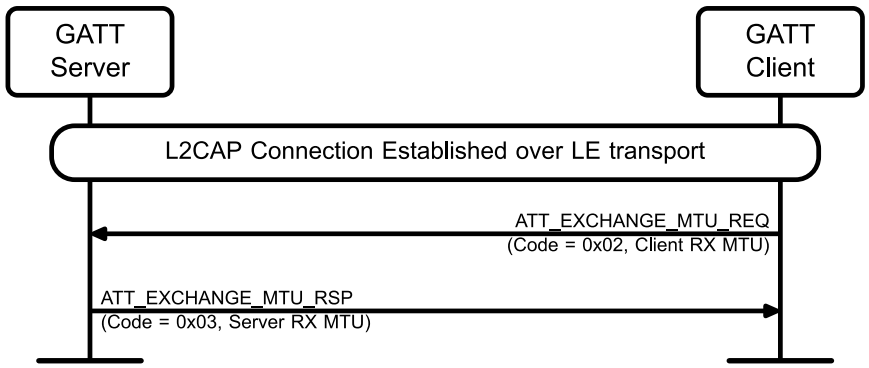


Figure 4.1: Exchange MTU preamble MSC

4.2.6 Enable Robust Caching – IUT as server

- Preamble procedure

  The Lower Tester sends a GATT Characteristic Value Write procedure on the Client Supported Features characteristic, setting the Robust Caching bit to 1 and all RFU bits to 0.

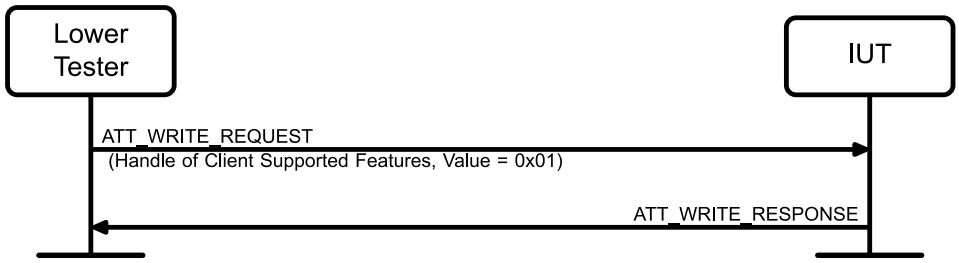


Figure 4.2: Enable Robust Caching – IUT as server MSC

4.3 Common Packet Contents

4.3.1 Fields and Bits Reserved for Future Use

Unless a specific test states otherwise, all fields within packets and all bits within fields that are described as reserved for future use are set to 0 in packets sent by the Upper and Lower Testers.

4.4 Server configuration

Verify Generic Attribute Profile Server Configuration.

GATT/CL/GAC/BV-01-C [Server Configuration – by Client]

- Test Purpose

  Verify that a Generic Attribute Profile client can generate an Exchange MTU Request command to configure ATT_MTU over LE.

- Reference

  [1] 4.3.1

  [5] 3.4.2.1, 3.4.2.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1.2 is used to set up the transport and L2CAP channel over LE.
  - The Lower Tester contains a writeable long characteristic of maximum size (512).

- Test Procedure

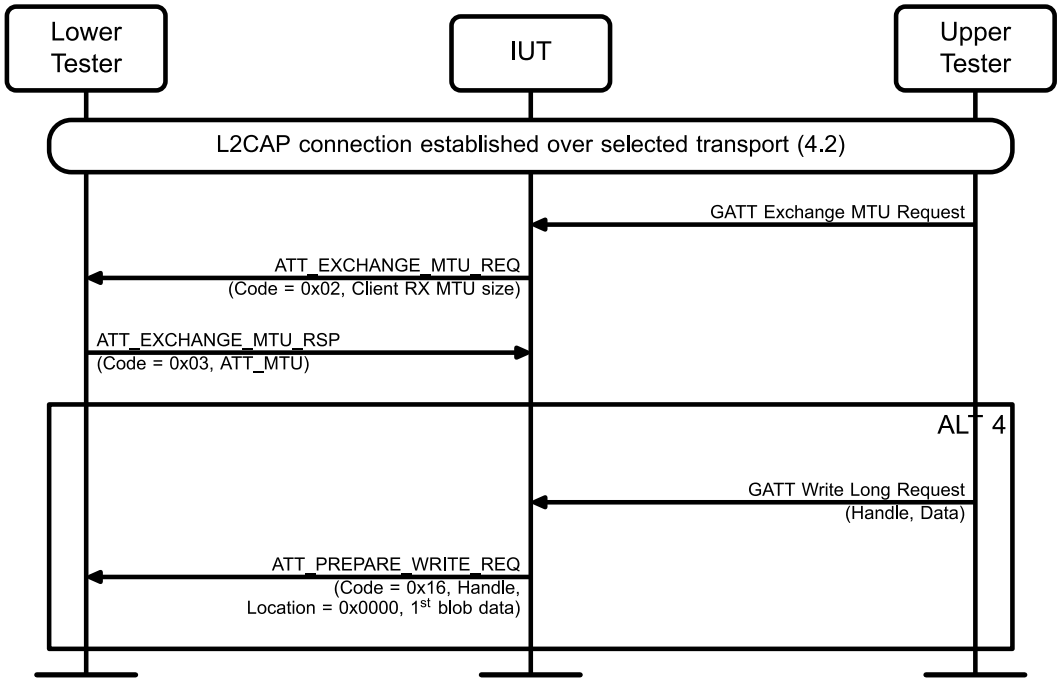


Figure 4.3: GATT/CL/GAC/BV-01-C [Server Configuration – by Client] MSC

1. Send a request from the Upper Tester to the IUT to initiate MTU exchange; this may be of the form GATT_Exchange MTU Request.
2. The Lower Tester waits for an ATT_EXCHANGE_MTU_REQ PDU from the IUT.
3. The Lower Tester sends an ATT_EXCHANGE_MTU_RSP PDU to the IUT containing an ATT_MTU parameter set as specified in [5].
4. Perform alternative 4A if the IUT supports the ATT_PREPARE_WRITE_REQ PDU.
   Alternative 4A (The IUT supports ATT_PREPARE_WRITE_REQ PDU):
   - 4A.1 The Upper Tester sends a request to the IUT to generate a prepare write request to a specified handle in the Lower Tester, providing more data than ATT_MTU.
   - 4A.2 The IUT sends an ATT_PREPARE_WRITE_REQ PDU to the Lower Tester, and the latter checks its size.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends an ATT_EXCHANGE_MTU_REQ PDU command to the Lower Tester with the client RX MTU size.

  The IUT receives an ATT_EXCHANGE_MTU_RSP PDU sent by the Lower Tester and recovers the ATT_MTU value.

  In Step 4A, the IUT sends an ATT_PREPARE_WRITE_REQ PDU with ATT_MTU – 5 of data.

GATT/SR/GAC/BV-01-C [Server Configuration – of Server]

- Test Purpose

  Verify that a Generic Attribute Profile server can accept an Exchange MTU Request and respond with an Exchange MTU Response over LE.

- Reference

  [1] 4.3.1

  [5] 3.4.2.1, 3.4.2.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1.2 is used to set up the transport and L2CAP channel over LE.
  - The IUT has at least one characteristic value that is:
    a) longer than its (MTU – 1) if MTU < 512
    b) 512 if MTU >= 512

- Test Procedure

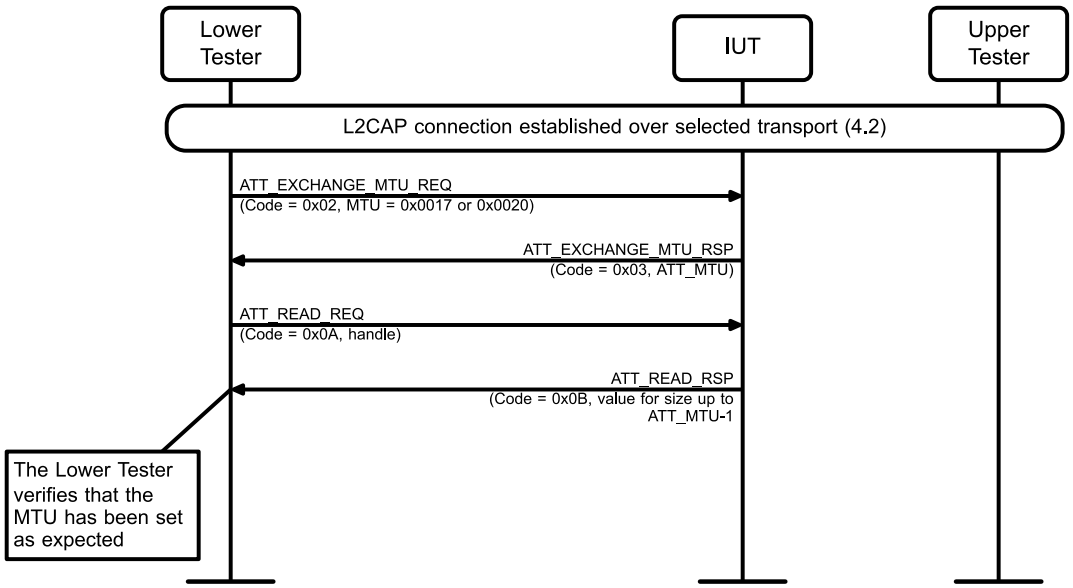


Figure 4.4: GATT/SR/GAC/BV-01-C [Server Configuration – of Server] MSC

Repeat Steps 1–4 for each round shown in Table 4.2:

1. Send an ATT_EXCHANGE_MTU_REQ PDU from the Lower Tester to the IUT to inform the server of the client's maximum Rx MTU size (23 or 512).
2. The Lower Tester waits for an ATT_EXCHANGE_MTU_RSP PDU containing the ATT_MTU parameter.
3. The Lower Tester sends an ATT_READ_REQ PDU to the IUT.
4. The IUT sends an ATT_READ_RSP PDU to the Lower Tester.

Round	Lower Tester ATT_MTU
1	Minimum value (23)
2	512

Table 4.2: Server Configuration – of Server rounds

- Expected Outcome

  Pass verdict

  In Step 2, the ATT_MTU has been set to the minimum of the Client Rx MTU and Server Rx MTU values.

  In Step 4, the IUT responds with an ATT_READ_RSP PDU. The Lower Tester verifies that MTU was exchanged successfully.

4.4.1 Server Configuration – of Server

- Test Purpose

  Verify that using Exchange MTU request is rejected by the server when it is not supported over the established bearer.

- Reference

  [11] 4.2

  [12] 3.2.8, 3.4, 3.4.9

- Initial Condition

  - If EATT is supported, the IUT sets the EATT Supported bit to 1 in the Server Supported Features characteristic.
  - A preamble procedure defined in Section 4.2.1.1, Section 4.2.1.3, or Section 4.2.1.4 is used to set up the transport and L2CAP channel over the relevant bearer.
  - If EATT is supported, a preamble procedure defined in Section 4.2.3.1 is used to inform the IUT that the Lower Tester supports the Enhanced ATT bearer feature.

- Test Case Configuration

Test Case	Transport	Bearer
GATT/SR/GAC/BI-01-C	LE	EATT
GATT/SR/GAC/BI-02-C	BR/EDR	ATT
GATT/SR/GAC/BI-03-C	BR/EDR	EATT

Table 4.3: Server Configuration – of Server test cases

- Test Procedure

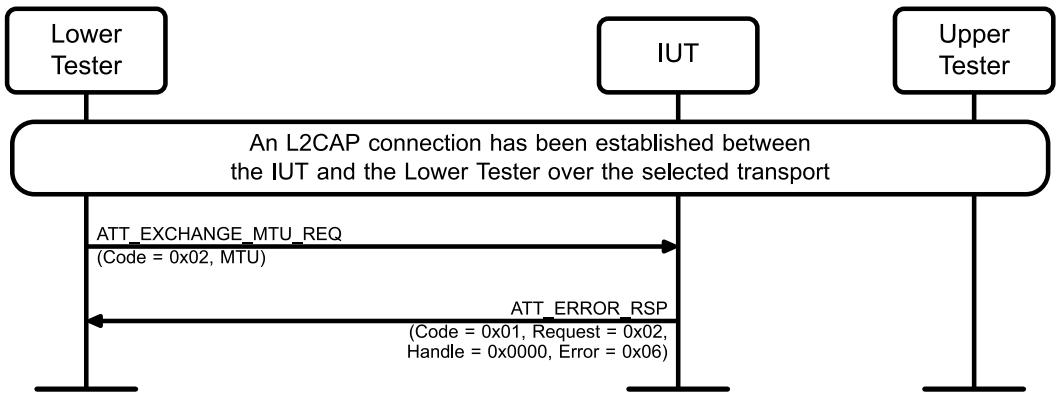


Figure 4.5: Server Configuration – of Server MSC

1. The Lower Tester sends an ATT_EXCHANGE_MTU_REQ PDU (Code = 0x02) to the IUT to inform the server of the client's maximum Rx MTU size (any valid value).
2. The IUT rejects the request and sends an ATT_ERROR_RSP PDU (Code = 0x01) to the Lower Tester, with Error Code = 0x06 (Request Not Supported).

- Expected Outcome

  Pass verdict

  In Step 2, the IUT responds with an ATT_ERROR_RSP PDU, with the Request Opcode In Error field set to the opcode sent by the Lower Tester, the Attribute Handle In Error field set to 0x0000, and the Error Code field set to 0x06 (Request Not Supported).

4.5 Discovery

Verify Generic Attribute Profile Discovery of Services and Service Characteristics.

4.5.1 Discovery Using GATT – by Client

- Test Purpose

  Verify that a Generic Attribute Profile client discovers Services or Characteristics in a GATT server by different means.

- Reference

  [1] 4.1.1

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - The Upper Tester has access to the test database contained in the Lower Tester, so that the Upper Tester can specify the handle range.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - Use distinct Sample Databases derived from the Library defined Section 3.3. Table 4.4 indicates whether at least one of the inquired service handle ranges or characteristic handles contains a mix of 16-bit and 128-bit UUIDs.

- Test Case Configuration

Test Case	Rounds	Upper Tester <-> IUT	Parameters	Mandatory 128-bit UUID	IUT <-> Lower Tester
GATT/CL/GAD/BV-01-C [Discover All Primary Services – by Client]	min. 4	GATT Discover Primary Services (handle/UUID list)	Attribute Group Type = «Primary Service»	No	ATT_READ_BY_GROUP_TYPE_REQ (0x10) ATT_READ_BY_GROUP_TYPE_RSP (0x11)
GATT/CL/GAD/BV-02-C [Discover Primary Service by Service UUID – by Client]	4–8	GATT Discover Service by UUID (handle list)	Attribute Type = «Primary Service», Service UUID	Yes, if supported by the IUT	ATT_FIND_BY_TYPE_VALUE_REQ (0x06) ATT_FIND_BY_TYPE_VALUE_RSP (0x07)
GATT/CL/GAD/BV-04-C [Discover All Characteristics of a Service – by Client]	4	GATT Discover Service Characteristic (Handle/ Characteristic list)	Attribute Type = «Characteristic»	No	ATT_READ_BY_TYPE_REQ (0x08) ATT_READ_BY_TYPE_RSP (0x09)
GATT/CL/GAD/BV-05-C [Discover Characteristics by UUID – by Client]	8	GATT Discover Service Characteristic UUID (Handle/UUID list)	Attribute Type = «Characteristic»	Yes	ATT_READ_BY_TYPE_REQ (0x08) ATT_READ_BY_TYPE_RSP (0x09)
GATT/CL/GAD/BV-06-C [Discover All Characteristic Descriptors – by Client]	4	GATT Discover Descriptors (Handle/UUID list)	Start handle, Ending handle	No	ATT_FIND_INFORMATION_REQ (0x04) ATT_FIND_INFORMATION_RSP (0x05)

Table 4.4: Discovery Using GATT – by Client test cases

- Test Procedure

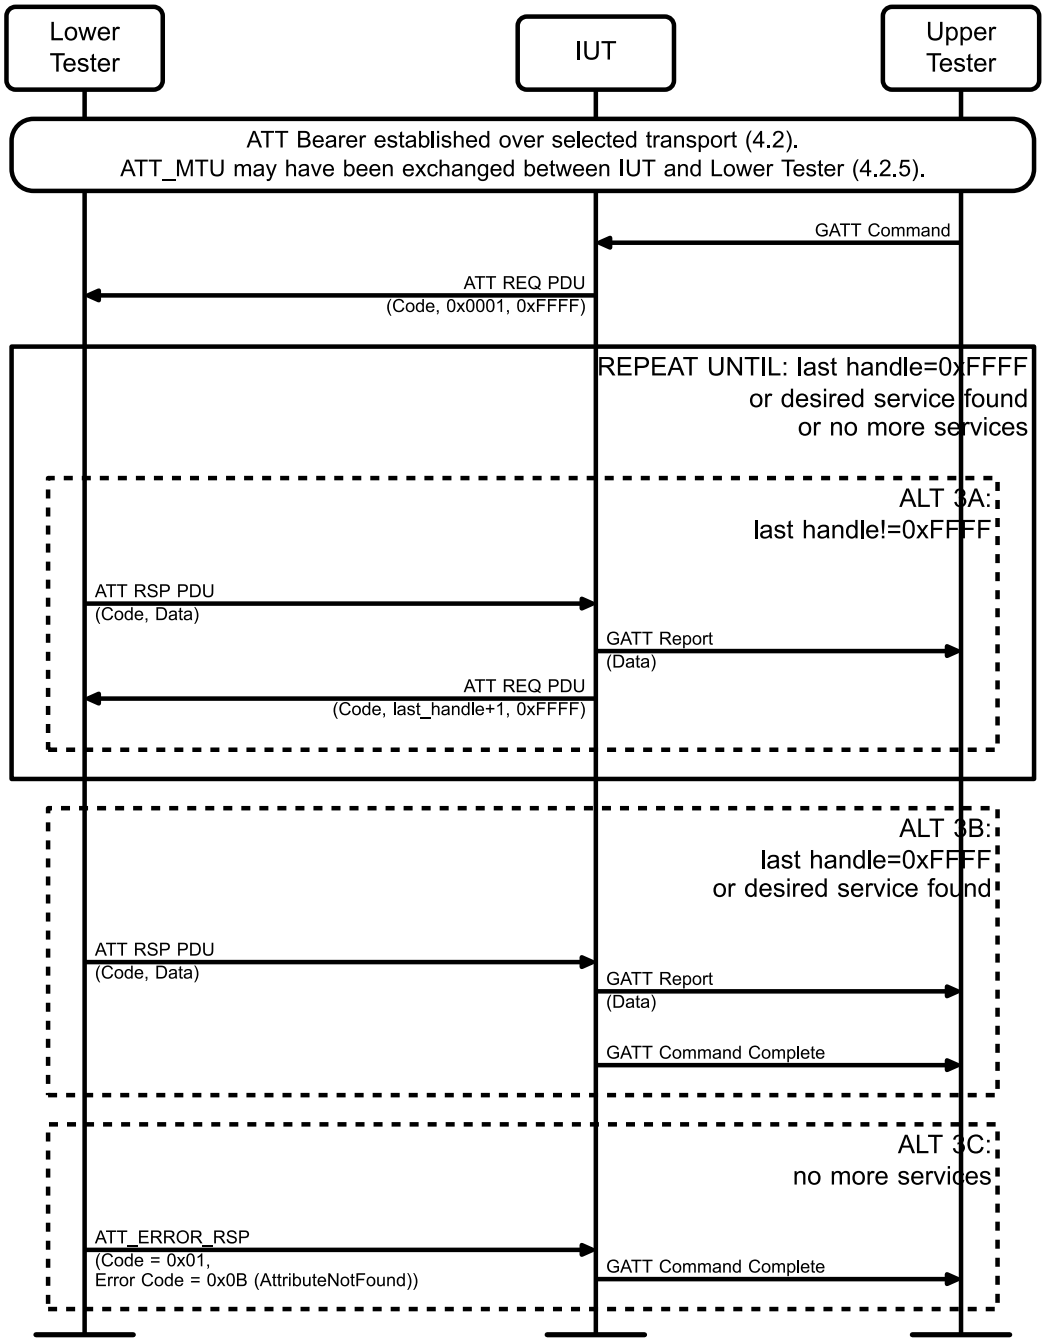


Figure 4.6: Discovery Using GATT – by Client MSC

Repeat Steps 1–3 for the number of rounds indicated in Table 4.4, using four or more distinct Sample Databases derived from the Library defined in Section 3.3:

1. The Upper Tester sends a request to the IUT as indicated in the Upper Tester <-> IUT column in Table 4.4.
2. The IUT sends a REQ PDU as indicated in the IUT <-> Lower Tester column in Table 4.4 to the Lower Tester, with starting handle = 0x0001, ending handle = 0xFFFF, and parameters in the Parameters column.

3. Perform alternative 3A, 3B, or 3C depending on the Lower Tester's response to the REQ PDU in Step 2.

   Alternative 3A (Lower Tester sends a RSP PDU with last handle != 0xFFFF):

   3A.1 Repeat Steps 3A.2–3A.4 until a response with End Group Handle = 0xFFFF is received, a desired service or characteristic is found, or an ATT_ERROR_RSP is received.

   3A.2 The Lower Tester sends a RSP PDU as indicated in the IUT <-> Lower Tester column in Table 4.4, with last handle != 0xFFFF and valid data.

   3A.3 The IUT sends a report to the Upper Tester with the data received from the Lower Tester, e.g., in a message as indicated in the Upper Tester <-> IUT column in Table 4.4.

   3A.4 The IUT sends in all subsequent REQ PDUs with the starting handle set to one greater than the last End Group Handle in the RSP PDU.

   Alternative 3B (Lower Tester sends a RSP PDU with last handle = 0xFFFF OR with the desired service or characteristic):

   3B.1 The Lower Tester sends a RSP PDU as indicated in the IUT <-> Lower Tester column in Table 4.4 with the desired service or with the last handle != 0xFFFF.

   3B.2 The IUT sends a report to the Upper Tester with the data indicated in the IUT <-> Lower Tester column in Table 4.4, sent by the Lower Tester (sets of handle pairs and values), e.g., in a message as indicated in the Upper Tester <-> IUT column in Table 4.4.

   3B.3 The IUT indicates to the Upper Tester a completion message, e.g., GATT Command Complete.

   Alternative 3C (Lower Tester sends ATT_ERROR_RSP, if the attribute is not found in the handle interval):

   3C.1 The Lower Tester sends an ATT_ERROR_RSP PDU with the Error Code = 0x0B (AttributeNotFound).

   3C.2 The IUT indicates to the Upper Tester a completion message, e.g., GATT Command Complete.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends REQ PDUs to the Lower Tester and discovers services in the Lower Tester. The first command has starting handle = 0x0001, ending handle = 0xFFFF, and additional parameters as indicated in the Parameter column in Table 4.4. For any subsequent REQ PDU, the starting handle is set to one greater than the last End Group Handle in the RSP.

  In Step 3, the IUT sends REQ PDUs to the Lower Tester until a response with End Group Handle = 0xFFFF is received, the relevant data is received, or an ATT_ERROR_RSP PDU is received.

  If the IUT discovers characteristics, it will check each returned attribute value for a matching characteristic UUID and report matching characteristic handle/UUID pairs to the Upper Tester.

  At the end of the test, the IUT indicates a completion message. Prior to that completion message, the IUT reports all received data.

- Notes

  Prior to each test performance, the IUT should clear the client's attribute cache. This may be automated by the test equipment, and user interaction may not be required.

4.5.2 Discovery Using GATT – from Server

- Test Purpose

  Verify that a Generic Attribute Profile server can support discovery of Services or Characteristics by different means.

- Reference

  [1] 4.1.1

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - The Upper Tester has access to the IUT server database structure.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.

- Test Case Configuration

Test Case	Rounds	Parameters	Initial Handle Range	Lower Tester <-> IUT
GATT/SR/GAD/BV-01-C [Discover All Primary Services – from Server]	1	Attribute Group Type = «Primary Service»	Starting handle = 0x0001, Ending handle = 0xFFFF	ATT_READ_BY_GROUP_TYPE_REQ (0x10) ATT_READ_BY_GROUP_TYPE_RSP (0x11)
GATT/SR/GAD/BV-02-C [Discover Primary Service by Service UUID – from Server]	1. 16-bit UUID 2. 128-bit UUID	Attribute Type = «Primary Service», Service UUID	Starting handle = 0x0001, Ending handle = 0xFFFF	ATT_FIND_BY_TYPE_VALUE_REQ (0x06) ATT_FIND_BY_TYPE_VALUE_RSP (0x07)
GATT/SR/GAD/BV-03-C [Find Included Services – from Server]	1	Attribute Type = «Include»	Specified by Service definition	ATT_READ_BY_TYPE_REQ (0x08) ATT_READ_BY_TYPE_RSP (0x09)
GATT/SR/GAD/BV-04-C [Discover All Characteristics of a Service – from Server]	1	Attribute Type = «Characteristic»	Specified by Service definition	ATT_READ_BY_TYPE_REQ (0x08) ATT_READ_BY_TYPE_RSP (0x09)
GATT/SR/GAD/BV-05-C [Discover Characteristics by UUID – from Server]	1. 16-bit UUID 2. 128-bit UUID	Attribute Type = «Characteristic»	Specified by Service definition	ATT_READ_BY_TYPE_REQ (0x08) ATT_READ_BY_TYPE_RSP (0x09)
GATT/SR/GAD/BV-06-C [Discover All Characteristic Descriptors – from Server]	1	start handle, end handle	Specified by Service definition	ATT_FIND_INFORMATION_REQ (0x04) ATT_FIND_INFORMATION_RSP (0x05)

Table 4.5: Discovery Using GATT – from Server test cases

- Test Procedure

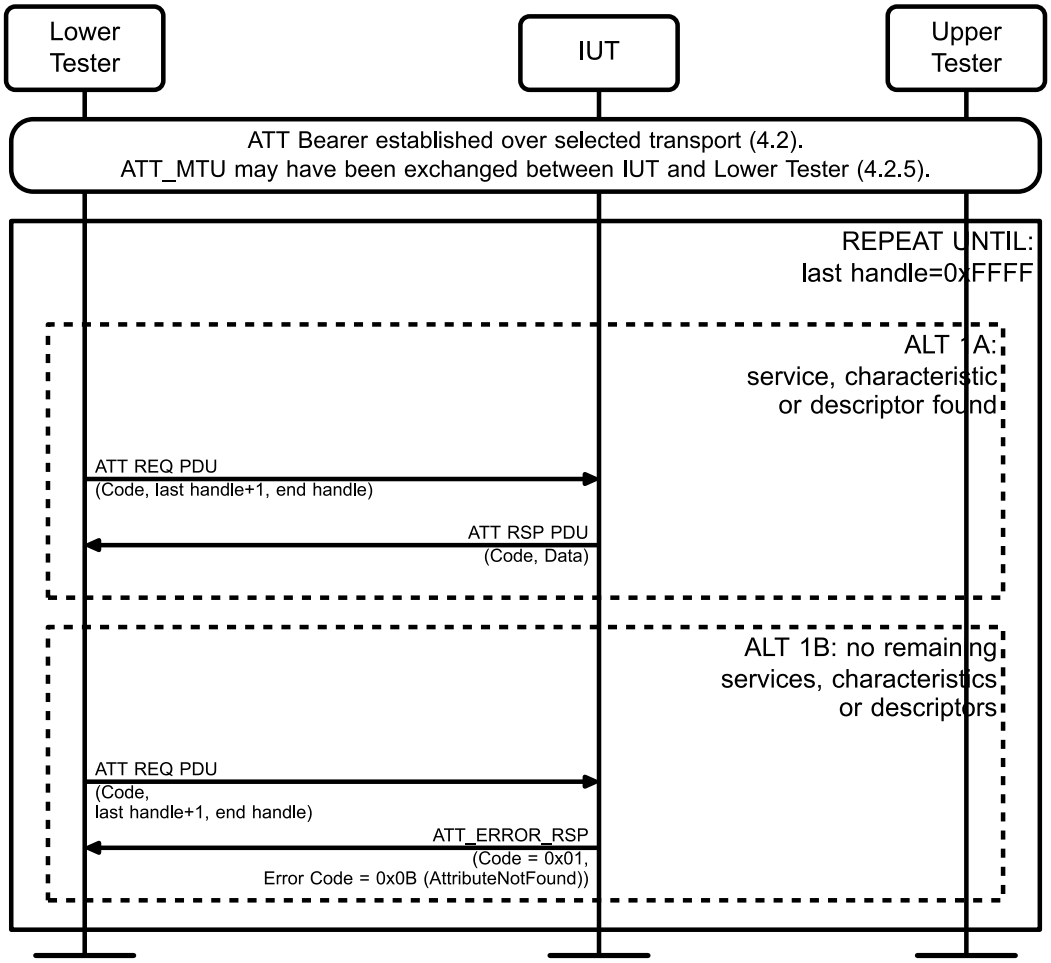


Figure 4.7: Discovery Using GATT – from Server MSC

Execute Steps 1–2 for each round in Table 4.5, when applicable:

1. The Lower Tester sends an initial ATT REQ PDU as indicated in the Lower Tester <-> IUT column of Table 4.5, with starting handle = 0x0001, ending handle = 0xFFFF, and the parameters in the Parameters column.

   In the subsequent repetitions, the Lower Tester sends ATT REQ PDUs, with next starting handle, ending handle = 0xFFFF, until the IUT returns an ATT_ERROR_RSP indicating AttributeNotFound, or the IUT returns an ATT RSP PDU containing handle 0xFFFF.

2. If the IUT returns an ATT RSP PDU as indicated in the Lower Tester <-> IUT column of Table 4.5, the requested data is found in the GATT database.

- Expected Outcome

  Pass verdict

  For each ATT REQ PDU that the Lower Tester sends, the IUT sends a correctly formatted ATT RSP PDU to the Lower Tester or an ATT_ERROR_RSP if there is no handle/UUID pair matching the request.

  The IUT reports all service UUIDs known to be contained in its database.

The IUT sends all ATT RSP PDUs to the Lower Tester within the applicable timeout (Section 3.3.3 of ATT [5]).

The response size does not exceed any negotiated ATT_MTU.

GATT/CL/GAD/BV-03-C [Find Included Services – by Client]

- Test Purpose

  Verify that a Generic Attribute Profile client can find «Include» service declarations within a specified service definition on a server.

- Reference

  [1] 4.5.1

  [5] 3.4.1.1, 3.4.4.1, 3.4.4.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - The Upper Tester has access to the test database contained in the Lower Tester, so that the Upper Tester can specify the service handle range.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The IUT may have performed the procedure in GATT/CL/GAD/BV-01-C [Discover All Primary Services – by Client] or GATT/CL/GAD/BV-02-C [Discover Primary Service by Service UUID – by Client] and cached the attribute handles and Service UUID's of all Primary Services in the Lower Tester database.
  - Use four or more distinct Sample Databases derived from the Library defined Section 3.3. At least one of the inquired service handle ranges contains a mix of Services with 16-bit and 128-bit service UUIDs.

- Test Procedure

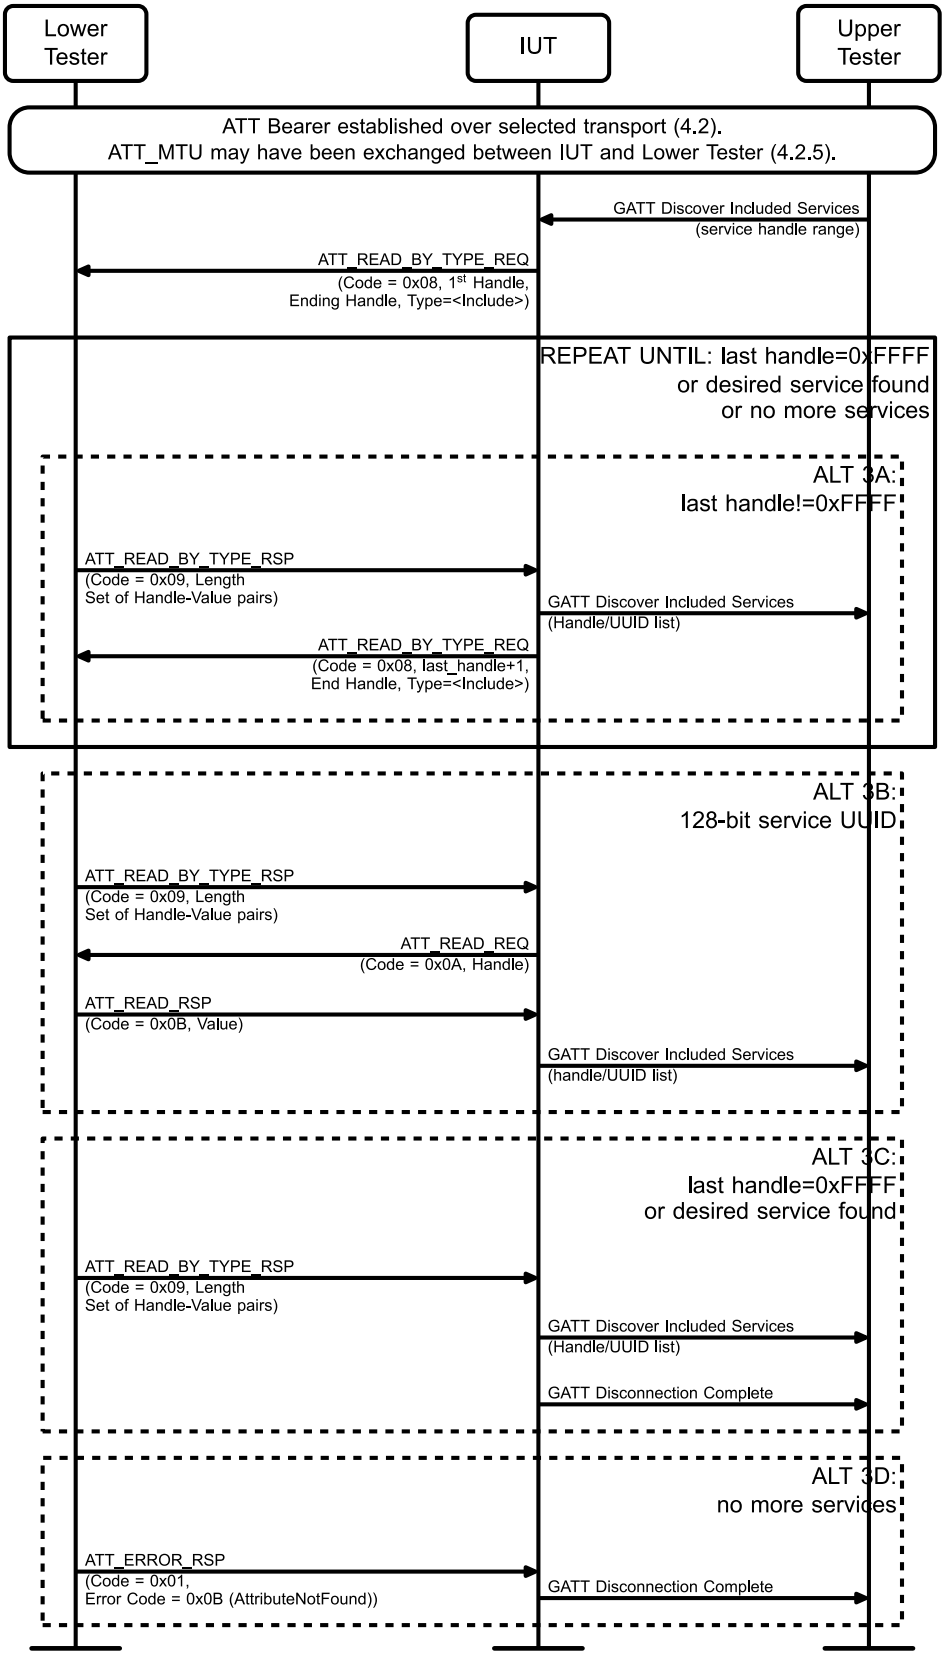


Figure 4.8: GATT/CL/GAD/BV-03-C [Find Included Services – by Client] MSC

Repeat Steps 1–3 at least four times:

1. The Upper Tester sends a request to the IUT to discover the included services, specifying the starting and ending handles of the service definition (e.g., GATT Discover Included Services (service handle range).
2. The IUT sends ATT_READ_BY_TYPE_REQ PDUs to the Lower Tester, with starting handle and ending handle of the specified service and the Attribute Type = «Include».
3. Perform alternative 3A, 3B, 3C, or 3D depending on the Lower Tester's response to the REQ PDU in Step 2.

   Alternative 3A (Lower Tester sends a RSP PDU with last handle != 0xFFFF):

   3A.1 Repeat Steps 3A.2–3A.4 until a response with End Group Handle = 0xFFFF is received, a desired service or characteristic is found, or an ATT_ERROR_RSP is received.

   3A.2 The Lower Tester sends an ATT_READ_BY_TYPE_RSP PDU with last handle != 0xFFFF and valid data.

   3A.3 The IUT sends a report to the Upper Tester with the data received from the Lower Tester, e.g., GATT Discover Included Services (Handle/UUID List).

   3A.4 The IUT sends in all subsequent REQ PDUs the starting handle set to one greater than the last End Group Handle in the RSP PDU.

   Alternative 3B («Include» declaration returned a 128-bit service UUID, the IUT supports 128-bit UUIDs, and the service UUID was not already obtained via Primary Service Discovery):

   3B.1 The Lower Tester sends an ATT_READ_BY_TYPE_RSP PDU with last handle != 0xFFFF and valid data.

   3B.2 The IUT sends an ATT_READ_REQ PDU to the Lower Tester with the handle set to the attribute handle of the included service to obtain the service UUID.

   3B.3 The Lower Tester sends an ATT_READ_RSP PDU with Value containing the service UUID.

   3B.4 The IUT sends a report to the Upper Tester with the data received from the Lower Tester, e.g., GATT Discover Included Services (Handle/UUID List).

   Alternative 3C (Lower Tester sends a RSP PDU with last handle = 0xFFFF OR with the desired service or characteristic):

   3C.1 The Lower Tester sends an ATT_READ_BY_TYPE_RSP PDU with the desired service or with the last handle != 0xFFFF.

   3C.2 The IUT sends a report to the Upper Tester with the data received from the Lower Tester, e.g., GATT Discover Included Services (Handle/UUID List).

   3C.3 The IUT indicates to the Upper Tester a completion message, e.g., GATT Discovery Complete.

   Alternative 3D (Lower Tester sends ATT_ERROR_RSP, if the attribute is not found in the handle interval):

   3D.1 The Lower Tester sends an ATT_ERROR_RSP PDU with the Error Code = 0x0B (AttributeNotFound).

   3D.2 The IUT indicates to the Upper Tester a completion message, e.g., GATT Discovery Complete.

- Expected Outcome

  Pass verdict

  The IUT sends ATT_READ_BY_TYPE_REQ PDUs to the Lower Tester until all «Include» service declarations in the specified handle range are returned.

  If the IUT supports 128-bit service UUIDs, when an «Include» declaration returned in the ATT_READ_BY_TYPE_RSP PDU does not contain the service UUID, and the IUT has not previously

discovered the service UUID via Primary Service Discovery, the IUT gets the service UUID by sending an ATT_READ_REQ PDU with the handle set to the attribute handle of the included service. If the IUT has previously discovered the service UUID via Primary Service Discovery and/or Relationship Discovery, the IUT may optionally send ATT_READ_REQ PDUs to get all included service UUIDs.

The IUT does not report any included services that should not be part of the primary service.

4.5.3 Discover Services Using SDP – by Client

- Test Purpose

  Verify that a Service Discovery Protocol client IUT discovers (Primary) GATT services in a GATT server using SDP over BR/EDR.

- Reference

  [1] 4.1.1

- Initial Condition

  - The link and L2CAP channel connection with the Lower Tester is set up over the BR/EDR transport. A CID has been established.
  - The Lower Tester instantiates a Service Database, including GATT services. The Upper Tester knows the handles and UUIDs of those GATT services.

- Test Case Configuration

Test Case	Type of Service	SDP Primitive
GATT/CL/GAD/BV-07-C [Discover Primary Services Using SDP – by Client]	Primary GATT Service	SDP Discover GATT Services (handle/UUID list)
GATT/CL/GAD/BV-08-C [Discover Services by UUID Using SDP – by Client]	GATT Service	SDP Discover GATT Services by UUID (UUID list)

Table 4.6: Discover Services Using SDP – by Client test cases

- Test Procedure

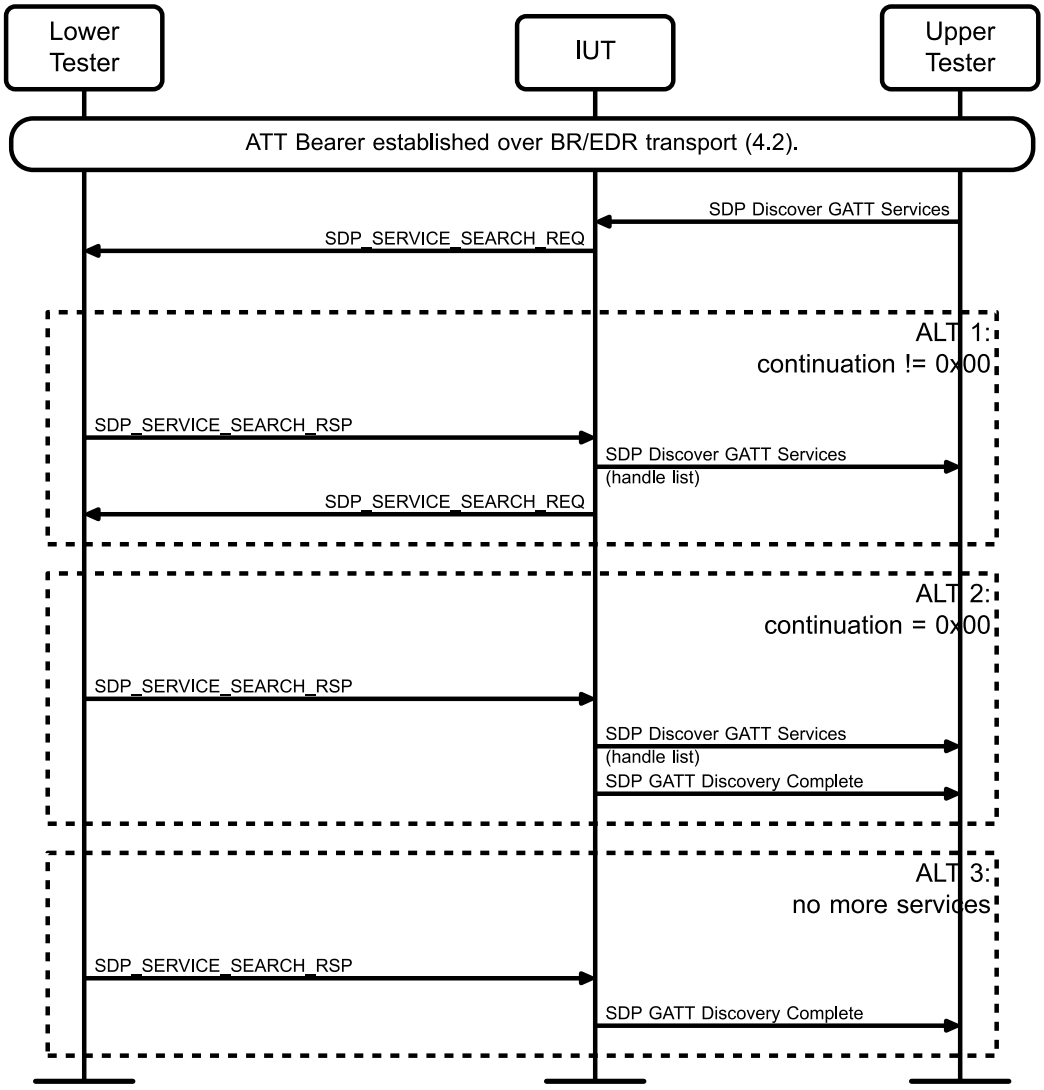


Figure 4.9: Discover Services Using SDP – by Client MSC – Page 1 of 2

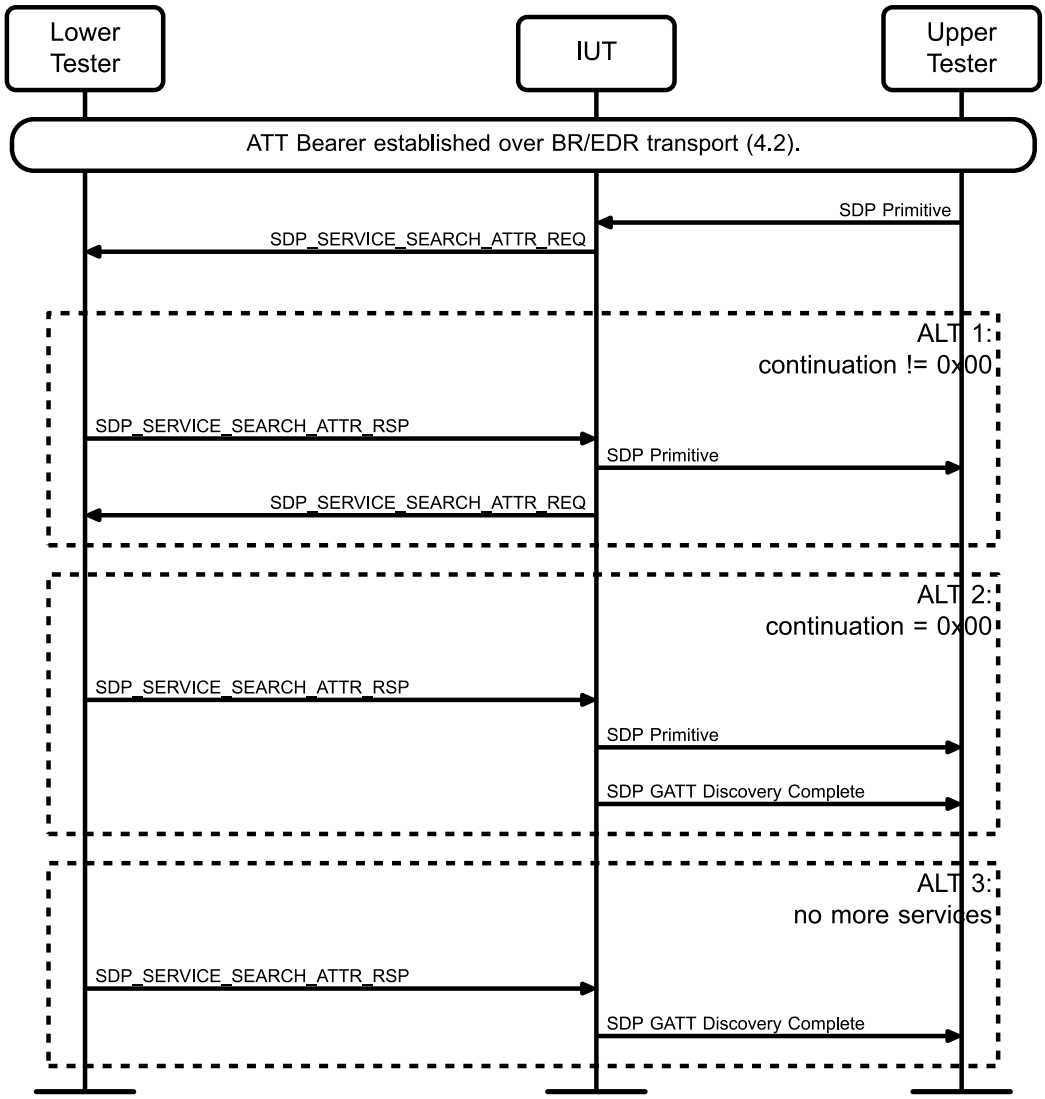


Figure 4.10: Discover Services Using SDP – by Client MSC – Page 2 of 2

Both MSCs are example procedures and may be used as references.

Repeat Steps 1–2 for four rounds, using distinct Sample Databases derived from the Library defined Section 3.3:

1. The Upper Tester sends a request to the IUT to initiate Primary GATT Service Discovery over SDP, as indicated in Table 4.6, column SDP Primitive.
2. The IUT receives the response from the Lower Tester and responds to the Upper Tester with the list of GATT services. The Upper Tester verifies that the list contains only the GATT services with the requested service UUID.

- Expected Outcome

  Pass verdict

  The IUT executes an SDP search for the type of GATT services indicated in Table 4.6 and specified by the Service UUID, which use the ATT Protocol. The SDP commands sent by the IUT are correctly formatted.

The IUT receives the response from the Lower Tester and responds to the Upper Tester with the list of services. The Upper Tester verifies that the list contains only the GATT services with the requested service UUID.

The IUT should continue the search until the Lower Tester indicates that the search is complete; then, it reports that the search is complete to the Upper Tester, e.g., SDP GATT Discovery Complete.

GATT/SR/GAD/BV-07-C [Discover Primary Services using SDP – from Server]

- Test Purpose

  Verify that a Generic Attribute Profile server IUT can support a search for all GATT services it contains.

- Reference

  [1] 4.4.1, 9

  [9] 2.6, 4.5

- Initial Condition

  - The link and L2CAP channel connection with the Lower Tester is set up over the BR/EDR transport. A CID has been established.
  - The IUT's server database includes at least the «GAP Service» and the «GATT Service».

- Test Procedure

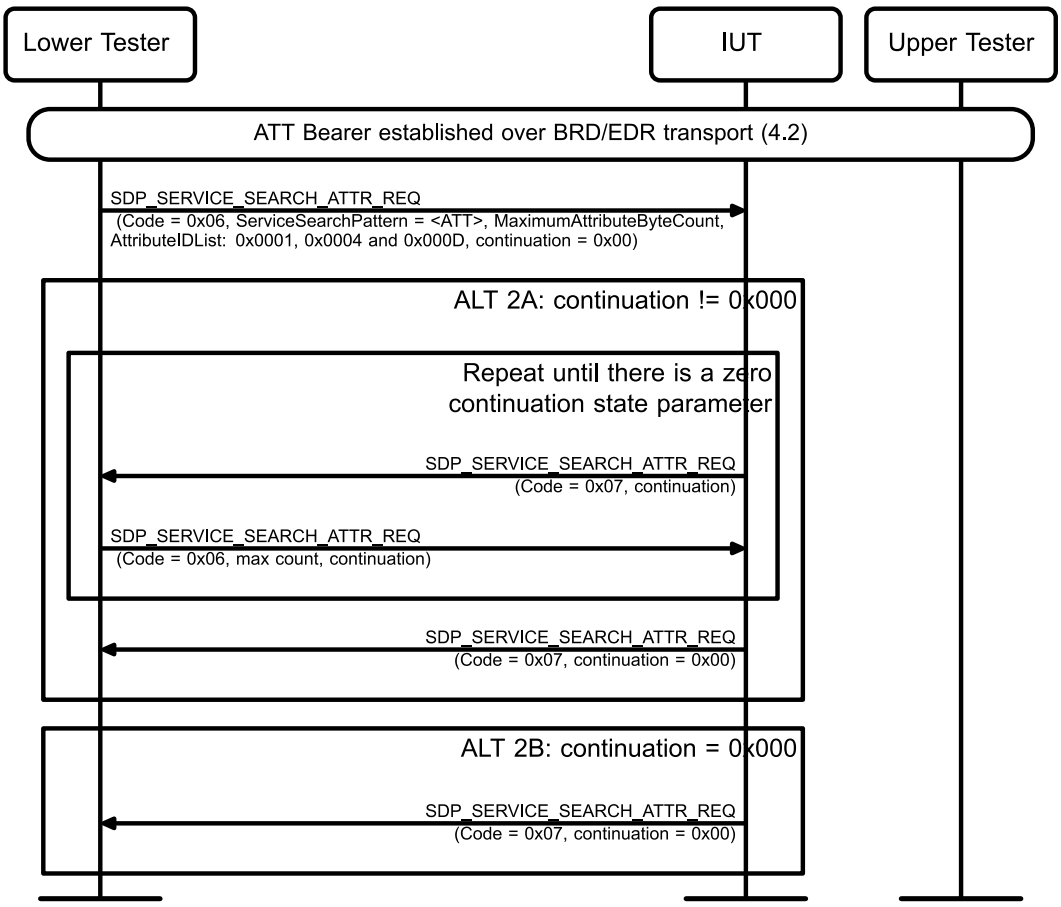


Figure 4.11: GATT/SR/GAD/BV-07-C [Discover Primary Services using SDP – from Server] MSC

1. The Lower Tester sends an initial SDP_SERVICE_SEARCH_ATTR_REQ (code=0x06, a service search parameter UUID of <ATT>, a non-zero value for maximum attribute byte count parameter, an AttributeIDList parameter of attribute IDs 0x0001, 0x0004, and 0x000D, and a continuation state parameter of 0x00.
2. Perform either alternative 2A or 2B depending on the continuation state parameter returned by the IUT.
   Alternative 2A (The IUT returns an SDP_SERVICE_SEARCH_ATTR_RSP including a non-zero continuation state parameter):
   - 2A.1 Continue the test by sending another SDP_SERVICE_SEARCH_ATTR_REQ, including the returned continuation state parameter, from the Lower Tester to the IUT.
   - 2A.2 Once the IUT returns an SDP_SERVICE_SEARCH_ATTR_RSP, with a zero continuation state parameter, terminate the test.

   Alternative 2B (The IUT returns an SDP_SERVICE_SEARCH_ATTR_RSP including a zero continuation state parameter):
   - 2B.1 Terminate the test.

- Expected Outcome

  Pass verdict

  For each SDP_SERVICE_SEARCH_ATTR_REQ, the IUT sends a correctly formatted SDP_SERVICE_SEARCH_ATTR_RSP to the Lower Tester.

  The IUT reports the service UUID (either UUID16 or UUID128) for each GATT service contained in its database.

  At least the SDP records for the «GAP Service» and the «GATT Service» are discovered on the IUT.

  For the «GATT Service» SDP record:

  - If the IUT ICS support is as follows: GATT 2/1 (Unenhanced ATT bearer over BR/EDR) AND NOT GATT 2/3b (Enhanced ATT bearer over BR/EDR), then the IUT's SDP AttributeIDList(0x0004)_Protocol_Descriptor_Parameter_0 = 0x001F (PSM = ATT).
  - If the IUT ICS support is as follows: GATT 2/3b (Enhanced ATT bearer over BR/EDR) AND NOT GATT 2/1 (Unenhanced ATT bearer over BR/EDR), then the IUT's SDP AttributeIDList(0x0004)_Protocol_Descriptor_Parameter_0 = 0x0027 (PSM = EATT).
  - If the IUT ICS support is as follows: GATT 2/1 (Unenhanced ATT bearer over BR/EDR) AND GATT 2/3b (Enhanced ATT bearer over BR/EDR), then the IUT's SDP AttributeIDList(0x0004) Protocol_Descriptor_Parameter_0 for ProtocolDescriptor #0 = 0x001F (PSM = ATT) and the AdditionalProtocolDescriptorList(0x000D) Protocol_Descriptor_List_0 Protocol_Descriptor_Parameter_0 = 0x0027 (PSM = EATT).

GATT/SR/GAD/BV-08-C [Discover Services by UUID using SDP - from Server]

- Test Purpose

  Verify that a Service Discovery Protocol server IUT can support a search for GATT services by UUID.

- Reference

  [1] 4.4.1, 9

  [8] 2.6, 4.5

- Initial Condition

  - The link and L2CAP channel connection with the Lower Tester is set up over the BR/EDR transport. A CID has been established.
  - The <Service UUID> (TSPX_additional_service_uuid_for_sdp) is declared as an IXIT [9] value.
  - The IUT's server database includes at least one GATT service in addition to the «GAP Service» and the «GATT Service»; the <Service UUID> of that additional service is known by the Lower Tester from IXIT [9].

- Test Procedure

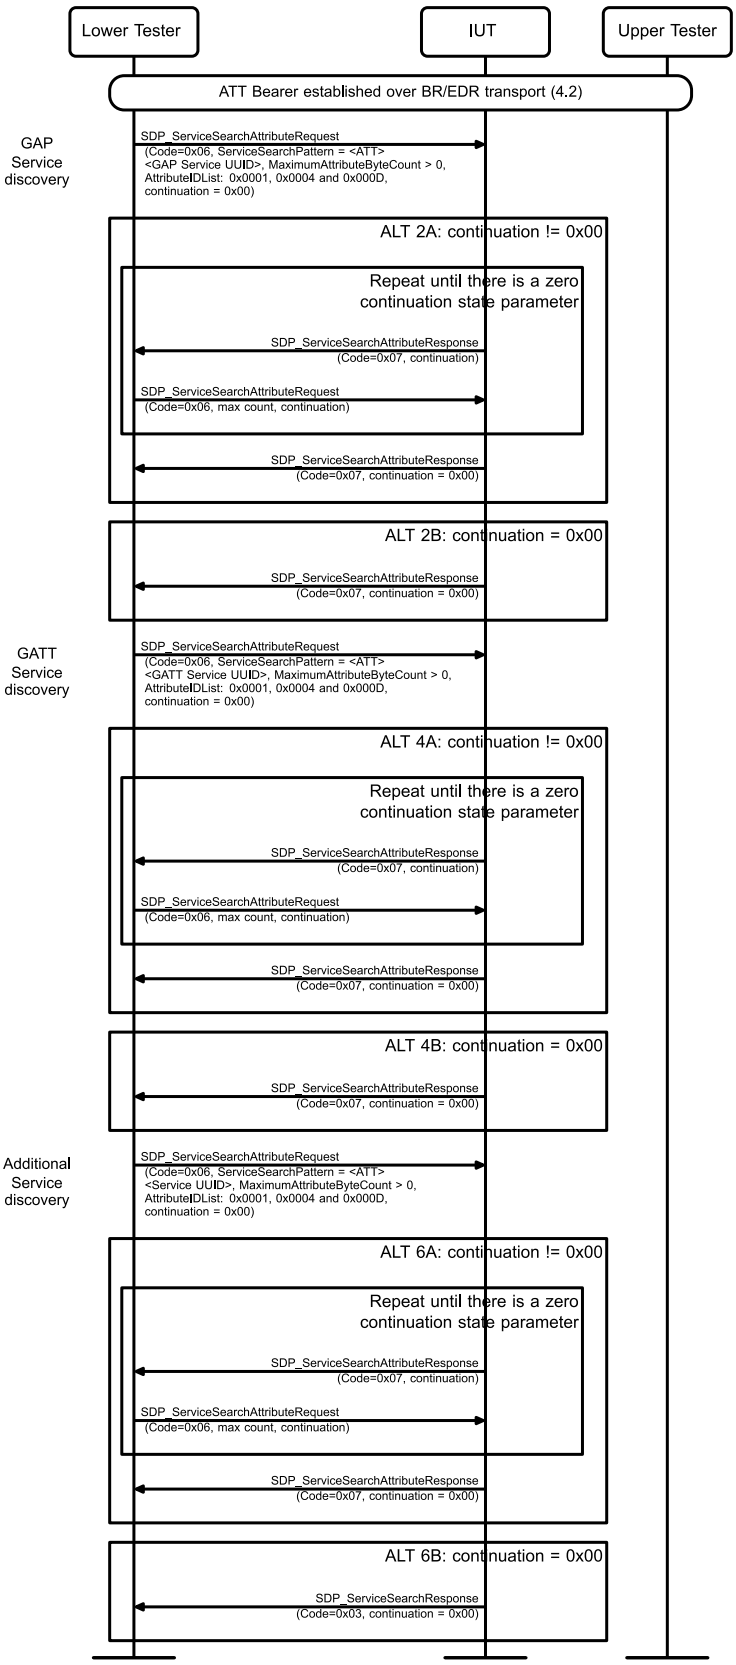


Figure 4.12: GATT/SR/GAD/BV-08-C [Discover Services by UUID using SDP – from Server] MSC

1. The Lower Tester sends an SDP_SERVICE_SEARCH_ATTR_REQ (code=0x06), a service search parameter UUID of <ATT> and the <GAP Service UUID>, a non-zero value for maximum attribute byte count parameter, an AttributeIDList parameter of attribute IDs 0x0001, 0x0004, and 0x000D, and a continuation state parameter of 0x00.
2. Perform either alternative 2A or 2B depending on the continuation state parameter returned by the IUT:
   Alternative 2A (The IUT returns an SDP_SERVICE_SEARCH_ATTR_RSP including a non-zero continuation state parameter):
   - 2A.1 Continue the test by sending additional SDP_SERVICE_SEARCH_ATTR_REQ, including the returned continuation state parameter, from the Lower Tester to the IUT until the IUT returns a zero continuation state parameter.
   - 2A.2 Once the IUT returns an SDP_SERVICE_SEARCH_ATTR_RSP, with a zero continuation state parameter, proceed to Step 3.

   Alternative 2B (The IUT returns an SDP_SERVICE_SEARCH_ATTR_RSP including a zero continuation state parameter):
   - 2B.1 Proceed to Step 3.
3. The Lower Tester sends an SDP_SERVICE_SEARCH_ATTR_REQ (code=0x06), a service search parameter UUID of <ATT> and the <GATT Service UUID>, a non-zero value for maximum attribute byte count parameter, an AttributeIDList parameter of attribute IDs 0x0001, 0x0004, and 0x000D, and a continuation state parameter of 0x00.
4. Perform either alternative 4A or 4B depending on the continuation state parameter returned by the IUT:
   Alternative 4A (The IUT returns an SDP_SERVICE_SEARCH_ATTR_RSP including a non-zero continuation state parameter):
   - 4A.1 Continue the test by sending additional SDP_SERVICE_SEARCH_ATTR_REQ, including the returned continuation state parameter, from the Lower Tester to the IUT until the IUT returns a zero continuation state parameter.
   - 4A.2 Once the IUT returns an SDP_SERVICE_SEARCH_ATTR_RSP, with a zero continuation state parameter, proceed to Step 5.

   Alternative 4B (The IUT returns an SDP_SERVICE_SEARCH_ATTR_RSP including a zero continuation state parameter):
   - 4B.1 Proceed to Step 5.
5. The Lower Tester sends an SDP_SERVICE_SEARCH_ATTR_REQ (code=0x06), a service search parameter UUID of <ATT> and the <Service UUID>, a non-zero value for maximum attribute byte count parameter, an AttributeIDList parameter of attribute IDs 0x0001, 0x0004, and 0x000D, and a continuation state parameter of 0x00.
6. Perform either alternative 6A or 6B depending on the continuation state parameter returned by the IUT:
   Alternative 6A (The IUT returns an SDP_SERVICE_SEARCH_ATTR_RSP including a non-zero continuation state parameter):
   - 6A.1 Continue the test by sending additional SDP_SERVICE_SEARCH_ATTR_REQ, including the returned continuation state parameter, from the Lower Tester to the IUT until the IUT returns a zero continuation state parameter.
   - 6A.2 Once the IUT returns an SDP_SERVICE_SEARCH_ATTR_RSP, with a zero continuation state parameter, proceed to Step 7.

   Alternative 6B (The IUT returns an SDP_SERVICE_SEARCH_ATTR_RSP including a zero continuation state parameter):
   - 6B.1 Proceed to Step 7.
7. Once the IUT returns an SDP_SERVICE_SEARCH_ATTR_RSP, with a zero continuation state parameter, terminate the test.

- Expected Outcome

  Pass verdict

  For each SDP_SERVICE_SEARCH_ATTR_REQ, the IUT sends a correctly formatted SDP_SERVICE_SEARCH_ATTR_RSP to the Lower Tester.

  The IUT reports the Service UUID (either UUID16 or UUID128) for each GATT service discovered by the Lower Tester.

  The SDP records for the «GAP Service» and the «GATT Service» are discovered on the IUT as well as the additional GATT service.

  For the «GATT Service» SDP record:

  - If the IUT ICS support is as follows: GATT 2/1 (Unenhanced ATT bearer over BR/EDR) AND NOT GATT 2/3b (Enhanced ATT bearer over BR/EDR), then the IUT's SDP AttributeIDList(0x0004)_Protocol_Descriptor_Parameter_0 = 0x001F (PSM = ATT).
  - If the IUT ICS support is as follows: GATT 2/3b (Enhanced ATT bearer over BR/EDR) AND NOT GATT 2/1 (Unenhanced ATT bearer over BR/EDR), then the IUT's SDP AttributeIDList(0x0004)_Protocol_Descriptor_Parameter_0 = 0x0027 (PSM = EATT).
  - If the IUT ICS support is as follows: GATT 2/1 (Unenhanced ATT bearer over BR/EDR) AND GATT 2/3b (Enhanced ATT bearer over BR/EDR), then the IUT's SDP AttributeIDList(0x0004) Protocol_Descriptor_Parameter_0 for ProtocolDescriptor #0 = 0x001F (PSM = ATT) and the AdditionalProtocolDescriptorList(0x000D) Protocol_Descriptor_List_0 Protocol_Descriptor_Parameter_0 = 0x0027 (PSM = EATT).

4.6 Read

Verify Generic Attribute Profile reading of Characteristic Values and Characteristic Descriptors.

4.6.1 Read Characteristic – by Client

- Test Purpose

  Verify Generic Attribute Profile client behavior when executing a Read Characteristic Value or Read Characteristic Descriptor procedure.

- Reference

  [1] 4.8.1

  [5] 3.4.1.1, 3.4.4.3, 3.4.4.4

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - If the characteristic or characteristic descriptor permissions require a specific security mode and level, execute pairing and/or bonding with the required security mode and level.

- Test Case Configuration

Test Case	Handle
GATT/CL/GAR/BV-01-C [Read Characteristic Value – by Client]	Characteristic
GATT/CL/GAR/BV-06-C [Read Characteristic Descriptor – by Client]	Characteristic Descriptor

Table 4.7: Read Characteristic – by Client test cases

- Test Procedure

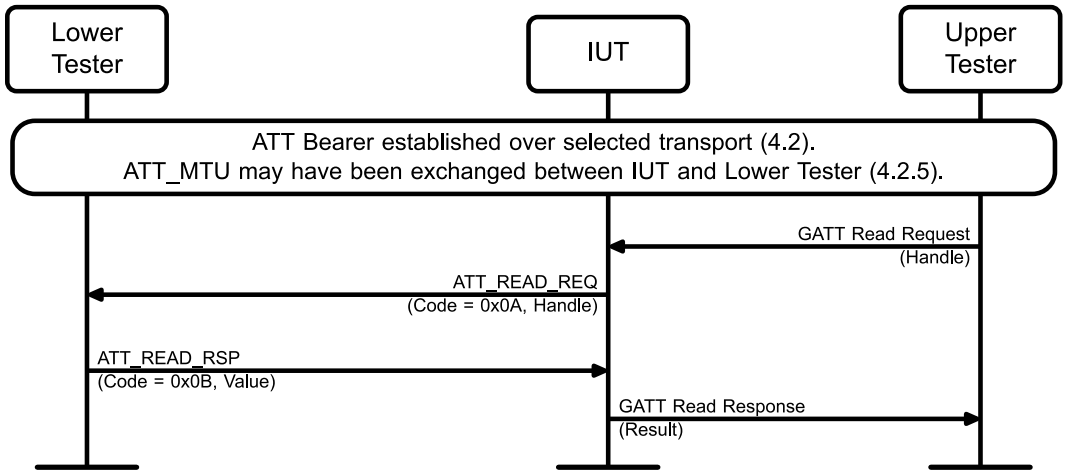


Figure 4.13: Read Characteristic – by Client MSC

1. The Upper Tester sends a request to the IUT to read the value of an attribute from the Lower Tester, by specifying the Handle, as indicated in Table 4.7, column Handle, e.g., GATT Read Request(Handle).
2. The IUT sends a correctly formatted ATT_READ_REQ PDU (0x0A) to the Lower Tester.
3. The Lower Tester sends an ATT_READ_RSP PDU (0x0B) to the IUT, with the corresponding value.
4. The IUT sends the received response to the Upper Tester, e.g., GATT Read Response.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends a correctly formatted ATT_READ_REQ PDU to the Lower Tester, with the Handle indicated in Table 4.7, column Handle.

  In Step 4, upon receiving an ATT_READ_RSP PDU from the Lower Tester, the IUT sends the result to the Upper Tester, e.g., *GATT Read Response(result)*.

4.6.2 Read Characteristic Value Rejected – by Client

- Test Purpose

  Verify Generic Attribute Profile client behavior when executing a Read Characteristic Value procedure.

- Reference

  [1] 4.8.1

  [5] 3.4.1.1, 3.4.4.3, 3.4.4.4

- Initial Condition
  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
- Test Case Configuration

Test Case	Additional Initial Condition	Error Code
GATT/CL/GAR/BI-01-C [Read Characteristic Value – Invalid Handle]	N/A	0x01 (Invalid Handle)
GATT/CL/GAR/BI-02-C [Read Characteristic Value – Read Not Permitted]	A handle of a Characteristic Value in the Lower Tester is selected.	0x02 (Read Not Permitted)
GATT/CL/GAR/BI-03-C [Read Characteristic Value – Insufficient Authorization]	A handle of a Characteristic Value in the Lower Tester that requires read authorization is selected. No authorization procedure has been performed between the IUT and the Lower Tester.	0x08 (Insufficient Authorization)
GATT/CL/GAR/BI-04-C [Read Characteristic Value – Insufficient Authentication]	A handle of a Characteristic Value in the Lower Tester that requires read authentication is selected. No authentication procedure has been performed between the IUT and the Lower Tester.	0x05 (Insufficient Authentication)
GATT/CL/GAR/BI-05-C [Read Characteristic Value – Insufficient Encryption Key Size]	A preamble procedure defined in Section 4.2.4 is used to set up an encrypted link. A handle of a Characteristic Value in the Lower Tester that requires encryption with a key longer than the key used to establish the encrypted link is selected.	0x0C (Encryption Key Size Too Short)

Table 4.8: Read Characteristic Value Rejected – by Client test cases

- Test Procedure

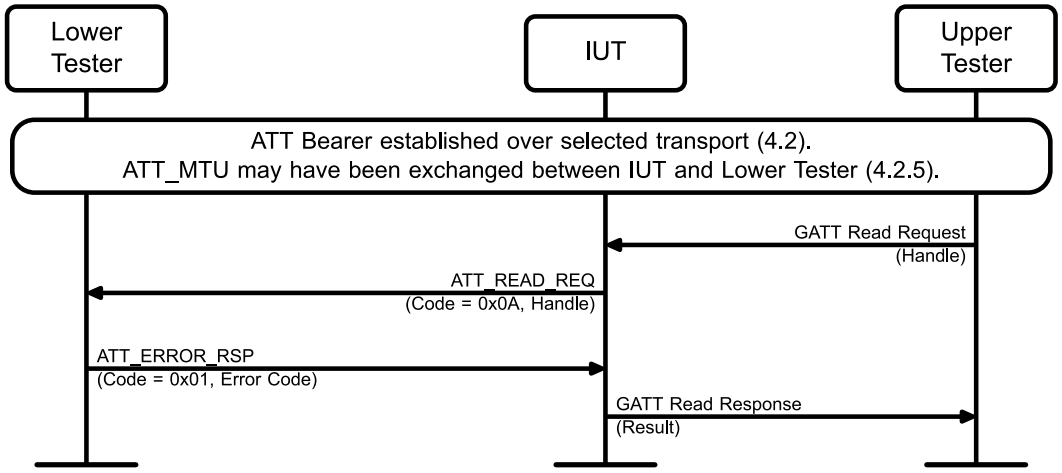


Figure 4.14: Read Characteristic Value Rejected – by Client MSC

1. The Upper Tester sends a GATT command to the IUT to initiate the test, e.g., GATT Read Request (handle).
2. The IUT sends a correctly formatted ATT_READ_REQ PDU to the Lower Tester.
3. The Lower Tester sends an ATT_ERROR_RSP PDU, which contains the error code indicated in Table 4.8, column Error Code.
4. The IUT sends the result to the Upper Tester, e.g., GATT Read Response(result).

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends a correctly formatted ATT_READ_REQ PDU to the Lower Tester.

  In Step 4, upon receiving an ATT RSP PDU from the Lower Tester, the IUT sends the result to the Upper Tester, e.g., *GATT Read Response(result)*.

4.6.3 Read Characteristic – from Server

- Test Purpose

  Verify Generic Attribute Profile server behavior when executing a Read Characteristic Value or Read Characteristic Descriptor procedure.

- Reference

  [1] 4.8.1, 4.12.1

  [5] 3.4.4.3, 3.4.4.4

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The Lower Tester has the necessary security permissions from the IUT to read the characteristic or characteristic descriptor.

- Test Case Configuration

Test Case	Handle
GATT/SR/GAR/BV-01-C [Read Characteristic Value - from Server]	Characteristic
GATT/SR/GAR/BV-06-C [Read Characteristic Descriptor – from Server]	Characteristic Descriptor

Table 4.9: Read Characteristic – from Server test cases

- Test Procedure

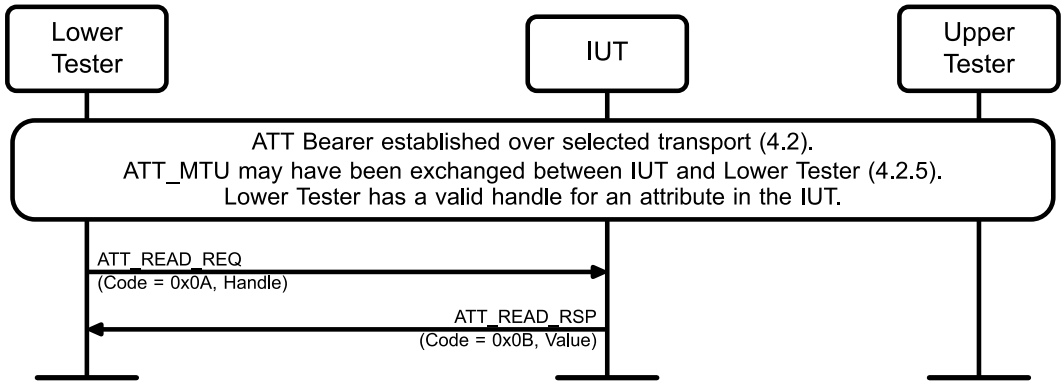


Figure 4.15: Read Characteristic – from Server MSC

1. The Lower Tester sends an ATT_READ_REQ PDU to the IUT, specifying the handle as indicated in Table 4.9, column Handle.
2. The IUT sends an ATT_READ_RSP PDU, with the correct value.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends a correctly formatted ATT_READ_RSP PDU to the Lower Tester.

  The Value is set to the value of the attribute identified by the handle in the ATT_READ_REQ.

  The response size does not exceed any negotiated ATT_MTU. If the Characteristic Value is longer than (ATT_MTU – 1), then the first (ATT_MTU – 1) octets are included in this response.

  The IUT responds within the applicable timeout (Section 3.3.3 of ATT [5]).

4.6.4 Read Characteristic Value – from Server

- Test Purpose

  Verify Generic Attribute Profile server behavior when executing a Read Characteristic Value procedure.

- Reference

  [1] 4.8.1

  [5] 3.4.1.1, 3.4.4.3, 3.4.4.4

- Initial Condition
  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
- Test Case Configuration

Test Case	Additional Initial Condition	Error Code
GATT/SR/GAR/BI-01-C [Read Characteristic Value – Read Not Permitted Response]	A handle of a Characteristic Value in the IUT that does not permit reading is selected.	0x02 (Read Not Permitted)
GATT/SR/GAR/BI-02-C [Read Characteristic Value – Invalid Handle Response]	The Lower Tester selects a handle that is known to be invalid.	0x01, (Invalid Handle)
GATT/SR/GAR/BI-03-C [Read Characteristic Value – Insufficient Authorization]	A handle of a Characteristic Value in the IUT that requires read authorization is selected. No authorization procedure has been performed between the IUT and the Lower Tester.	0x08 (Insufficient Authorization)
GATT/SR/GAR/BI-04-C [Read Characteristic Value – Insufficient Authentication]	A handle of a Characteristic Value in the IUT that requires read authentication is selected. No authentication procedure has been performed between the IUT and the Lower Tester.	0x05 (Insufficient Authentication)
GATT/SR/GAR/BI-05-C [Read Characteristic Value – Insufficient Encryption Key Size]	A preamble procedure defined in Section 4.2.4 is used to set up an encrypted link. A handle of a Characteristic Value in the IUT that requires encryption with a key longer than the key used to establish the encrypted link is selected.	0x0C (Encryption Key Size Too Short)

Table 4.10: Read Characteristic Value – from Server test cases

- Test Procedure

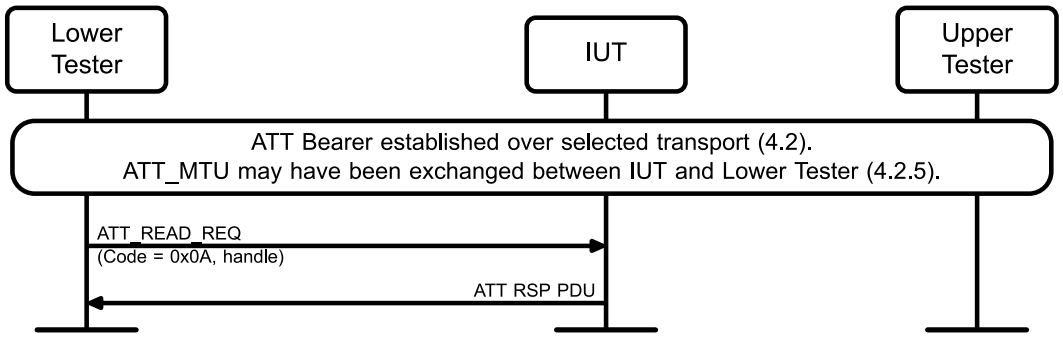


Figure 4.16: Read Characteristic Value – from Server MSC

1. The Lower Tester sends an ATT_READ_REQ PDU to the IUT with the selected handle.
2. The IUT sends an ATT_ERROR_RSP PDU to the Lower Tester with the error code indicated in Table 4.10, column Error Code.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends an ATT_ERROR_RSP PDU to the Lower Tester, containing the error code indicated in Table 4.10, column Error Code.

  The IUT responds within the applicable timeout (Section 3.3.3 of ATT [5]).

GATT/CL/GAR/BV-03-C [Read Using Characteristic UUID – by Client]

- Test Purpose

  Verify that a Generic Attribute Profile client can read a Characteristic Value selected by UUID, using a 16-bit UUID and using a 128-bit UUID.

- Reference

  [1] 4.8.2

  [5] 3.4.4.1, 3.4.4.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The Lower Tester will support at least one characteristic of the type specified by the UUID.
  - A UUID for a characteristic in the Lower Tester that permits reading is selected.
  - If the characteristic permissions require a specific security mode and level, execute pairing and/or bonding with the required security mode and level.

- Test Procedure

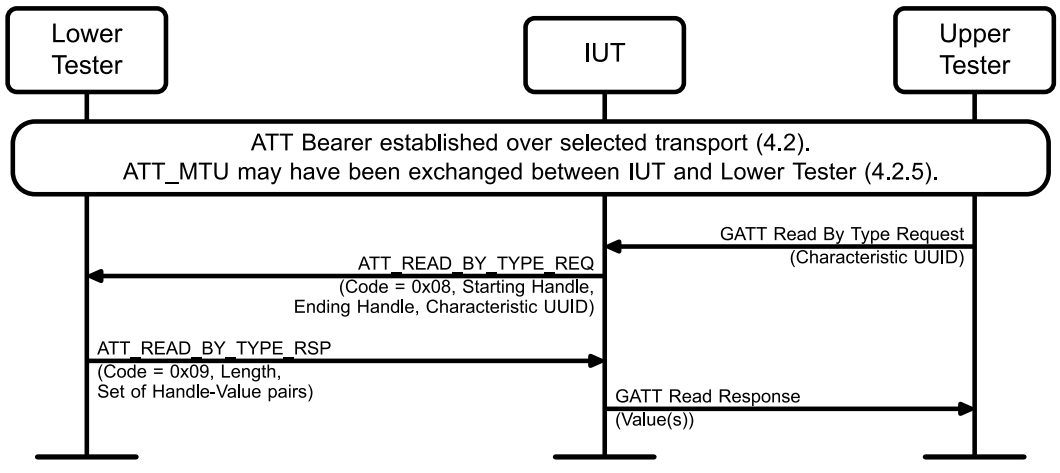


Figure 4.17: GATT/CL/GAR/BV-03-C [Read Using Characteristic UUID – by Client] MSC

Repeat Steps 1–4 for rounds 1–2 in Table 4.11, if supported.

1. The Upper Tester sends a request to the IUT to read a Characteristic from the Lower Tester by specifying the Characteristic UUID, e.g., GATT Read Request(char UUID). The starting and ending handles are set to the range for the service to which the characteristic belongs.
2. The IUT sends a correctly formatted ATT_READ_BY_TYPE_REQ PDU to the Lower Tester.
3. The Lower Tester sends an ATT_READ_BY_TYPE_RSP PDU to the IUT, which contains a set of handle-value pairs for the requested characteristic of the type specified by the UUID.
4. The IUT sends the result to the Upper Tester, e.g., GATT Read Response(result).

Round	Characteristic UUID
1	16-bit UUID
2	128-bit UUID

Table 4.11: Read Using Characteristic UUID rounds

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_READ_BY_TYPE_REQ to the Lower Tester.

  The IUT receives the ATT_READ_BY_TYPE_RSP sent by the Lower Tester.

  The values reported to the Upper Tester match the values delivered by the Lower Tester.

4.6.5 Read Using Characteristic UUID Rejected – by Client

- Test Purpose

  Verify Generic Attribute Profile client behavior when executing the Read Using Characteristic UUID procedure.

- Reference

  [1] 4.8.1

  [5] 3.4.1.1, 3.4.4.3, 3.4.4.4

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.

- Test Case Configuration

Test Case	Additional Initial Condition	Error Code
GATT/CL/GAR/BI-06-C [Read Using Characteristic UUID – Read Not Permitted]	A UUID for a characteristic in the Lower Tester is selected.	0x02 (Read Not Permitted)
GATT/CL/GAR/BI-07-C [Read Using Characteristic UUID – Attribute Not Found]	A UUID that is not used in the Lower Tester is selected. The starting handle is set to 0x0001 and the ending handle is set to 0xFFFF.	0x0A (Attribute Not Found)
GATT/CL/GAR/BI-09-C [Read Using Characteristic UUID – Insufficient Authorization]	A UUID for a characteristic in the Lower Tester that requires read authorization is selected. A handle range is selected in which the selected characteristic UUID occurs only once. No authorization procedure has been performed.	0x08 (Insufficient Authorization)
GATT/CL/GAR/BI-10-C [Read Using Characteristic UUID – Insufficient Authentication]	A UUID for a characteristic in the Lower Tester that requires read authentication is selected. A handle range is selected in which the selected characteristic UUID occurs only once. No authentication procedure has been performed.	0x05 (Insufficient Authentication)
GATT/CL/GAR/BI-11-C [Read Using Characteristic UUID – Insufficient Encryption Key Size]	A preamble procedure defined in Section 4.2.4 is used to set up an encrypted link. A UUID for a characteristic in the Lower Tester that requires encryption with a key longer than the key used to establish the encrypted link is selected. A handle range is selected in which the selected characteristic UUID occurs only once.	0x0C (Encryption Key Size Too Short)

Table 4.12: Read Using Characteristic UUID Rejected – by Client test cases

- Test Procedure

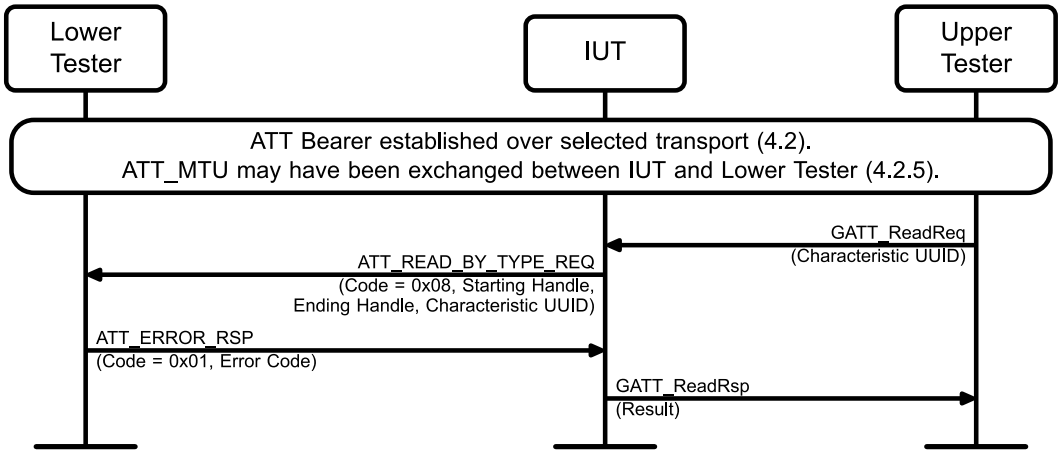


Figure 4.18: Read Using Characteristic UUID Rejected – by Client MSC

1. The Upper Tester sends a GATT command to the IUT to initiate the test, e.g., GATT Read Request(char UUID).
2. The IUT sends a correctly formatted ATT_READ_BY_TYPE_REQ PDU to the Lower Tester.
3. The Lower Tester sends an ATT_ERROR_RSP PDU to the IUT, which contains the error code indicated in Table 4.12, column Error Code.
4. The IUT sends the result to the Upper Tester, e.g., GATT Read Response(result).

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_READ_BY_TYPE_REQ PDU (0x08) to the Lower Tester.

  Upon receiving an ATT RSP PDU from the Lower Tester, the IUT sends the result to the Upper Tester, e.g., GATT Read Response(result).

GATT/SR/GAR/BV-03-C [Read Using Characteristic UUID – from Server]

- Test Purpose

  Verify that a Generic Attribute Profile server can support the Read using Characteristic UUID procedure, using a 16-bit UUID and using a 128-bit UUID if supported.

- Reference

  [1] 4.8.2

  [5] 3.4.4.1, 3.4.4.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The Lower Tester has the necessary security permissions from the IUT to read a characteristic.

- Test Procedure

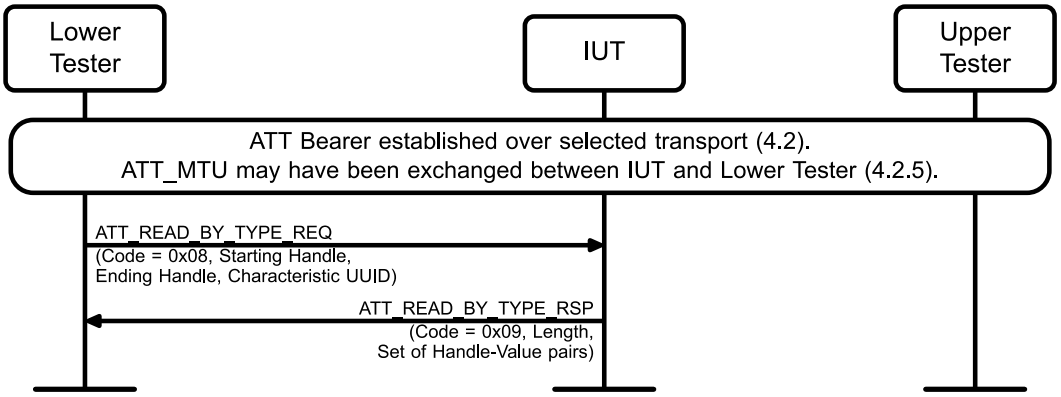


Figure 4.19: GATT/SR/GAR/BV-03-C [Read Using Characteristic UUID – from Server] MSC

Repeat Steps 1–2 for rounds 1–2 in Table 4.13, if supported.

1. The Lower Tester sends an ATT_READ_BY_TYPE_REQ PDU to the IUT, with the selected handle range and UUID.
2. The IUT sends an ATT_READ_BY_TYPE_RSP PDU to the Lower Tester containing a list of Handle-Value pairs.

Round	Characteristic UUID
1	16-bit UUID
2	128-bit UUID

Table 4.13: Read Using Characteristic UUID rounds

- Expected Outcome

  Pass verdict

  For each pass:

  - The IUT sends a correctly formatted ATT_READ_BY_TYPE_RSP (result code 0x09) command to the Lower Tester, containing a list of Attribute Handle and Attribute Value pairs corresponding to the characteristics contained in the handle range provided.
  - If the Attribute Value is longer than (ATT_MTU – 4) or 253, whichever is smaller, then the first (ATT_MTU – 4) or 253 octets are included in this response. The response does not exceed the ATT_MTU.
  - The IUT sends each ATT_READ_BY_TYPE_RSP to the Lower Tester within the applicable timeout (Section 3.3.3 of ATT [5]).

4.6.6 Rejecting Read Using Characteristic UUID – from Server

- Test Purpose

  Verify Generic Attribute Profile server behavior when executing a Read Characteristic Value procedure.

- Reference

  [1] 4.8.1

  [5] 3.4.1.1, 3.4.4.3, 3.4.4.4

- Initial Condition
  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
- Test Case Configuration

Test Case	Additional Initial Condition	Error Code
GATT/SR/GAR/BI-06-C [Read Characteristic by UUID – Read Not Permitted Response]	A UUID for a characteristic in the IUT that does not permit reading is selected. A handle range is selected in which the selected characteristic UUID occurs only once.	0x02 (Read Not Permitted)
GATT/SR/GAR/BI-07-C [Read Characteristic by UUID – Attribute Not Found Response]	A UUID that is not used in the Lower Tester is selected. The starting handle is set to 0x0001 and the ending handle is set to 0xFFFF.	0x0A (Attribute Not Found)
GATT/SR/GAR/BI-08-C [Read Characteristic by UUID – Invalid Handle Response]	The UUID is set to the UUID for «Primary Service». The starting handle is set to 0x0002 and the ending handle is set to 0x0001 such that the ending handle is less than the starting handle.	0x01 (Invalid Handle)
GATT/SR/GAR/BI-09-C [Read Using Characteristic UUID – Insufficient Authorization]	A UUID for a characteristic in the IUT that requires read authorization is selected. A handle range is selected in which the selected characteristic UUID occurs only once. No authorization procedure has been performed.	0x08 (Insufficient Authorization)
GATT/SR/GAR/BI-10-C [Read Using Characteristic UUID – Insufficient Authentication]	A UUID for a characteristic in the IUT that requires read authentication is selected. A handle range is selected in which the selected characteristic UUID occurs only once. No authentication procedure has been performed.	0x05 (Insufficient Authentication)
GATT/SR/GAR/BI-11-C [Read Using Characteristic UUID – Insufficient Encryption Key Size]	A UUID for a characteristic in the IUT that requires encryption with a key longer than the key used to establish the encrypted link is selected. A handle range is selected in which the selected characteristic UUID occurs only once.	0x0C (Encryption Key Size Too Short)

Table 4.14: Rejecting Read Using Characteristic UUID – from Server test cases

- Test Procedure

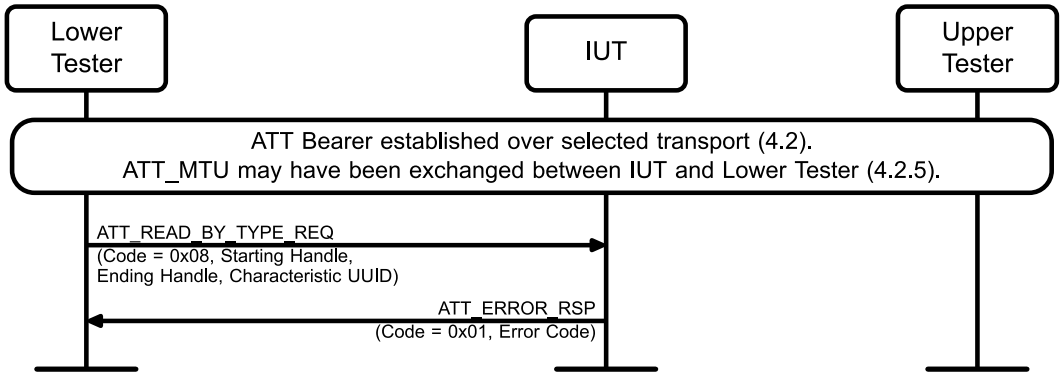


Figure 4.20: Rejecting Read Using Characteristic UUID – from Server MSC

1. The Lower Tester sends an ATT_READ_BY_TYPE_REQ PDU to the IUT, with the selected handle range and UUID.
2. The IUT sends an ATT_ERROR_RSP PDU to the Lower Tester, with the error code indicated in Table 4.14, column Error Code.

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_ERROR_RSP PDU, with the error code indicated in the Error Code column of Table 4.14 to the Lower Tester.

  The IUT responds within the applicable timeout (Section 3.3.3 of ATT [5]).

4.6.7 Read Long Characteristic – by Client

- Test Purpose

  Verify that a Generic Attribute Profile client can read a Long Characteristic Value or Long Characteristic Descriptor by selected handle. The attribute length is unknown to the client and might be long.

- Reference

  [1] 4.8.3, 4.12.2

  [5] 3.4.4.5, 3.4.4.6

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - If the characteristic permissions require a specific security mode and level, execute pairing and/or bonding with the required security mode and level.

- Test Case Configuration

Test Case	Attribute Handle
GATT/CL/GAR/BV-04-C [Read Long Characteristic Value – by Client]	Long Characteristic Value
GATT/CL/GAR/BV-07-C [Read Long Characteristic Descriptor – by Client]	Long Characteristic Descriptor

Table 4.15 Read Long Characteristic – by Client test cases

- Test Procedure

  Send a command from the Upper Tester to the IUT to read a potentially Long Characteristic Value or Long Characteristic Descriptor, as indicated in Table 4.15, from the Lower Tester by specifying the Attribute handle, e.g., GATT Read Long Request(handle) in each of the following steps.

1. The Attribute is long, length m*ATT_MTU – 1 + n octets.

   The Upper Tester will specify the handle with a length of m*ATT_MTU – 1 + n with m >= 1 and 1 <= n < ATT_MTU – 1 contained in the Lower Tester.

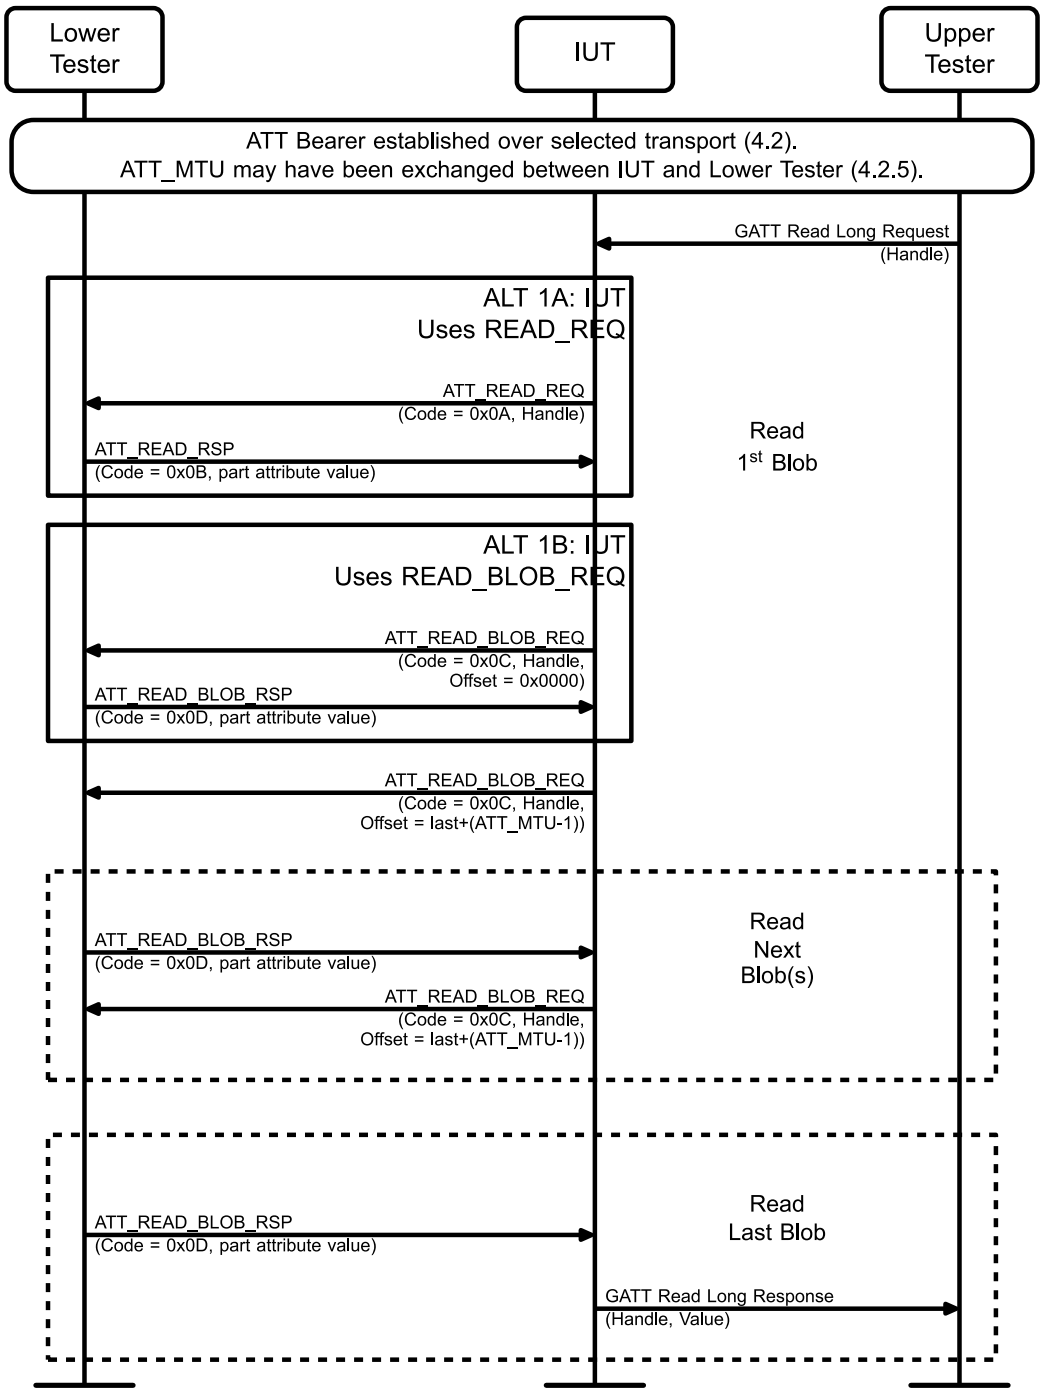


Figure 4.21: Read Long Characteristic – by Client MSC – Step 1

2. The Attribute is long, length m*ATT_MTU – 1 octets.

   The Upper Tester will specify the handle of an Attribute with a length of m*ATT_MTU – 1 with m >= 2 contained in the Lower Tester.

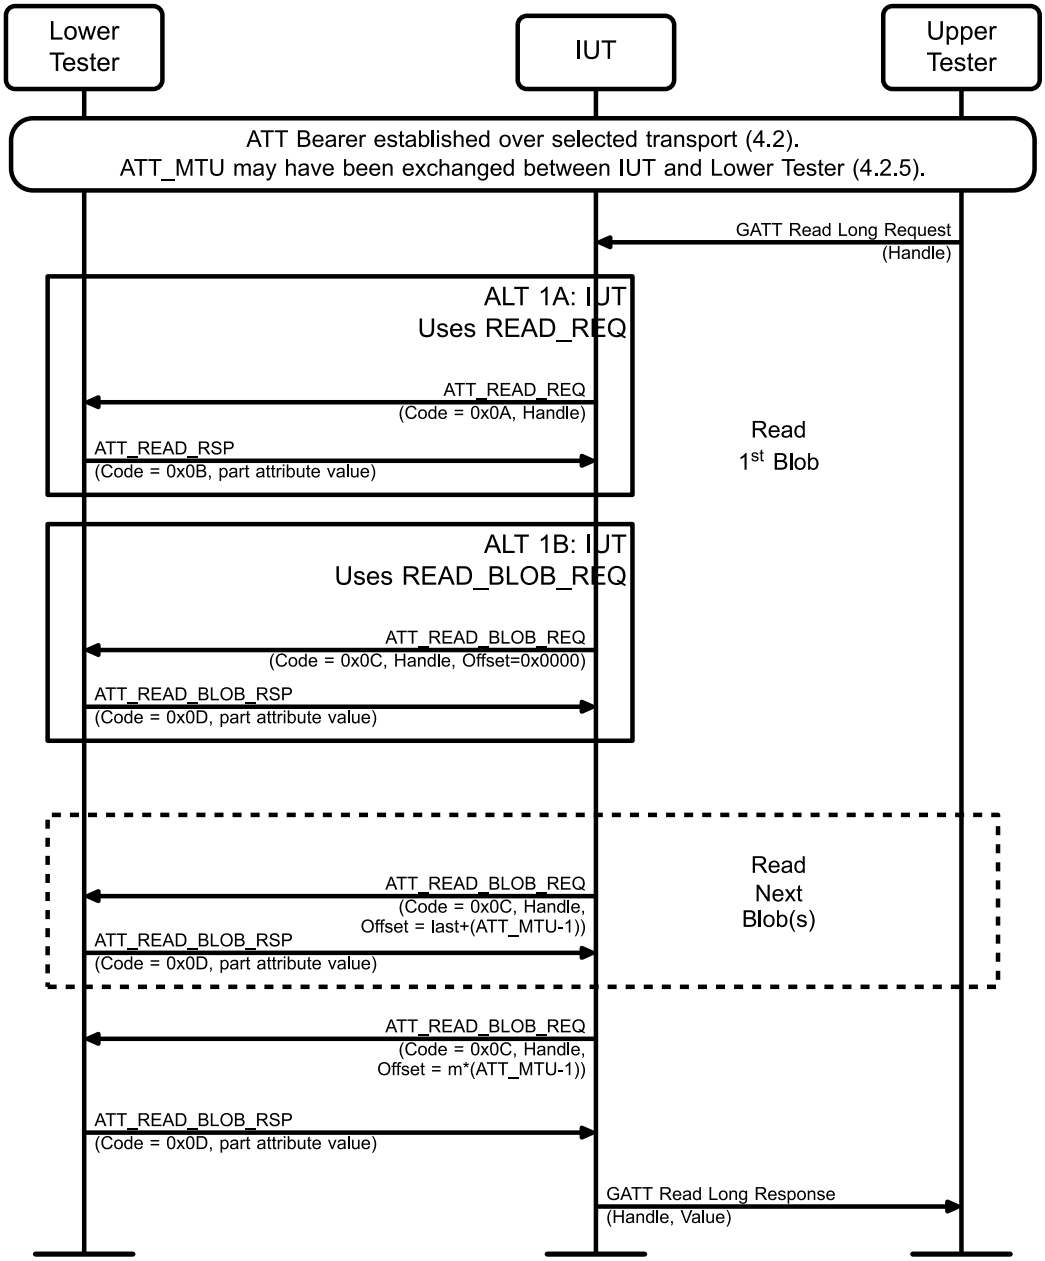


Figure 4.22: Read Long Characteristic – by Client MSC – Step 2

3. The Attribute is short, length ATT_MTU – 1 octets.

   The Upper Tester will specify the handle of an Attribute with a length of ATT_MTU – 1 contained in the Lower Tester.

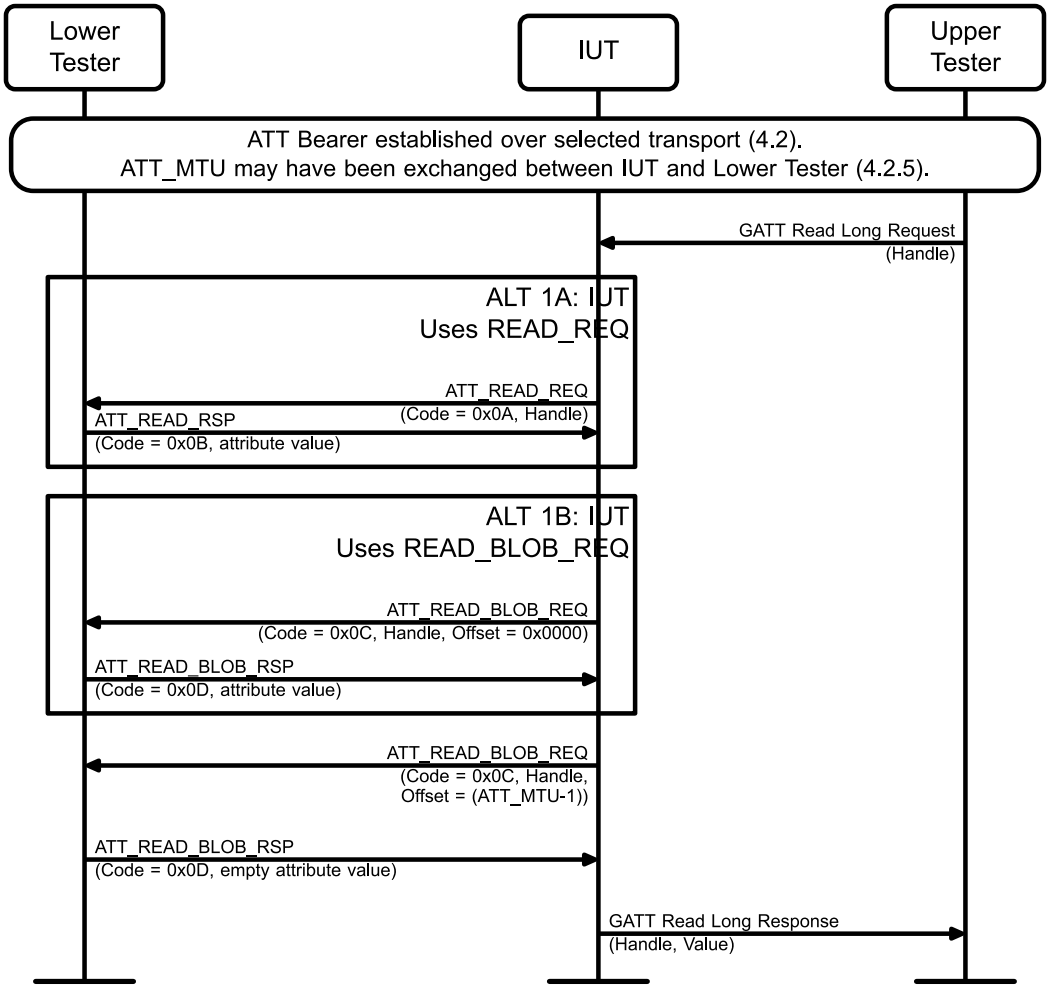


Figure 4.23: Read Long Characteristic – by Client MSC – Step 3

4. Attribute is short, length less than ATT_MTU – 1 octets.

   The Upper Tester will specify the handle of an Attribute with a length less than ATT_MTU – 1 contained in the Lower Tester.

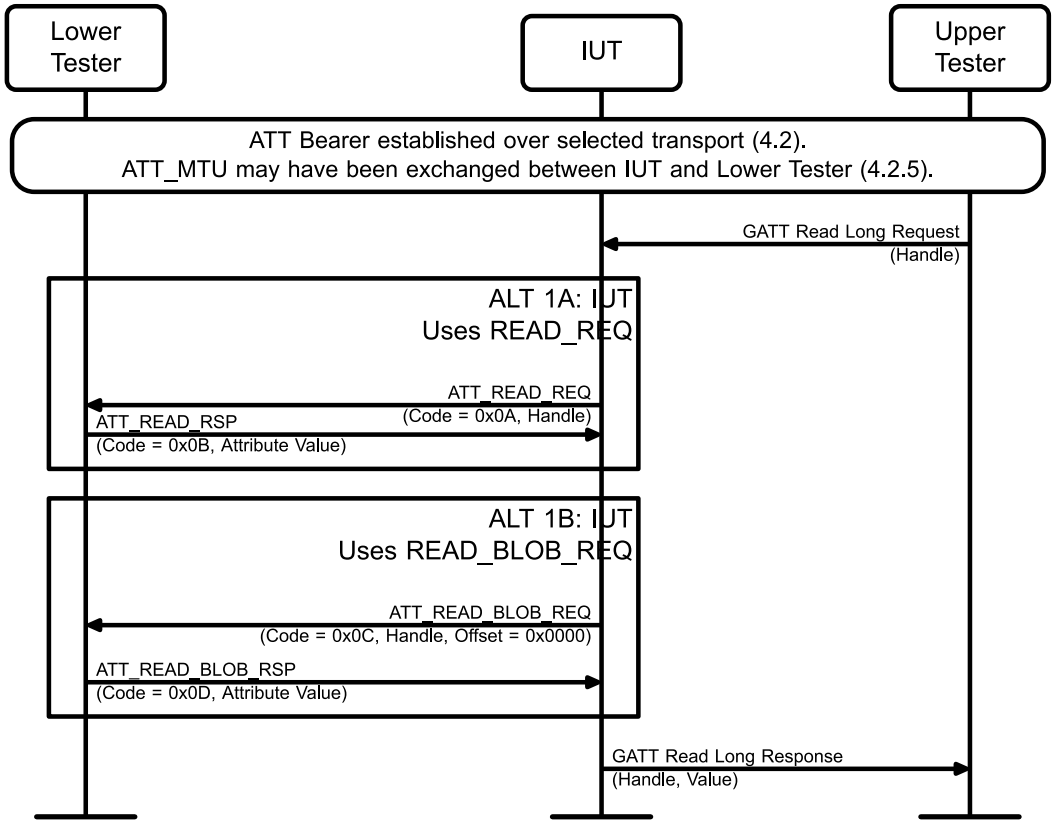


Figure 4.24: Read Long Characteristic – by Client MSC – Step 4

Note: In Steps 3 and 4, the Lower Tester chooses to treat the Characteristic as being of a variable length and thus does not respond with ATT_ERROR_RSP (Attribute Not Long) to an ATT_READ_BLOB_REQ PDU.

Note: It is recommended to execute Steps 1–4 in an arbitrary sequence not known to the IUT.

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_READ_BLOB_REQ PDU (0x0C) to the Lower Tester. Note that the first request may be an ATT_READ_REQ PDU; in that case, the Lower Tester replies with an ATT_READ_RSP PDU, and the IUT detects that the Attribute is long and continues with ATT_READ_BLOB_REQ PDUs.

  The ATT_READ_BLOB_REQ PDU and optional first ATT_READ_REQ PDU specifies the handle of the Attribute to be read and the offset value of the first octet to be read. The offset for the first request is 0x0000; subsequent offset values are sequential values of (ATT_MTU – 1). The IUT detects the end of the long Attribute by the size of the last part attribute value, which is then less than (ATT_MTU – 1).

  The complete Attribute reported to the Upper Tester matches the value reported by the Lower Tester. On detection of the last blob, the IUT reports the complete Attribute to the Upper Tester.

4.6.8 Read Long Characteristic Value – by Client

- Test Purpose

  Verify Generic Attribute Profile client behavior when the Read Long Characteristic Value procedure fails.

- Reference

  [1] 4.8.3

  [5] 3.4.1.1, 3.4.4.5

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.

- Test Case Configuration

Test Case	Additional Initial Condition	Error Code
GATT/CL/GAR/BI-12-C [Read Long Characteristic Value – Read Not Permitted]	A handle of a Characteristic Value in the Lower Tester is selected.	0x02 (Read Not Permitted)
GATT/CL/GAR/BI-13-C [Read Long Characteristic Value – Invalid Offset]	A handle of a Characteristic Value in the Lower Tester that permits reading is selected. The offset is set to a value greater than the length of the selected Characteristic Value.	0x07 (Invalid Offset)
GATT/CL/GAR/BI-14-C [Read Long Characteristic Value – Invalid Handle]	N/A	0x01 (Invalid Handle)
GATT/CL/GAR/BI-15-C [Read Long Characteristic Value – Insufficient Authorization]	A handle of a Characteristic Value in the Lower Tester that requires read authorization is selected. No authorization procedure has been performed between the IUT and the Lower Tester.	0x08 (Insufficient Authorization)
GATT/CL/GAR/BI-16-C [Read Long Characteristic Value – Insufficient Authentication]	A handle of a Characteristic Value in the Lower Tester that requires read authentication is selected. No authentication procedure has been performed between the IUT and the Lower Tester.	0x05 (Insufficient Authentication)
GATT/CL/GAR/BI-17-C [Read Long Characteristic Value – Insufficient Encryption Key Size]	A preamble procedure defined in Section 4.2.4 is used to set up an encrypted link. A handle of a Characteristic Value in the Lower Tester that requires encryption with a key longer than the key used to establish the encrypted link is selected.	0x0C (Encryption Key Size Too Short)

Table 4.16: Read Long Characteristic Value – by Client test cases

- Test Procedure

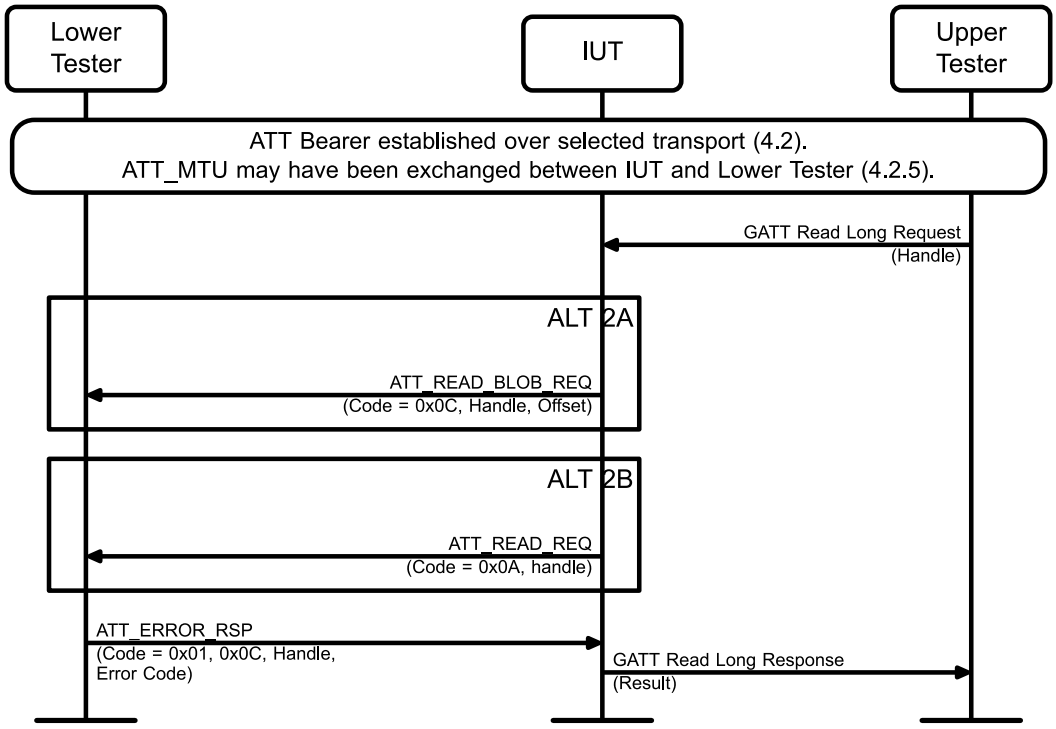


Figure 4.25: Read Long Characteristic Value – by Client MSC

1. The Upper Tester sends a GATT command to the IUT to Read Long Characteristic Value, e.g., GATT Read Long Request(Handle).
2. Perform either alternative 2A or 2B.
   Alternative 2A:
   2A.1 The IUT sends a correctly formatted ATT_READ_BLOB_REQ PDU to the Lower Tester, with Offset = 0x0000, unless specified otherwise in Table 4.16.
   Alternative 2B:
   2B.1 The IUT sends a correctly formatted ATT_READ_REQ PDU to the Lower Tester.
3. The Lower Tester sends an ATT_ERROR_RSP PDU, which contains the error code indicated in Table 4.16, column Error Code.
4. The IUT sends the result to the Upper Tester, e.g., GATT Read Long Response(Result).

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_READ_BY_TYPE_REQ PDU (0x08) or ATT_READ_REQ PDU (0x0A) to the Lower Tester.

  Upon receiving an ATT_ERROR_RSP PDU from the Lower Tester, the IUT sends the result to the Upper Tester, e.g., GATT Read Long Response.

4.6.9 Read Long Characteristic – from Server

- Test Purpose

  Verify that a Generic Attribute Profile server can support reading a Long Characteristic Value or a Long Characteristic Descriptor selected by handle.

- Reference

  [1] 4.8.3, 4.12.2

  [5] 3.4.4.5, 3.4.4.6

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The Lower Tester has the necessary security permissions to read the value of the Characteristic from the IUT.
  - The IUT contains at least one valid Long Characteristic or Long Characteristic Descriptor, and the handle of this Characteristic is known to the test system from Discovery (Section 4.5).

- Test Case Configuration

Test Case	Attribute Handle
GATT/SR/GAR/BV-04-C [Read Long Characteristic Value – from Server]	Long Characteristic Value
GATT/SR/GAR/BV-07-C [Read Long Characteristic Descriptor – from Server]	Long Characteristic Descriptor

Table 4.17: Read Long Characteristic – from Server test cases

- Test Procedure

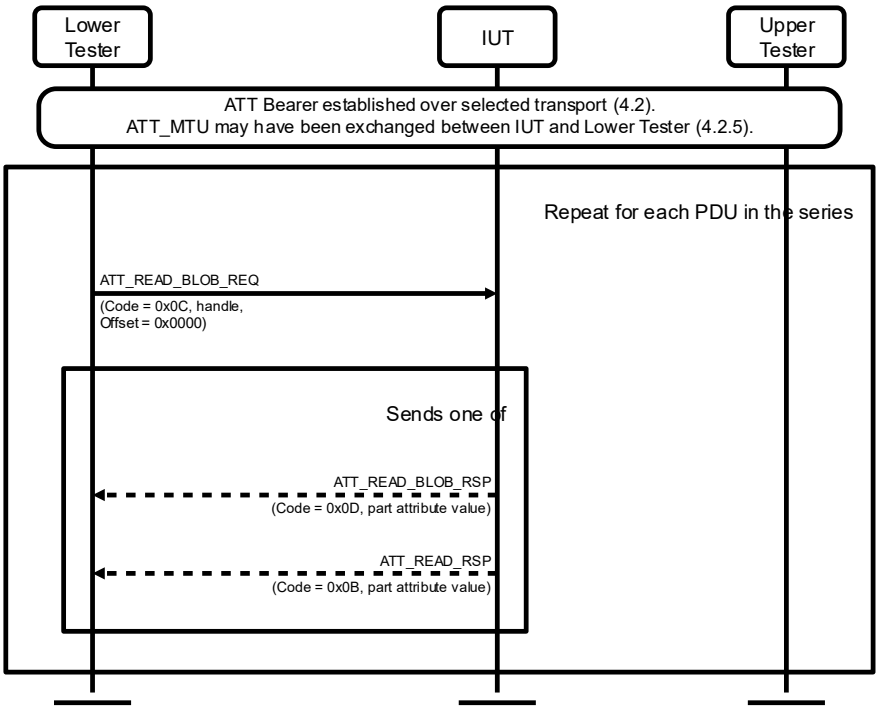


Figure 4.26: Read Long Characteristic – from Server MSC

1. The Lower Tester sends a series of ATT_READ_BLOB_REQ (Handle, Offset) PDUs to the IUT using the handle for an Attribute as indicated in Table 4.17.
2. For each PDU sent by the Lower Tester, the IUT sends correctly formatted ATT_READ_BLOB_RSP or ATT_READ_RSP PDUs to the Lower Tester, with all parts of the attribute value.

- Expected Outcome

  Pass verdict

  The IUT sends correctly formatted ATT_READ_BLOB_RSP PDUs (0x0D) or ATT_READ_RSP PDUs (0x0B) to the Lower Tester. The responses contain all parts of the Value or, respectively, Descriptor of the Long Characteristic that has been read.

  If the Lower Tester sends an ATT_READ_BLOB_REQ PDU with the offset greater than the length of the Characteristic Value or, respectively, Descriptor, then the IUT sends an ATT_READ_BLOB_RSP PDU with a part attribute value of length 0 to the Lower Tester. If the value offset of the ATT_READ_BLOB_REQ PDU is equal to the length of the attribute value, then the length of the part attribute value in the response is zero.

  Each response does not exceed any negotiated ATT_MTU.

  Each IUT response occurs within the applicable timeout (Section 3.3.3 of ATT [5]).

4.6.10 Read Long Characteristic Value – from Server

- Test Purpose

  Verify the behavior of a Generic Attribute Profile server when executing a Read Long Characteristic Value Request procedure.

- Reference

  [1] 4.8.3

  [5] 3.4.1.1, 3.4.4.5

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.

- Test Case Configuration

Test Case	Additional Initial Condition	Error Code
GATT/SR/GAR/BI-12-C [Read Long Characteristic Value – Read Not Permitted Response]	A handle of a Long Characteristic Value in the Lower Tester is selected.	0x02 (Read Not Permitted)
GATT/SR/GAR/BI-13-C [Read Long Characteristic Value – Invalid Offset Response]	A handle of a Long Characteristic Value in the Lower Tester that permits reading is selected. The offset is set to a value greater than the length of the selected Characteristic Value.	0x07 (Invalid Offset)
GATT/SR/GAR/BI-14-C [Read Long Characteristic Value – Invalid Handle Response]	N/A	0x01 (Invalid Handle)
GATT/SR/GAR/BI-15-C [Read Long Characteristic Value – Insufficient Authorization]	A handle of a Long Characteristic Value in the Lower Tester that requires read authorization is selected. No authorization procedure has been performed.	0x08 (Insufficient Authorization)
GATT/SR/GAR/BI-16-C [Read Long Characteristic Value – Insufficient Authentication]	A handle of a Long Characteristic Value in the Lower Tester that requires read authentication is selected. No authentication procedure has been performed.	0x05 (Insufficient Authentication)
GATT/SR/GAR/BI-17-C [Read Long Characteristic Value – Insufficient Encryption Key Size]	A preamble procedure defined in Section 4.2.4 is used to set up an encrypted link. A handle of a Long Characteristic Value in the Lower Tester that requires encryption with a key longer than the key used to establish the encrypted link is selected.	0x0C (Encryption Key Size Too Short)

Table 4.18: Read Long Characteristic Value – from Server test cases

- Test Procedure

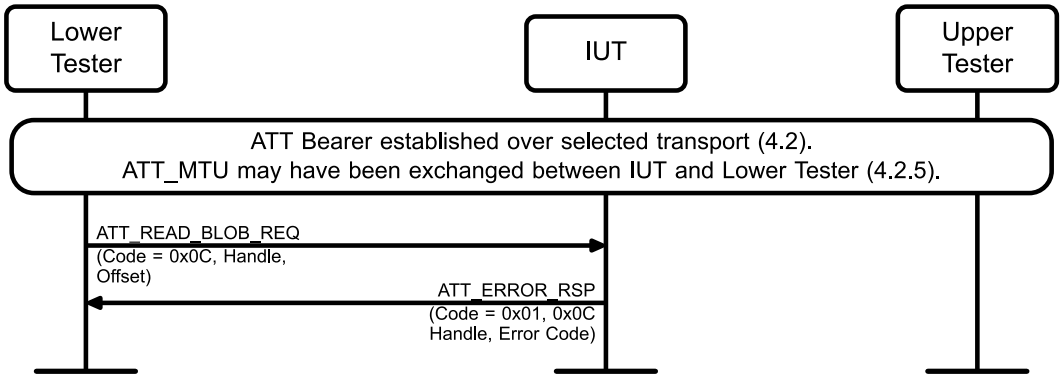


Figure 4.27: Read Long Characteristic Value – from Server MSC

1. The Lower Tester sends an ATT_READ_BLOB_REQ PDU to the IUT, with the selected Handle and Offset.
2. The IUT sends an ATT_ERROR_RSP PDU, with the error code indicated in Table 4.18, column Error Code.

- Expected Outcome

  Pass verdict

  The IUT sends an ATT_ERROR_RSP PDU (code 0x01) to the Lower Tester. The Request Opcode in Error parameter is set to 0x0C. The Attribute Handle in Error parameter is set to the handle sent by the Lower Tester. The Error code is set as indicated in Table 4.18, column Error Code.

  The IUT responds within the applicable timeout (Section 3.3.3 of ATT [5]).

GATT/CL/GAR/BV-05-C [Read Multiple Characteristic Values – by Client]

- Test Purpose

  Verify that a Generic Attribute Profile client can read multiple Characteristic Values selected by a set of handles.

- Reference

  [1] 4.8.4

  [5] 3.4.4.7, 3.4.4.8

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A set of at least two handles of Characteristic Values in the Lower Tester that permit reading is selected. The combined length of the set of Characteristic Values is less than (ATT_MTU – 1).
  - If the characteristics permissions require a specific security mode and level, execute pairing and/or bonding with the required security mode and level.

- Test Procedure

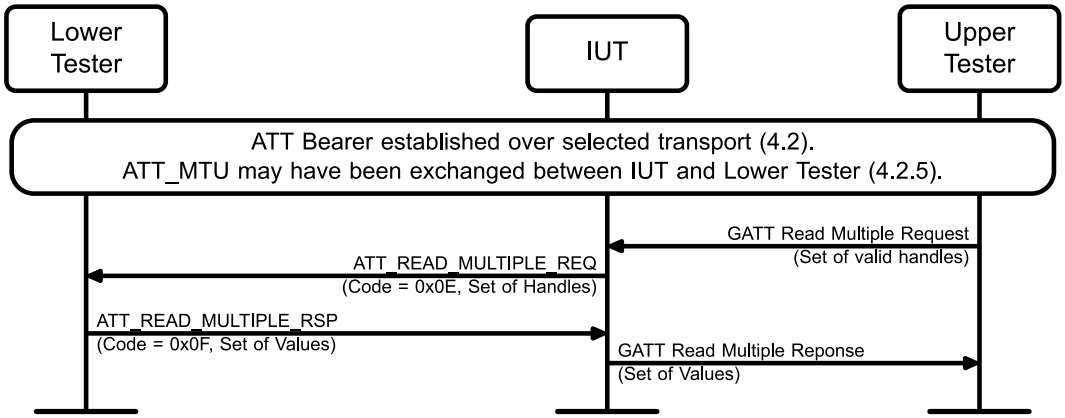


Figure 4.28: GATT/CL/GAR/BV-05-C [Read Multiple Characteristic Values – by Client] MSC

1. The Upper Tester sends a GATT command to the IUT to initiate the test, e.g., GATT Read Multiple Request(Set of Handles).
2. The IUT sends a correctly formatted ATT_READ_MULTIPLE_REQ or ATT_READ_REQ PDU to the Lower Tester.
3. The Lower Tester sends an ATT_READ_MULTIPLE_RSP PDU, which contains the set of values.
4. The IUT sends the result to the Upper Tester, e.g., GATT Read Multiple Response(Set of Values).

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_READ_MULTIPLE_REQ (0x0E) to the Lower Tester.

  The characteristic handles are set to valid handles delivered by the Upper Tester.

  The IUT receives the ATT_READ_MULTIPLE_RSP (0x0F) sent by the Lower Tester.

  The IUT sends the received responses to the Upper Tester, e.g., GATT Read Multiple Response with the same set of values reported by the Lower Tester.

4.6.11 Read Multiple Characteristic Values Rejected – by Client

- Test Purpose

  Verify Generic Attribute Profile client behavior when the Read Long Characteristic Value procedure fails.

- Reference

  [1] 4.8.3

  [5] 3.4.1.1, 3.4.4.7

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.

- Test Case Configuration

Test Case	Additional Initial Condition	Error Code
GATT/CL/GAR/BI-18-C [Read Multiple Characteristic Values – Read Not Permitted]	A set of at least two handles of Characteristic Values in the Lower Tester is selected.	0x02 (Read Not Permitted)
GATT/CL/GAR/BI-19-C [Read Multiple Characteristic Values – Invalid Handle]	N/A	0x01 (Invalid Handle)
GATT/CL/GAR/BI-20-C [Read Multiple Characteristic Values – Insufficient Authorization]	A set of at least two handles of Characteristic Values in the Lower Tester, one of which requires read authorization, is selected. No authorization procedure has been performed.	0x08 (Insufficient Authorization)
GATT/CL/GAR/BI-21-C [Read Multiple Characteristic Values – Insufficient Authentication]	A set of at least two handles of Characteristic Values in the Lower Tester, one of which requires read authentication, is selected. No authentication procedure has been performed.	0x05 (Insufficient Authentication)
GATT/CL/GAR/BI-22-C [Read Multiple Characteristic Values – Insufficient Encryption Key Size]	A preamble procedure defined in Section 4.2.4 is used to set up an encrypted link. A set of at least two handles of Characteristic Values in the Lower Tester, one of which requires encryption with a key longer than the key used to establish the encrypted link, is selected.	0x0C (Encryption Key Size Too Short)

Table 4.19: Read Multiple Characteristic Values Rejected – by Client test cases

- Test Procedure

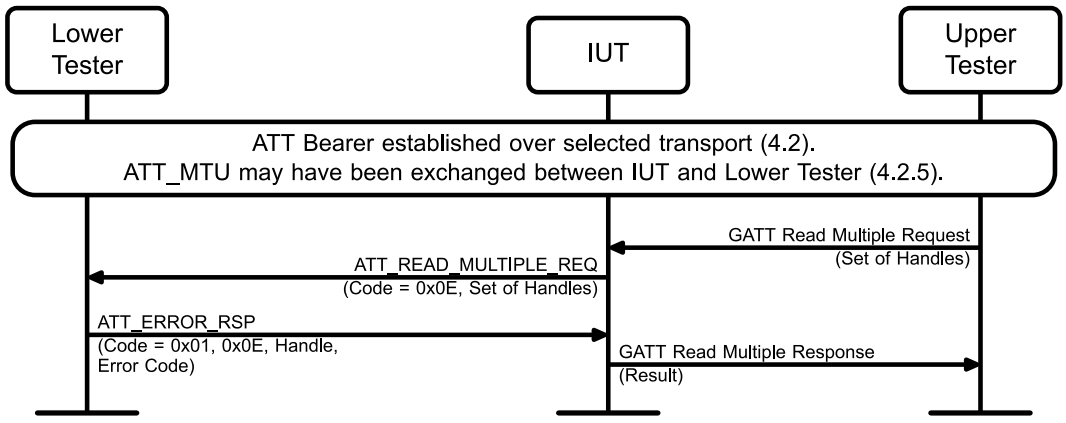


Figure 4.29: Read Multiple Characteristic Values Rejected – by Client MSC

1. The Upper Tester sends a GATT command to the IUT to initiate the test, e.g., GATT Read Multiple Request(Set of Handles).
2. The IUT sends an ATT_READ_MULTIPLE_REQ PDU to the Lower Tester.

3. The Lower Tester sends an ATT_ERROR_RSP PDU, which contains the error code indicated in Table 4.19, column Error Code.
4. The IUT sends the result to the Upper Tester, e.g., GATT Read Multiple Response(Result).

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends a correctly formatted ATT_READ_MULTIPLE_REQ PDU (0x0E) to the Lower Tester.

  Upon receiving an ATT_ERROR_RSP PDU from the Lower Tester, the IUT sends the result to the Upper Tester, e.g., GATT Read Multiple Response.

GATT/SR/GAR/BV-05-C [Read Multiple Characteristic Values – from Server]

- Test Purpose

  Verify that a Generic Attribute Profile server can support reading multiple Characteristic Values selected by a set of handles.

- Reference

  [1] 4.8.4

  [5] 3.4.4.7, 3.4.4.8

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A set of at two handles of Characteristic Values in the IUT that permit reading is selected.
  - The Lower Tester has the necessary security permissions from the IUT to read the characteristics.

- Test Procedure

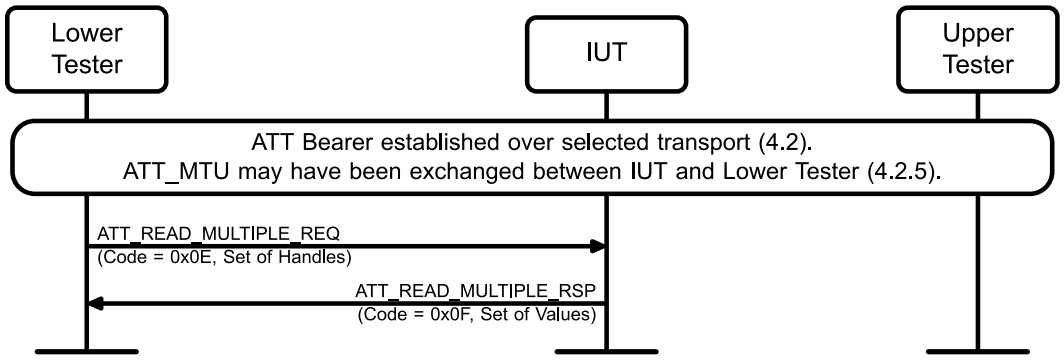


Figure 4.30: GATT/SR/GAR/BV-05-C [Read Multiple Characteristic Values – from Server] MSC

1. The Lower Tester sends an ATT_READ_MULTIPLE_REQ (0x0E) to the IUT, with the selected Handle and Offset.
2. The IUT sends a correctly formatted ATT_READ_MULTIPLE_RSP (0x0F) to the Lower Tester.

- Expected Outcome

  Pass verdict

  The IUT sends ATT_READ_MULTIPLE_RSP (0x0F) to the Lower Tester.

  The Characteristic Values are set to the values of the characteristics selected by the set of handles in the ATT_READ_MULTIPLE_REQ.

  The response size does not exceed any negotiated ATT_MTU. If the combined length of the Characteristic Values are longer than (ATT_MTU – 1) then the first (ATT_MTU – 1) octets are included in this response.

  The IUT responds within the applicable timeout (Section 3.3.3 of ATT [5]).

4.6.12 Rejecting Read Multiple Characteristic Values – from Server

- Test Purpose

  Verify the behavior of a Generic Attribute Profile server when executing a Read Multiple Characteristic Values Request procedure.

- Reference

  [1] 4.8.3

  [5] 3.4.1.1, 3.4.4.5

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.

- Test Case Configuration

Test Case	Additional Initial Condition	Error Code
GATT/SR/GAR/BI-18-C [Read Multiple Characteristic Values – Read Not Permitted]	A set of at two handles of Characteristic Values in the IUT, one of which does not permit reading, is selected.	0x02 (Read Not Permitted)
GATT/SR/GAR/BI-19-C [Read Multiple Characteristic Values – Invalid Handle]	The Lower Tester selects a set of two handles, one of which is known to be invalid.	0x01 (Invalid Handle)
GATT/SR/GAR/BI-20-C [Read Multiple Characteristic Values – Insufficient Authorization]	A set of two handles of Characteristic Values in the IUT, one of which requires read authorization, is selected. No authorization procedure has been performed between the IUT and the Lower Tester.	0x08 (Insufficient Authorization)
GATT/SR/GAR/BI-21-C [Read Multiple Characteristic Values – Insufficient Authentication]	A set of at least two handles of Characteristic Values in the IUT, one of which requires read authentication, is selected. No authentication procedure has been performed between the IUT and the Lower Tester.	0x05 (Insufficient Authentication)

Test Case	Additional Initial Condition	Error Code
GATT/SR/GAR/BI-22-C [Read Multiple Characteristic Values – Insufficient Encryption Key Size]	A preamble procedure defined in Section 4.2.4 is used to set up an encrypted link. A set of at least two handles of Characteristic Values in the IUT, one of which requires encryption with a key longer than the key used to establish the encrypted link, is selected.	0x0C (Encryption Key Size Too Short)

Table 4.20: Rejecting Read Multiple Characteristic Values – from Server test cases

- Test Procedure

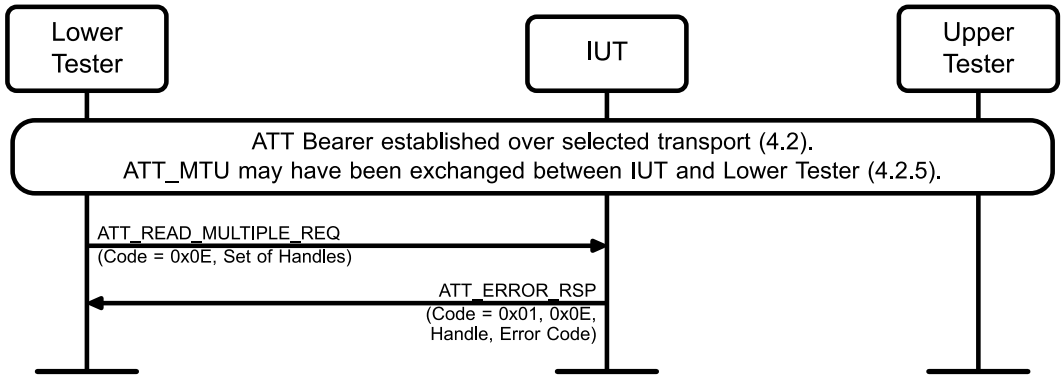


Figure 4.31: Rejecting Read Multiple Characteristic Values – from Server MSC

1. The Lower Tester sends an ATT_READ_MULTIPLE_REQ PDU to the IUT, with the selected Handle and Offset.
2. The IUT sends an ATT_ERROR_RSP PDU, with the error code indicated in Table 4.20, column Error Code.

- Expected Outcome

  Pass verdict

  The IUT sends an ATT_ERROR_RSP PDU (code 0x01) to the Lower Tester. The Request Opcode in Error parameter is set to 0x0E. The Attribute Handle in Error parameter is set to the handle sent by the Lower Tester. The Error code is set as indicated in Table 4.20, column Error Code.

  The IUT responds within the applicable timeout (Section 3.3.3 of ATT [5]).

4.6.13 Read Characteristic Value – Invalid Transport Access – by Client

- Test Purpose

  Verify Generic Attribute Profile client behavior when an attempt is made to use BR/EDR or LE transport to execute the Read Characteristic Value procedure on a characteristic contained within a service defined for use only over LE or, respectively, BR/EDR transport.

- Reference

  [1] 4.4, 4.8.1

  [5] 3.4.1.1, 3.4.4.3

- Initial Condition
  - A preamble procedure defined as indicated in Table 4.21 is used to set up the transport and L2CAP channel.
  - The Lower Tester is a BR/EDR/LE device.
  - The Lower Tester implements a GATT-based service defined as indicated in Table 4.21. That GATT-based profile contains a readable characteristic. The handle of that characteristic is available to the Upper Tester.
- Test Case Configuration

Test Case	Established transport	Transport for GATT-based service
GATT/CL/GAR/BI-34-C [Read Characteristic Value – Invalid Transport Access over BR/EDR]	BR/EDR (4.2.1.1)	LE
GATT/CL/GAR/BI-35-C [Read Characteristic Value – Invalid Transport Access over LE]	LE (4.2.1.2)	BR/EDR

Table 4.21: Read Characteristic Value – Invalid Transport Access – by Client test cases

- Test Procedure

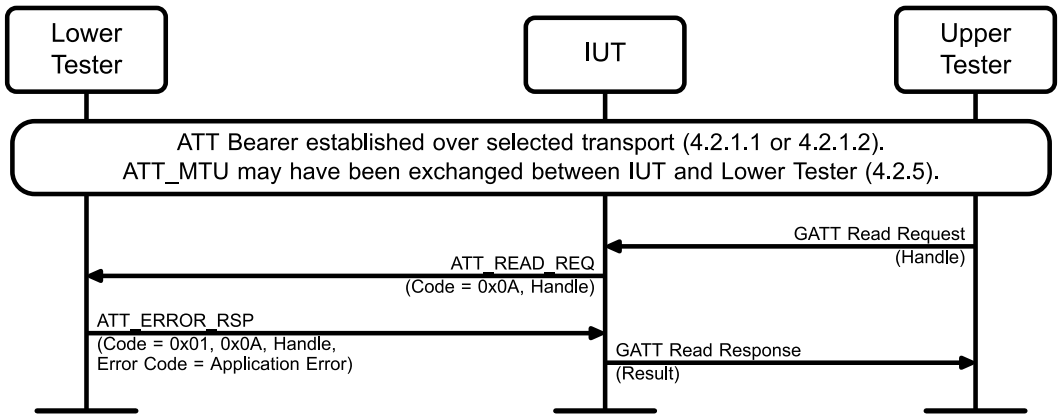


Figure 4.32: Read Characteristic Value – Invalid Transport Access – by Client MSC

1. The Upper Tester sends a command to the IUT to initiate the test, e.g., GATT Read Request(Handle); the Upper Tester provides the handle of the characteristic contained within the GATT-based service defined of use in the transport indicated in Table 4.21.
2. The IUT sends a correctly formatted ATT_READ_REQ PDU to the Lower Tester.
3. The Lower Tester sends an ATT_ERROR_RSP PDU, which contains an “Application Error” error code.
4. The IUT sends the result to the Upper Tester, e.g., GATT Read Response(Result).

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_READ_REQ PDU to the Lower Tester, including the handle specified by the Upper Tester.

  Upon receiving an ATT_ERROR_RSP PDU from the Lower Tester containing an “Application Error”, the IUT sends the result to the Upper Tester, e.g., GATT Read Response.

GATT/SR/GAR/BV-08-C [Read Behind Long Characteristic Descriptor – from Server]

- Test Purpose

  Verify that a Generic Attribute Profile server returns a 0-length part value when reading a Long Characteristic Descriptor selected by handle with an offset equal to the length of the Long Characteristic Value.

- Reference

  [1] 4.12.2.

  [5] 3.4.4.5, 3.4.4.6

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The IUT contains at least one valid Long Characteristic, and the handle of this Characteristic is known to the test system from Discovery (Section 4.5).
  - The Lower Tester has the necessary security permissions to read the value of the Characteristic Descriptor from the IUT.

- Test Procedure

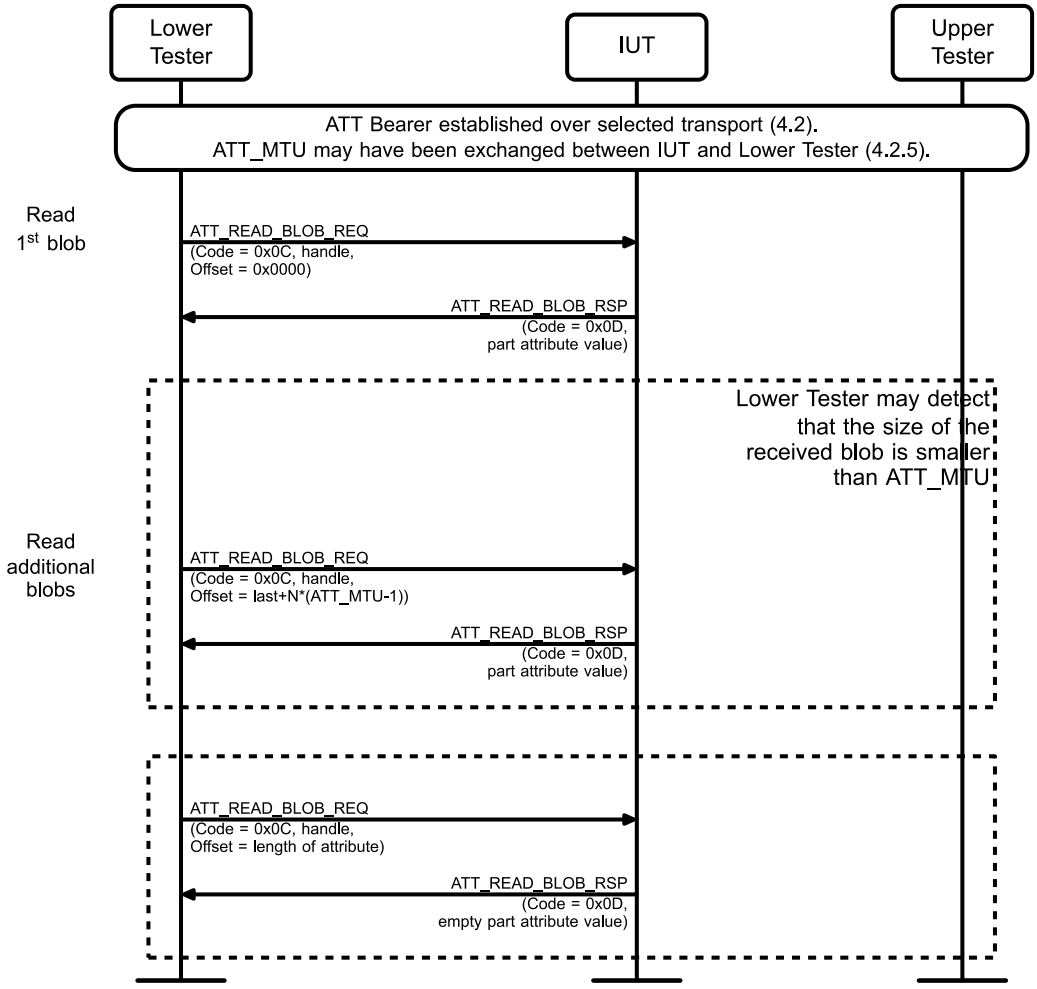


Figure 4.33: GATT/SR/GAR/BV-08-C [Read Behind Long Characteristic Descriptor - from Server] MSC

1. The Lower Tester sends a series of ATT_READ_BLOB_REQ(handle, offset) PDUs to the IUT to read all parts of the value of a Long Characteristic Descriptor.
2. When the size of the part attribute value in the received ATT_READ_BLOB_REQ PDU is shorter than ATT_MTU – 1, the Lower Tester calculates the length of the Characteristic Value and sends an ATT_READ_BLOB_REQ PDU with the offset set to that length.

- Expected Outcome

  Pass verdict

  The IUT sends correctly formatted ATT_READ_BLOB_RSP (0x0D) or ATT_READ_REQ PDUs to the Lower Tester.

  The responses contain all parts of the value of the Long Characteristic Descriptor.

  The ATT_READ_BLOB_RSP PDU (0x0D) to the last ATT_READ_BLOB_REQ PDU contains a 0-length part attribute value.

  Each response does not exceed any negotiated ATT_MTU.

  Each IUT response occurs within the applicable timeout (Section 3.3.3 of ATT [5]).

4.6.14 Read Characteristic Value – Invalid Transport Access – from Server

- Test Purpose

  Verify that a Generic Attribute Profile server can detect and reject a Read Characteristic Value Request, delivered over one transport, to a readable Characteristic Value included in a service defined only over a different transport, and issue an Application Error Response.

- Reference

  [1] 4.4, 4.8.1

  [5] 3.4.1.1, 3.4.4.3

- Initial Condition

  - A preamble procedure defined as indicated in Table 4.22 is used to set up the transport and L2CAP channel.
  - The Lower Tester is a BR/EDR/LE device.
  - The Lower Tester implements a GATT-based service defined as indicated in Table 4.22. That GATT-based profile contains a readable characteristic. The handle of that characteristic is available to the Upper Tester.

- Test Case Configuration

Test Case	Established transport	Transport for GATT-based service
GATT/SR/GAR/BI-34-C [Read Characteristic Value – Invalid Transport Access over LE]	LE (4.2.1.2)	BR/EDR
GATT/SR/GAR/BI-35-C [Read Characteristic Value – Invalid Transport Access over BR/EDR]	BR/EDR (4.2.1.1)	LE

Table 4.22: Read Characteristic Value – Invalid Transport Access - from Server test cases

- Test Procedure

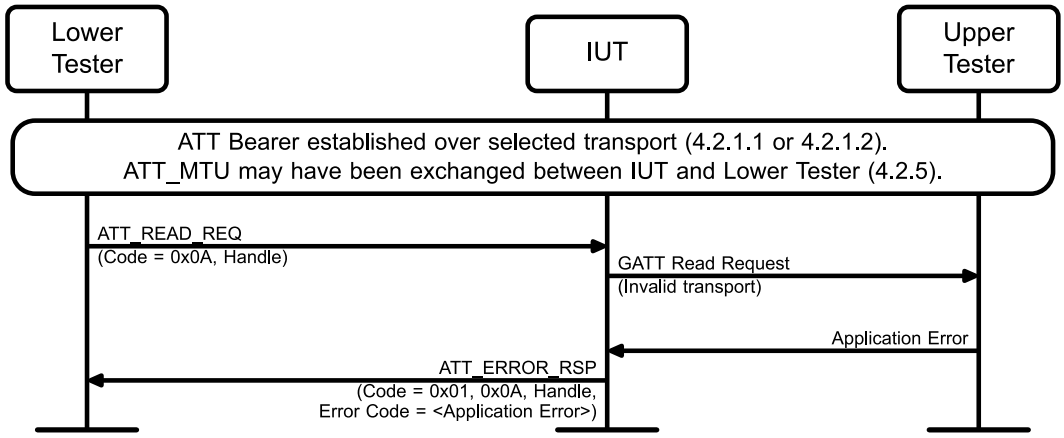


Figure 4.34: Read Characteristic Value – Invalid Transport Access – from Server MSC

1. The Lower Tester sends an ATT_READ_REQ PDU to the IUT using the selected handle, over the transport indicated in Table 4.22.
2. The IUT sends a request to the Upper Tester to read the selected handle, e.g., GATT Read Request.

3. The Upper Tester sends an “Application Error” response to the IUT.
4. The IUT sends an ATT_ERROR_RSP PDU to the Lower Tester, which contains an “Application Error” error code.

- Expected Outcome

  Pass verdict

  The IUT sends an ATT_ERROR_RSP (code 0x01) PDU to the Lower Tester. The Request Opcode in Error parameter is set to 0x0A. The Attribute Handle in Error parameter is set to the handle sent by the Lower Tester. The Error Code is set to an <Application Error> code as defined in Section 3.3 of ATT [5].

  The IUT responds within the applicable timeout (Section 3.3.3 of ATT [5]).

GATT/CL/GAR/BV-08-C [Read Multiple Variable Length Characteristic Values – by Client]

- Test Purpose

  Verify that a Generic Attribute Profile client can read multiple values of a set of attributes that have a variable or unknown value length, selected by a set of handles.

- Reference

  [11] 4.8.5

  [12] 3.4.4.11, 3.4.4.12

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A set of at least two handles of Characteristic Values in the Lower Tester that permit reading is selected. The combined length of the set of Characteristic Values is less than (MTU_{L2CAP} - 1).

- Test Procedure

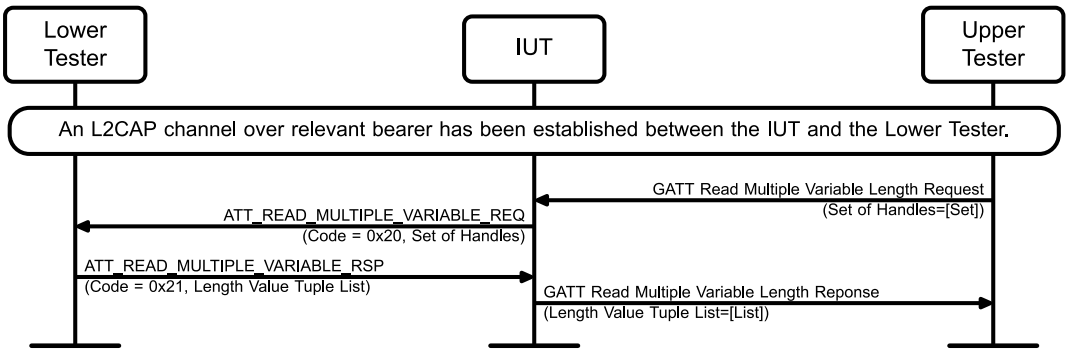


Figure 4.35: GATT/CL/GAR/BV-08-C [Read Multiple Variable Length Characteristic Values – by Client] MSC

1. The Upper Tester sends a command to the IUT to read a set of Characteristic Values selected by a set of handles, e.g., GATT Read Multiple Variable Length Request.
2. The IUT sends a correctly formatted ATT_READ_MULTIPLE_VARIABLE_REQ (Code = 0x20) PDU to the Lower Tester.

3. The Lower Tester sends an ATT_READ_MULTIPLE_VARIABLE_RSP (Code = 0x21) PDU to the IUT, with the length and value of the requested characteristics.
4. The IUT sends the received responses to the Upper Tester, e.g., GATT Read Multiple Variable Length Response, with the same data reported by the Lower Tester in Step 3.

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_READ_MULTIPLE_VARIABLE_REQ to the Lower Tester.

  The Set Of Handles parameter is set to the list of valid handles specified by the Upper Tester.

  The IUT receives the ATT_READ_MULTIPLE_VARIABLE_RSP sent by the Lower Tester.

  The IUT sends the received responses to the Upper Tester, e.g., GATT Read Multiple Variable Length Response with the same set of length and values reported by the Lower Tester.

4.6.15 Read Multiple Variable Length Characteristic Values over multiple bearers – by Client

- Test Purpose

  Verify that a Generic Attribute Profile client can set up multiple bearers and read multiple values of a set of attributes that have a variable or unknown value length, selected by a set of handles, through each channel, multiplexed.

- Reference

  [11] 4.8.5

  [12] 3.4.4.11, 3.4.4.12

- Initial Condition

  - The Lower Tester sets the EATT Supported bit set to 1 in the Server Supported Features characteristic.
  - A preamble procedure defined in Section 4.2.1.3 or, respectively, Section 4.2.1.4 is used to set up the transport and at least two L2CAP channels.
  - A preamble procedure defined in Section 4.2.3.2 is used to inform the Lower Tester that the IUT supports the Enhanced ATT bearer feature.
  - Two sets of at least two handles of Characteristic Values each in the IUT that permit reading are selected.

- Test Case Configuration

Test Case	Bearer
GATT/CL/GAR/BV-10-C	Unenhanced ATT + EATT
GATT/CL/GAR/BV-11-C	EATT

Table 4.23: Read Multiple Variable Length Characteristic Values over multiple bearers – by Client test cases

- Test Procedure

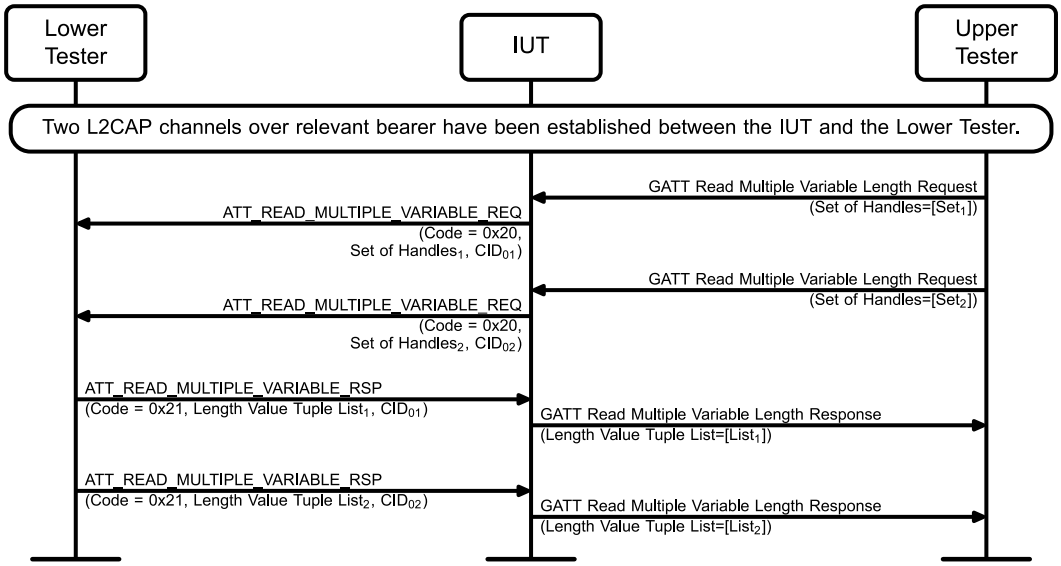


Figure 4.36: Read Multiple Variable Length Characteristic Values over multiple bearers – by Client MSC

1. The Upper Tester sends a command to the IUT to read a set of Characteristic Values selected by a set of handles, e.g., GATT Read Multiple Variable Length Request.
2. The IUT sends a correctly formatted ATT_READ_MULTIPLE_VARIABLE_REQ (Code = 0x20) PDU to the Lower Tester on a first CID.
3. The Upper Tester sends a second command to the IUT to read a second set of Characteristic Values selected by a second set of handles, e.g., GATT Read Multiple Variable Length Request, on the second channel.
4. The IUT sends a second correctly formatted ATT_READ_MULTIPLE_VARIABLE_REQ PDU to the Lower Tester, on the second L2CAP CID.
5. The Lower Tester sends an ATT_READ_MULTIPLE_VARIABLE_RSP (Code = 0x21) PDU to the IUT, with the length and value of the characteristics requested in Step 2, on the first CID.
6. The IUT sends the received response to the Upper Tester, e.g., GATT Read Multiple Variable Length Response, with the same set of data reported by the Lower Tester.
7. The Lower Tester sends an ATT_READ_MULTIPLE_VARIABLE_RSP PDU to the IUT, corresponding to the second request (in Step 4) with the length and value of the requested characteristics, on the second CID.
8. The IUT sends the received response to the Upper Tester, e.g., GATT Read Multiple Variable Length Response, with the same set of data reported by the Lower Tester.

- Expected Outcome

  Pass verdict

  The IUT sends two correctly formatted ATT_READ_MULTIPLE_VARIABLE_REQ PDUs to the Lower Tester.

  The Set Of Handles parameter is set to the list of valid handles specified by the Upper Tester, for each PDU the IUT sends.

  The IUT receives the two ATT_READ_MULTIPLE_VARIABLE_REQ PDUs sent by the Lower Tester.

  The IUT sends the received responses to the Upper Tester, e.g., GATT Read Multiple Variable Length Response with the same set of values reported by the Lower Tester.

- Notes

  A device supporting EATT is not mandatory to support more than one L2CAP channel.

4.6.16 Read Multiple Variable Length Characteristic Values Rejected – by Client

- Test Purpose

  Verify the behavior of a Generic Attribute Profile client when the Read Multiple Variable Length Characteristic Values Request procedure fails.

- Reference

  [11] 4.8.5

  [12] 3.4.1.1, 3.4.4.11

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.

- Test Case Configuration

Test Case	Additional Initial Condition	Error Code
GATT/CL/GAR/BI-36-C [Read Multiple Variable Length Characteristic Values – Read Not Permitted]	A set of at least two handles of Characteristic Values in the Lower Tester are selected.	0x02 (Read Not Permitted)
GATT/CL/GAR/BI-38-C [Read Multiple Variable Length Characteristic Values – Invalid Handle]	N/A	0x01 (Invalid Handle)
GATT/CL/GAR/BI-40-C [Read Multiple Variable Length Characteristic Values – Insufficient Authorization]	A set of at least two handles of Characteristic Values in the Lower Tester, one of which requires read authorization, is selected. No authorization procedure has been performed between the IUT and the Lower Tester.	0x08 (Insufficient Authorization)
GATT/CL/GAR/BI-42-C [Read Multiple Variable Length Characteristic Values – Insufficient Authentication]	A set of at least two handles of Characteristic Values in the Lower Tester, one of which requires read authentication, is selected. No authentication procedure has been performed between the IUT and the Lower Tester.	0x05 (Insufficient Authentication)

Test Case	Additional Initial Condition	Error Code
GATT/CL/GAR/BI-44-C [Read Multiple Variable Length Characteristic Values – Insufficient Encryption Key Size]	A preamble procedure defined in Section 4.2.4 is used to set up an encrypted link. A set of at least two handles of Characteristic Values in the Lower Tester, one of which requires encryption with a key longer than the key used to establish the encrypted link, is selected.	0x0C (Encryption Key Size Too Short)

Table 4.24: Read Multiple Variable Length Characteristic Values Rejected – by Client test cases

- Test Procedure

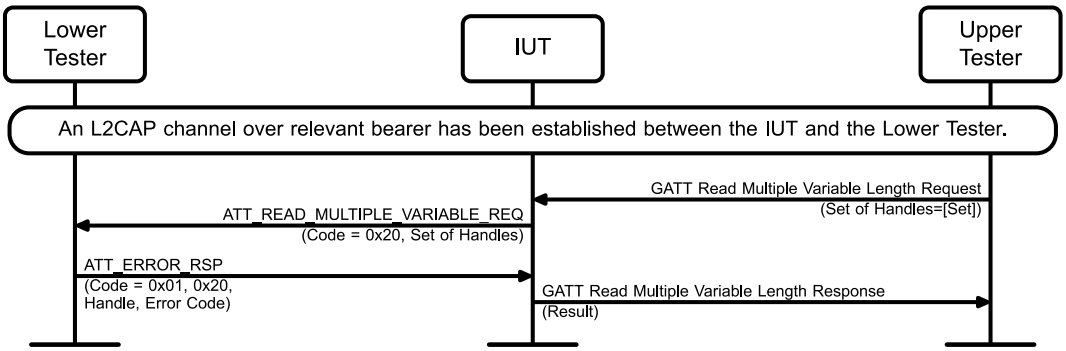


Figure 4.37: Read Multiple Variable Length Characteristic Values Rejected – by Client MSC

1. The Upper Tester sends a command to the IUT to read a set of Characteristic Values selected by a set of handles, e.g., GATT Read Multiple Variable Length Request.
2. The IUT sends an ATT_READ_MULTIPLE_VARIABLE_REQ PDU to the Lower Tester.
3. The Lower Tester sends an ATT_ERROR_RSP PDU with Error Code as indicated in Table 4.24, column Error Code, to the IUT.
4. The IUT sends the result to the Upper Tester, e.g., GATT Read Multiple Variable Length Response.

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_READ_MULTIPLE_VARIABLE_REQ PDU to the Lower Tester.

  Upon receiving an ATT_ERROR_RSP PDU from the Lower Tester, the IUT sends the result to the Upper Tester, e.g., GATT Read Multiple Variable Length Response.

GATT/SR/GAR/BV-09-C [Read Multiple Variable Length Characteristic Values – from Server]

- Test Purpose

  Verify that a Generic Attribute Profile server can support reading multiple values of a set of attributes that have a variable or unknown value length, selected by a set of handles, and return their value.

- Reference

  [11] 4.8.5

  [12] 3.4.4.11, 3.4.4.12

- Initial Condition
  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A set of at least two handles of Characteristic Values in the IUT that permit reading is selected.
- Test Procedure

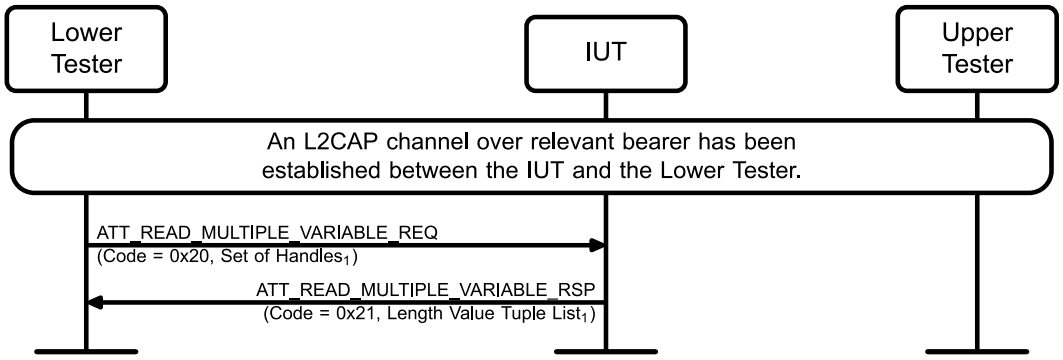


Figure 4.38: GATT/SR/GAR/BV-09-C [Read Multiple Variable Length Characteristic Values – from Server] MSC

1. The Lower Tester sends an ATT_READ_MULTIPLE_VARIABLE_REQ PDU to the IUT using the selected set of handles.
2. The IUT sends an ATT_READ_MULTIPLE_VARIABLE_RSP PDU to the Lower Tester, containing the values of the characteristics selected by the set of handles in Step 1.

- Expected Outcome

  Pass verdict

  The IUT receives an ATT_READ_MULTIPLE_VARIABLE_REQ from the Lower Tester.

  The Length Value Tuple List parameter is set to the list of valid handles specified in the ATT_READ_MULTIPLE_VARIABLE_REQ.

  The response size does not exceed the ATT_MTU. If the combined length of the Characteristic Values is longer than (ATT_MTU – 1), then the first (ATT_MTU – 1) octets are included in this response.

  The IUT responds within the applicable timeout (Section 3.3.3 of ATT [5]).

4.6.17 Read Multiple Variable Length Characteristic Values over multiple bearers – from Server

- Test Purpose

  Verify that a Generic Attribute Profile server can set up multiple bearers and respond to interlaced requests to read multiple values of a set of attributes that have a variable or unknown value length, selected by a set of handles, and return their value.

- Reference

  [11] 4.8.5

  [12] 3.4.4.11, 3.4.4.12

- Initial Condition
  - The IUT sets the EATT Supported bit set to 1 in the Server Supported Features characteristic.
  - A preamble procedure defined in Section 4.2.1.3 or, respectively, Section 4.2.1.4 is used to set up the transport and at least two L2CAP channels.
  - A preamble procedure defined in Section 4.2.3.1 is used to inform the IUT that the Lower Tester supports the Enhanced ATT bearer feature.
  - Two sets of at least two handles of Characteristic Values each in the IUT that permit reading are selected.
- Test Case Configuration

Test Case	Bearer
GATT/SR/GAR/BV-11-C	Unenhanced ATT + EATT
GATT/SR/GAR/BV-12-C	EATT

Table 4.25: Read Multiple Variable Length Characteristic Values over multiple bearers – from Server test cases

- Test Procedure

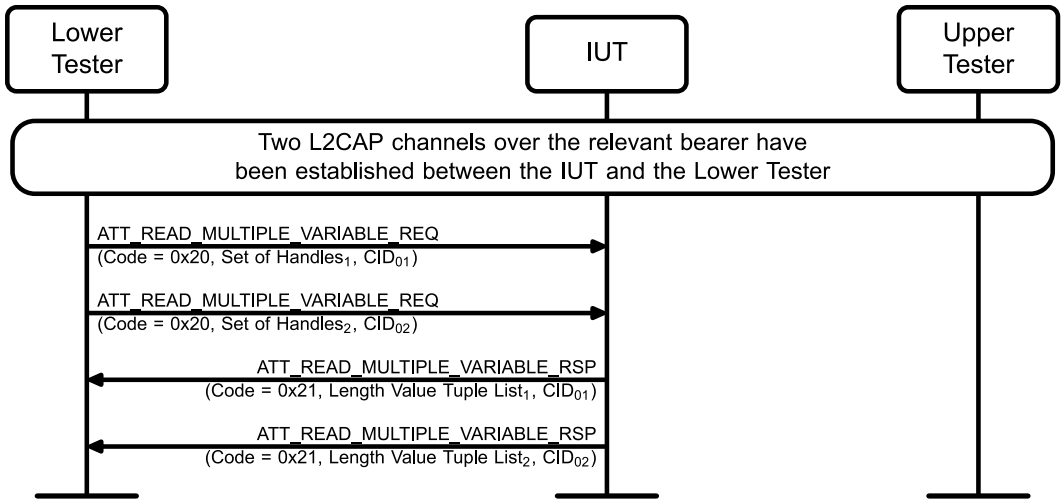


Figure 4.39: Read Multiple Variable Length Characteristic Values over multiple bearers – from Server MSC

1. The Lower Tester concurrently executes Steps 2 and 3 before the transactions are completed.
2. The Lower Tester sends an ATT_READ_MULTIPLE_VARIABLE_REQ PDU to the IUT using one of the selected Set of Handles, on a first CID.
3. The Lower Tester sends a second ATT_READ_MULTIPLE_VARIABLE_REQ PDU to the IUT using a second set of the selected Set of Handles and on a different valid L2CAP channel than the PDU in Step 2, on the second CID.
4. The IUT sends an ATT_READ_MULTIPLE_VARIABLE_RSP PDU to the Lower Tester, containing the values of the characteristics selected by the set of handles in Step 2.
5. The IUT sends an ATT_READ_MULTIPLE_VARIABLE_RSP PDU to the Lower Tester, containing the values of the characteristics selected by the set of handles and on the L2CAP channel used in Step 3.

- Expected Outcome

  Pass verdict

  The IUT sends correctly formatted ATT_READ_MULTIPLE_VARIABLE_REQ PDUs to the Lower Tester.

  The Length Value Tuple List parameter is set to the list of valid handles specified in the ATT_READ_MULTIPLE_VARIABLE_REQ.

  The response size for each PDU does not exceed the ATT_MTU. If the combined length of the Characteristic Values is longer than (ATT_MTU – 1) then the first (ATT_MTU – 1) octets are included in this response.

  The IUT responds within the applicable timeout (Section 3.3.3 of ATT [5]).

- Notes

  A device supporting EATT is not mandatory to support more than one L2CAP channel.

4.6.18 Rejecting Read Multiple Variable Length Characteristic Values – from Server

- Test Purpose

  Verify that a Generic Attribute Profile server can detect and reject an invalid Read Multiple Variable Length Request.

- Reference

  [11] 4.8.5

  [12] 3.4.4.11, 3.4.4.12

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.

- Test Case Configuration

Test Case	Additional Initial Condition	Error Code
GATT/SR/GAR/BI-36-C [Read Multiple Variable Length Characteristic Values – Read Not Permitted]	A set of at least two handles of Characteristic Values in the IUT, one of which does not permit reading, is selected.	0x02 (Read Not Permitted)
GATT/SR/GAR/BI-38-C [Read Multiple Variable Length Characteristic Values – Invalid Handle]	The Lower Tester selects a set of two handles, one of which is known to be invalid.	0x01 (Invalid Handle)
GATT/SR/GAR/BI-40-C [Read Multiple Variable Length Characteristic Values – Insufficient Authorization]	A set of two handles of Characteristic Values in the IUT, one of which requires read authorization, is selected. No authorization procedure has been performed between the IUT and the Lower Tester.	0x08 (Insufficient Authorization)

Test Case	Additional Initial Condition	Error Code
GATT/SR/GAR/BI-42-C [Read Multiple Variable Length Characteristic Values – Insufficient Authentication]	A set of two handles of Characteristic Values in the IUT, one of which requires read authentication, is selected. No authentication procedure has been performed between the IUT and the Lower Tester.	0x05 (Insufficient Authentication)
GATT/SR/GAR/BI-44-C [Read Multiple Variable Length Characteristic Values – Insufficient Encryption Key Size]	A preamble procedure defined in Section 4.2.4 is used to set up an encrypted link. A set of two handles of Characteristic Values in the IUT, one of which requires encryption with a key longer than the key used to establish the encrypted link, is selected.	0x0C (Encryption Key Size Too Short)

Table 4.26: Rejecting Read Multiple Variable Length Characteristic Values – from Server test cases

- Test Procedure

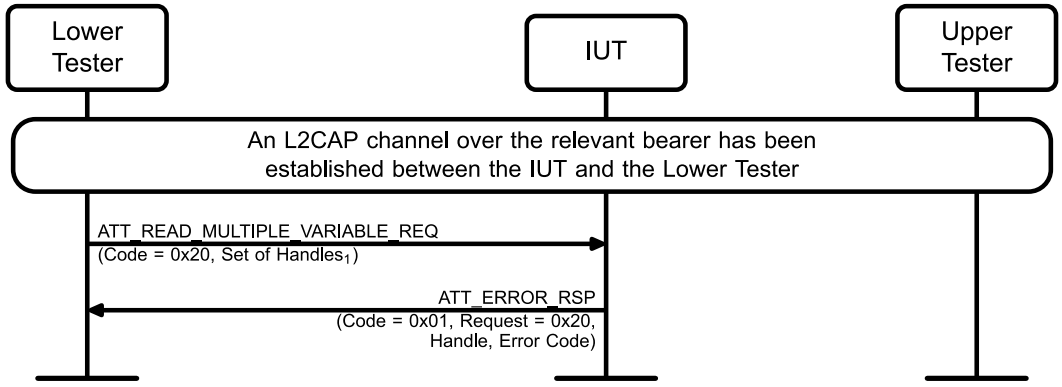


Figure 4.40: Rejecting Read Multiple Variable Length Characteristic Values – from Server MSC

1. The Lower Tester sends an ATT_READ_MULTIPLE_VARIABLE_REQ PDU to the IUT using the selected set of handles.
2. The IUT sends an ATT_ERROR_RSP PDU with Error Code as indicated in Table 4.26, column Error Code, to the Lower Tester.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends an ATT_ERROR_RSP PDU to the Lower Tester. The Request Opcode in Error parameter is set to 0x20. The Attribute Handle in Error parameter is set to the first handle causing the error. The Error code is set as indicated in Table 4.26, column Error Code.

  The IUT responds within the applicable timeout (Section 3.3.3 of ATT [5]).

GATT/SR/GAR/BI-45-C [Multiple Read Characteristic Value Requests – from Server]

- Test Purpose

  Verify that a Generic Attribute Profile server properly handles receiving a second request before responding to the first request.

- Reference

  [1] 4.8.1

  [5] 3.4.1.1, 3.4.4.3, 3.4.4.4

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The Lower Tester has the necessary security permissions from the IUT to read a characteristic.

- Test Procedure

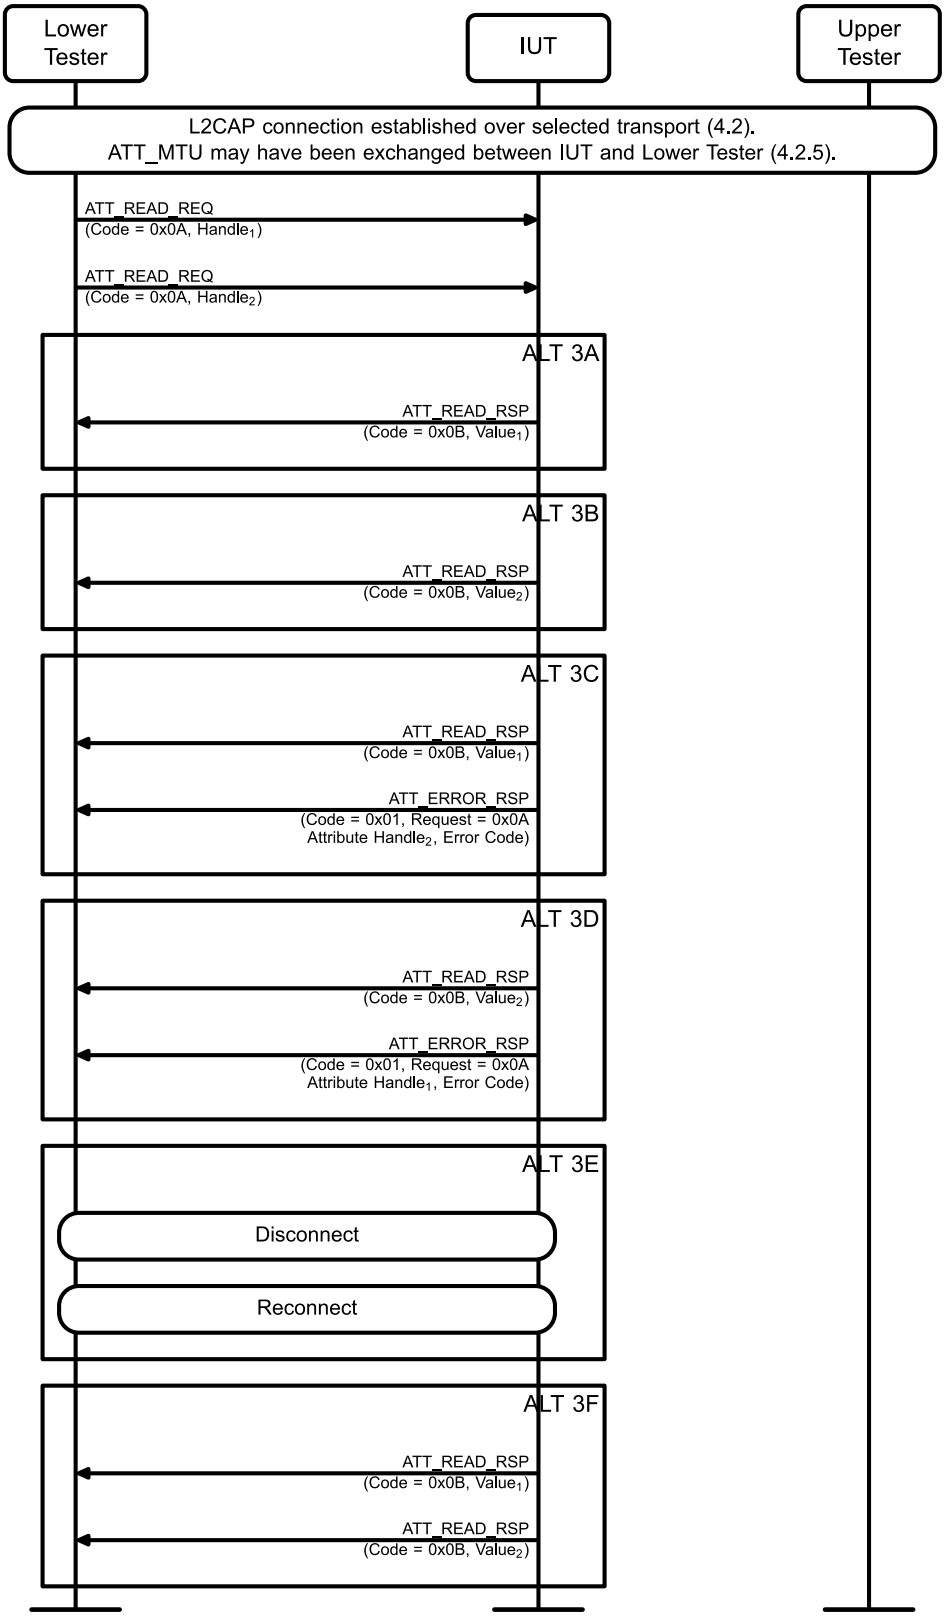


Figure 4.41: GATT/SR/GAR/BI-45-C [Multiple Read Characteristic Value Requests – from Server] MSC

1. The Lower Tester sends an ATT_READ_REQ PDU to the IUT to read a Characteristic Value by specifying the Characteristic Value Handle.
2. Before receiving the ATT_READ_RSP PDU from the IUT, the Lower Tester sends a second ATT_READ_REQ PDU to the IUT to read a Characteristic Value by specifying the Characteristic Value Handle.
3. The Lower Tester expects one of the following alternatives to happen:

   Alternative 3A:

   3A.1 The IUT sends an ATT_READ_RSP PDU for the first request and ignores the second request.

   Alternative 3B:

   3B.1 The IUT sends an ATT_READ_RSP PDU for the second request and ignores the first request.

   Alternative 3C:

   3C.1 The IUT sends an ATT_READ_RSP PDU for the first request and an ATT_ERROR_RSP PDU for the second request with an Error Code and the Attribute Handle set to handle 2. The two PDUs can be sent in any order.

   Alternative 3D:

   3D1. The IUT sends an ATT_ERROR_RSP PDU for the first request with an Error Code and the Attribute Handle set to handle 1 and then sends an ATT_READ_RSP PDU for the second request.

   Alternative 3E:

   3E.1 The IUT disconnects the L2CAP connection with the Lower Tester. The Lower Tester then reconnects the L2CAP connection with the Lower Tester to confirm that the IUT has not crashed.

   Alternative 3F:

   3F.1 The IUT sends an ATT_READ_RSP PDU to the Lower Tester for the first request and then sends an ATT_READ_RSP PDU to the Lower Tester for the second request.

- Expected Outcome

  Pass verdict

  In Step 3, the Lower Tester expects one of the following to happen:

  - The IUT sends an ATT_READ_RSP PDU for the first request and ignores the second request.
  - The IUT sends an ATT_READ_RSP PDU for the second request and ignores the first request.
  - The IUT sends an ATT_READ_RSP PDU for the first request and an ATT_ERROR_RSP PDU for the second request with an Error Code and the Attribute Handle set to handle 2. The two PDUs can be sent in any order.
  - The IUT sends an ATT_ERROR_RSP PDU for the first request with an Error Code and the Attribute Handle set to handle 1 and then sends an ATT_READ_RSP PDU for the second request.
  - The IUT disconnects the L2CAP connection with the Lower Tester. The Lower Tester then reconnects the L2CAP connection with the Lower Tester to confirm that the IUT has not crashed.
  - The IUT sends an ATT_READ_RSP PDU to the Lower Tester for the first request and then sends an ATT_READ_RSP PDU to the Lower Tester for the second request.

4.7 Write

Verify Generic Attribute Profile Writing of Characteristic Values and Characteristic Descriptors.

GATT/CL/GAW/BV-01-C [Write without Response – by Client]

- Test Purpose

  Verify that a Generic Attribute Profile client can issue a characteristic Write without response.

- Reference

  [1] 4.9.1

  [5] 3.4.5.3

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A handle of a Characteristic Value in the Lower Tester that permits writing is selected.
  - If the characteristic permissions require a specific security mode and level, execute pairing and/or bonding with the required security mode and level.

- Test Procedure

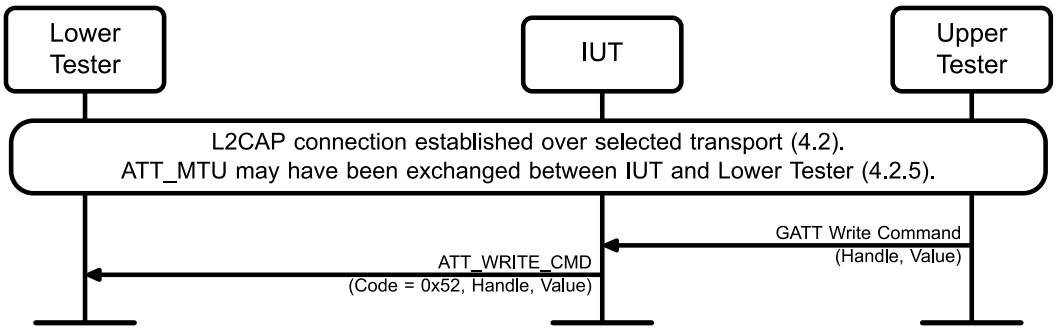


Figure 4.42: GATT/CL/GAW/BV-01-C [Write without Response – by Client] MSC

1. The Upper Tester sends a command to the IUT to write a value of a characteristic in the Lower Tester specifying the handle that is to be written, e.g., GATT Write Command(Handle, Value).
2. The IUT sends an ATT_WRITE_CMD PDU to the Lower Tester, with the handle of the characteristic to be written and the value that is to be written.

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_WRITE_CMD to the Lower Tester, specifying the handle of the characteristic to be written and the value that is to be written.

  The size of the ATT_WRITE_CMD does not exceed any negotiated ATT_MTU.

GATT/SR/GAW/BV-01-C [Write Without Response – to Server]

- Test Purpose

  Verify that a Generic Attribute Profile server can support writing to a characteristic without response.

- Reference

  [1] 4.9.1

  [5] 3.4.5.3

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A handle of a Characteristic Value in the IUT that permits writing is selected. If that characteristic also supports reading, then ALT 3 may be used.
  - The Lower Tester has the necessary security permissions from the IUT to read and write a characteristic.

- Test Procedure

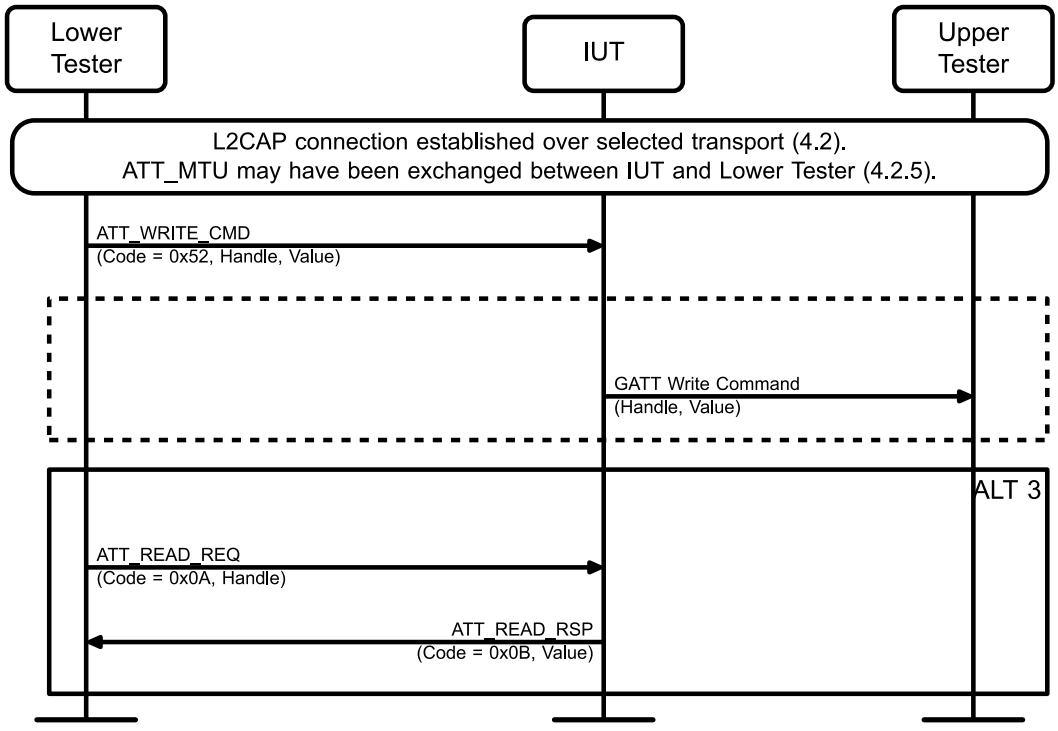


Figure 4.43: GATT/SR/GAW/BV-01-C [Write Without Response – to Server] MSC

1. The Lower Tester sends an ATT_WRITE_CMD PDU to the IUT, with the selected handle and value.
2. The IUT optionally indicates this to the Upper Tester, e.g., GATT Write Command(Handle, Value).

3. Perform alternative 3 if the characteristic is readable:
   Alternative 3:
   - 3A.1 The Lower Tester sends an ATT_READ_REQ PDU to the IUT, with the selected handle to verify that the value specified in Step 1 has been written in the IUT.
   - 3A.2 The IUT sends an ATT_READ_RSP PDU to the Lower Tester, containing the value of the requested Characteristic.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT may indicate the receipt of the ATT_WRITE_CMD PDU via message to the Upper Tester (e.g., GATT Write Command(Handle, Value)).

  In Step 3A.2, the IUT sends an ATT_READ_RSP PDU reporting the same value delivered in the ATT_WRITE_CMD PDU within the applicable timeout (Section 3.3.3 of ATT [5]).

GATT/CL/GAW/BV-02-C [Write without Response with Authentication – by Client]

- Test Purpose

  Verify that a Generic Attribute Profile client can write a characteristic with authentication without response.

- Reference

  [1] 4.9.2

  [5] 3.4.5.3

- Initial Condition
  - A preamble procedure defined in Section 4.2.1.2 is used to set up the transport and L2CAP channel over LE.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A handle of a Characteristic Value in the IUT that permits writing and requires authentication is selected.
  - The ATT Bearer is not encrypted.
  - The Lower Tester is bonded with the IUT, so it has the necessary security permissions from the IUT to write a Characteristic Value.

- Test Procedure

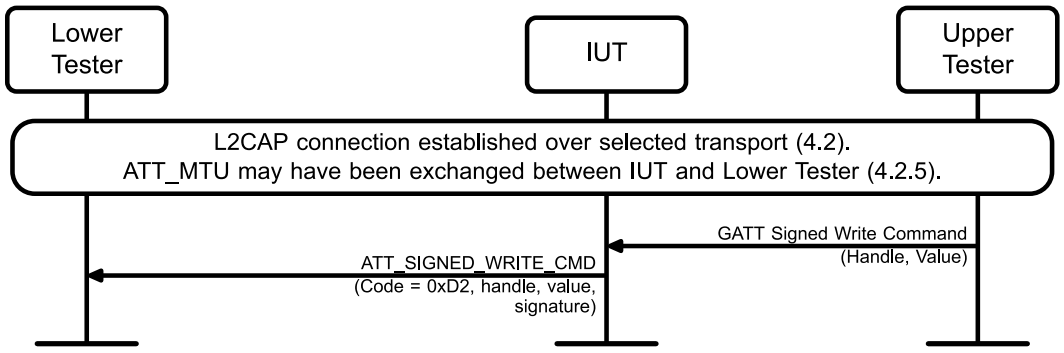


Figure 4.44: GATT/CL/GAW/BV-02-C [Write without Response with Authentication – by Client] MSC

1. The Upper Tester sends a command to the IUT to write a value of a characteristic in the Lower Tester specifying the handle that is to be written, e.g., GATT Signed Write Command(Handle, Value).
2. The IUT sends a correctly formatted signed ATT_SIGNED_WRITE_CMD PDU to the Lower Tester.

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted signed ATT_SIGNED_WRITE_CMD PDU to the Lower Tester and the signature is verified by the Lower Tester.

  The Attribute Handle parameter is set to the handle of the characteristic that is to be written. The Characteristic Value of the Signed Write Command is an authenticated value, as defined in the Security Manager (Volume 6 [8]), and matches the value specified by the Upper Tester.

  The size of the ATT_SIGNED_WRITE_CMD PDU does not exceed any negotiated ATT_MTU.

GATT/SR/GAW/BV-02-C [Write without Response with Authentication – to Server]

- Test Purpose

  Verify that a Generic Attribute Profile server can support a characteristic Write with authentication without response.

- Reference

  [1] 4.9.2

  [5] 3.4.5.3

- Initial Condition

  - A preamble procedure defined in Section 4.2.1.2 is used to set up the transport and L2CAP channel over LE.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A handle of a Characteristic Value in the IUT that permits writing and requires authentication is selected. If that characteristic also supports reading, then ALT 3 may be used.
  - The ATT Bearer is not encrypted.
  - The Lower Tester is bonded with the IUT, so it has the necessary security permissions from the IUT to read and write a Characteristic Value.

- Test Procedure

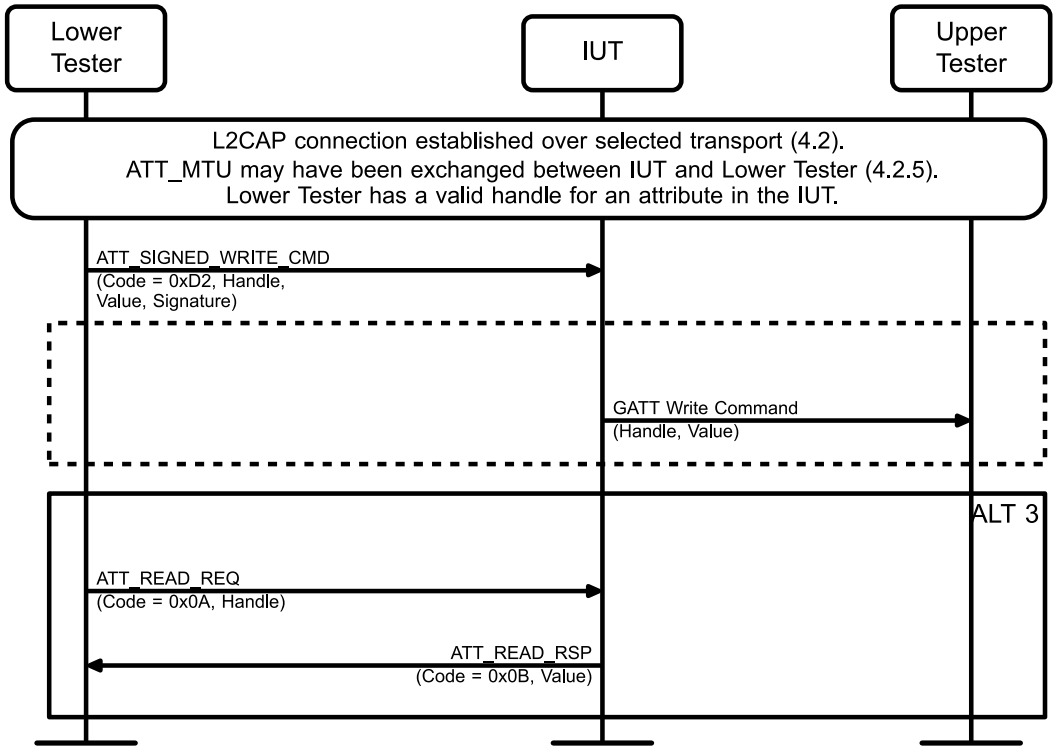


Figure 4.45: GATT/SR/GAW/BV-02-C [Write without Response with Authentication – to Server] MSC

1. The Lower Tester sends an ATT_SIGNED_WRITE_CMD PDU to the IUT, with the selected handle and value.
2. The IUT may indicate this to the Upper Tester, e.g., GATT Write Command(Handle, Value).
3. Perform alternative 3 if the characteristic is readable:
   Alternative 3:
   - 3A.1 The Lower Tester sends an ATT_READ_REQ PDU to the IUT, with the selected handle to verify that the value specified in Step 1 has been written in the IUT.
   - 3A.2: The IUT sends an ATT_READ_RSP PDU to the Lower Tester, containing the value of the requested Characteristic.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT may indicate that via message to the Upper Tester (e.g., GATT Write Command (Handle, Value)).

  In Step 3A.2, if the characteristic is readable, the IUT sends an ATT_READ_RSP PDU reporting the same value delivered in the ATT_SIGNED_WRITE_CMD PDU within the applicable timeout (Section 3.3.3 of ATT [5]).

GATT/SR/GAW/BI-01-C [Write without Response with Authentication – Invalid Signature]

- Test Purpose

  For a readable characteristic, verify that a Generic Attribute Profile server can detect a characteristic Write with authentication without response in which the signature is invalid and ignore the write command.

- Reference

  [1] 4.9.2

- Initial Condition
  - A preamble procedure defined in Section 4.2.1.2 is used to set up the transport and L2CAP channel over LE.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A handle of a Characteristic Value in the IUT that permits writing and requires authentication is selected.
  - The Lower Tester and the IUT are bonded so that the Lower Tester can generate ATT_SIGNED_WRITE_CMD PDUs with valid signatures.

- Test Procedure

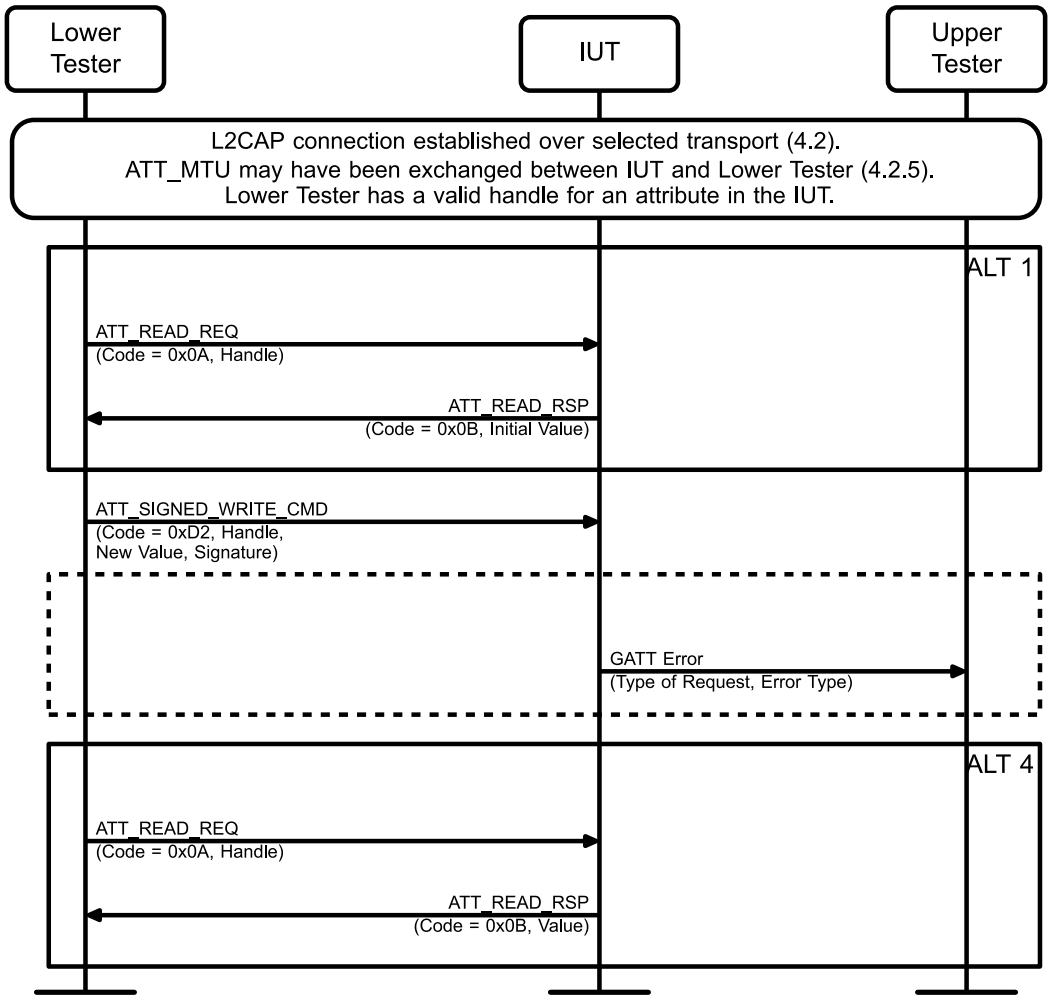


Figure 4.46: GATT/SR/GAW/BI-01-C [Write without Response with Authentication – Invalid Signature] MSC

1. Perform alternative 1 if the characteristic is readable:

   1A.1 The Lower Tester sends an ATT_READ_REQ PDU to the IUT, with the selected handle to determine the current value of the Characteristic.

1A.2 The IUT sends an ATT_READ_RSP PDU to the Lower Tester, containing the current value of the requested Characteristic.

2. The Lower Tester sends an ATT_SIGNED_WRITE_CMD PDU to the IUT, with an invalid signature and with a different Characteristic Value than the value reported in the previous step.
3. The IUT may report an error message to the Upper Tester (e.g., a generic “GATT Error” message that indicates what kind of event happened (Signed Write Command) and the kind of error (Insufficient Authentication)).
4. Perform alternative 4 if the characteristic is readable:
   4A.1 The Lower Tester sends an ATT_READ_REQ PDU to the IUT, with the selected handle to determine that the value of the Characteristic has not been changed.
   4A.2 The IUT sends an ATT_READ_RSP PDU to the Lower Tester, containing the value of the requested Characteristic.

- Expected Outcomes

  Pass verdict

  In Step 1A.2, in response to the first ATT_READ_REQ PDU, the IUT reports an initial value for the selected characteristic in an ATT_READ_RSP PDU.

  In Step 3, the IUT may report an error message to the Upper Tester (e.g., a generic “GATT Error” message that indicates what kind of event happened (Signed Write Command) and the kind of error (Insufficient Authentication)).

  In Step 4A.2, in response to the second ATT_READ_REQ PDU, the IUT reports the same value for the selected characteristic in a second ATT_READ_RSP PDU.

GATT/CL/GAW/BV-03-C [Write Characteristic Value - by Client]

- Test Purpose

  Verify that a Generic Attribute Profile client can write a Characteristic Value selected by handle.

- Reference

  [1] 4.9.3

  [5] 3.4.5.1, 3.4.5.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A handle of a Characteristic Value in the Lower Tester that permits writing is selected.
  - If the characteristic permissions require a specific security mode and level, execute pairing and/or bonding with the required security mode and level.

- Test Procedure

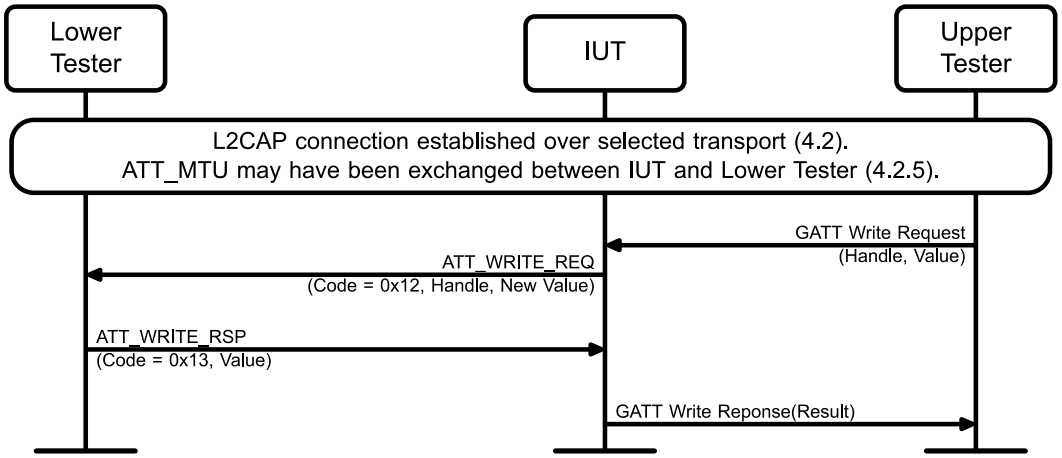


Figure 4.47: GATT/CL/GAW/BV-03-C [Write Characteristic Value - by Client] MSC

1. The Upper Tester sends a GATT command to the IUT to initiate the test, e.g., GATT Read Request(Handle, Value).
2. The IUT sends a correctly formatted ATT_WRITE_REQ PDU to the Lower Tester, with the handle and the value that is to be written.
3. The Lower Tester sends an ATT_WRITE_RSP PDU, which contains a valid value.
4. The IUT sends the result to the Upper Tester, e.g., GATT Write Response.

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_WRITE_REQ PDU (0x12) to the Lower Tester, specifying the value that is to be written from the Upper Tester.

  The Characteristic handle parameter is set to a valid handle.

  The size of the ATT_WRITE_REQ PDU does not exceed any negotiated ATT_MTU.

  The IUT receives the response from the Lower Tester and sends the GATT Write Response to the Upper Tester.

4.7.1 Write Characteristic Value – by Client

- Test Purpose

  Verify Generic Attribute Profile client behavior when the Write Characteristic Value procedure fails.

- Reference

  [1] 4.9.3

  [5] 3.4.5.1, 3.4.5.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.

- Test Case Configuration

Test Case	Additional Initial Condition	Error Code
GATT/CL/GAW/BI-02-C [Write Characteristic Value – Invalid Handle]	N/A	0x01 (Invalid Handle)
GATT/CL/GAW/BI-03-C [Write Characteristic Value – Write Not Permitted]	A handle of a Characteristic Value in the Lower Tester is selected.	0x03 (Write Not Permitted)
GATT/CL/GAW/BI-04-C [Write Characteristic Value – Insufficient Authorization]	A handle of a Characteristic Value in the Lower Tester that requires write authorization is selected.	0x08 (Insufficient Authorization)
GATT/CL/GAW/BI-05-C [Write Characteristic Value – Insufficient Authentication]	A handle of a Characteristic Value in the Lower Tester that requires write authentication is selected.	0x05 (Insufficient Authentication)
GATT/CL/GAW/BI-06-C [Write Characteristic Value – Insufficient Encryption Key Size]	A preamble procedure defined in Section 4.2.4 is used to set up an encrypted link. A handle of a Characteristic Value in the Lower Tester that requires encryption with a key longer than the key used to establish the encrypted link is selected.	0x0C (Encryption Key Size Too Short)

Table 4.27: Write Characteristic Value – by Client test cases

- Test Procedure

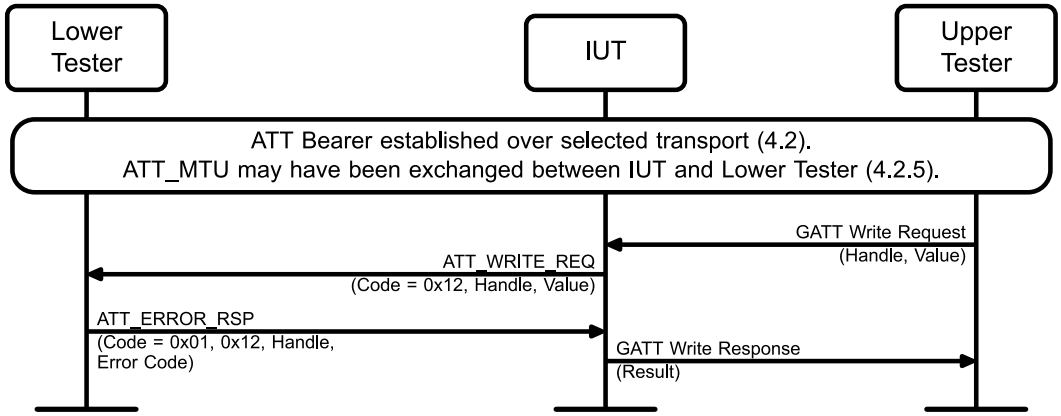


Figure 4.48: Write Characteristic Value – by Client MSC

1. The Upper Tester sends a GATT command to the IUT to initiate the test, e.g., GATT Write Request(Handle, Value).
2. The IUT sends a correctly formatted ATT_WRITE_REQ PDU to the Lower Tester, with the handle and the value that is to be written.
3. The Lower Tester sends an ATT_ERROR_RSP PDU, which contains the error code indicated in Table 4.27, column “Error Code”.
4. The IUT sends the result to the Upper Tester, e.g., GATT Write Response(Result).

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_WRITE_REQ PDU to the Lower Tester.

  Upon receiving an ATT_ERROR_RSP PDU from the Lower Tester, the IUT sends the result to the Upper Tester, e.g., GATT Write Response(Result).

GATT/SR/GAW/BV-03-C [Write Characteristic Value – to Server]

- Test Purpose

  Verify that a Generic Attribute Profile server can support writing a Characteristic Value selected by handle.

- Reference

  [1] 4.9.3

  [5] 3.4.5.1, 3.4.5.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A handle of a Characteristic Value in the IUT that permits writing is selected.
  - The Lower Tester has the necessary security permissions from the IUT to read and write the characteristic.

- Test Procedure

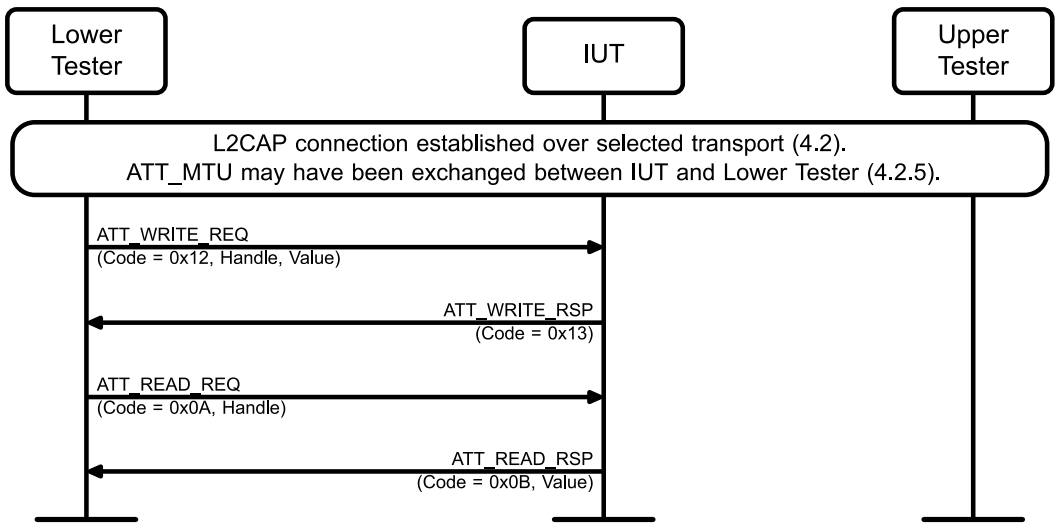


Figure 4.49: GATT/SR/GAW/BV-03-C [Write Characteristic Value – to Server] MSC

1. The Lower Tester sends an ATT_WRITE_REQ PDU to the IUT, with the handle and value to be written to the selected Characteristic.
2. The IUT sends an ATT_WRITE_RSP PDU to the Lower Tester.

3. The Lower Tester sends an ATT_READ_REQ PDU to the IUT, with the selected handle to determine that the value of the Characteristic has been changed.
4. The IUT sends an ATT_READ_RSP PDU to the Lower Tester, containing the value of the requested Characteristic.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends a correctly formatted ATT_WRITE_RSP PDU to the Lower Tester.

  In Step 4, the IUT sends an ATT_READ_RSP PDU reporting the same value delivered in the ATT_WRITE_REQ PDU.

  The IUT responds within the applicable timeout (Section 3.3.3 of ATT [5]).

4.7.2 Rejecting Write Characteristic Value – to Server

- Test Purpose

  Verify that a Generic Attribute Profile server can detect and reject an invalid Write Characteristic Value Request.

- Reference

  [1] 4.9.3

  [5] 3.4.1.1, 3.4.5.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.

- Test Case Configuration

Test Case	Additional Initial Condition	Error Code
GATT/SR/GAW/BI-02-C [Write Characteristic Value – Invalid Handle Response]	The Lower Tester selects a handle that is known to be invalid.	0x01 (Invalid Handle)
GATT/SR/GAW/BI-03-C [Write Characteristic Value – Write Not Permitted Response]	A handle of a Characteristic Value in the IUT that does not permit writing is selected.	0x03 (Write Not Permitted)
GATT/SR/GAW/BI-04-C [Write Characteristic Value – Insufficient Authorization]	A handle of a Characteristic Value in the IUT that requires write authorization is selected. No authorization procedure has been performed between the IUT and the Lower Tester.	0x08 (Insufficient Authorization)
GATT/SR/GAW/BI-05-C [Write Characteristic Value – Insufficient Authentication]	A handle of a Characteristic Value in the IUT that requires write authentication is selected. No authentication procedure has been performed between the IUT and the Lower Tester.	0x05 (Insufficient Authentication)

Test Case	Additional Initial Condition	Error Code
GATT/SR/GAW/BI-06-C [Write Characteristic Value – Insufficient Encryption Key Size]	A preamble procedure defined in Section 4.2.4 is used to set up an encrypted link. A handle of a Characteristic Value in the IUT that requires encryption with a key longer than the key used to establish the encrypted link is selected.	0x0C (Encryption Key Size Too Short)

Table 4.28: Rejecting Write Characteristic Value – to Server test cases

- Test Procedure

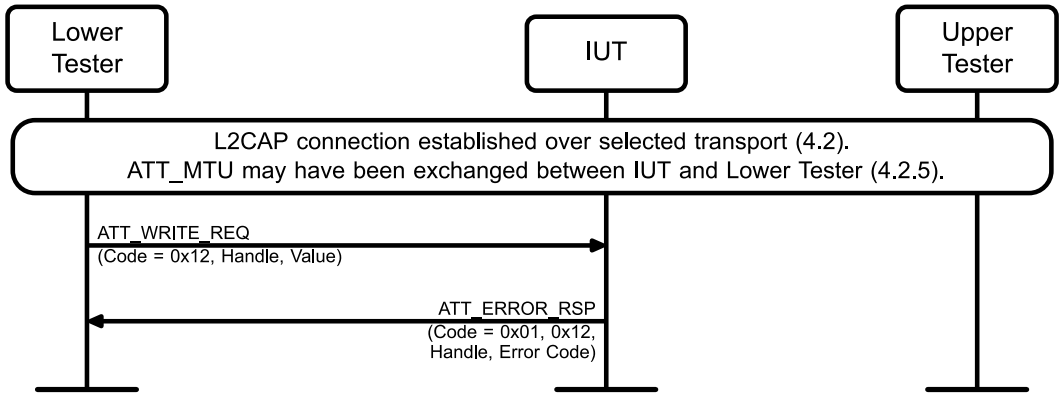


Figure 4.50: Rejecting Write Characteristic Value – to Server MSC

1. The Lower Tester sends an ATT_WRITE_REQ PDU to the IUT using the selected handle.
2. The IUT sends an ATT_ERROR_RSP PDU to the Lower Tester, with the Error Code set as indicated in Table 4.28, column Error Code.

- Expected Outcome

  Pass verdict

  The IUT sends an ATT_ERROR_RSP PDU to the Lower Tester. The Request Opcode in Error parameter is set to 0x12. The Attribute Handle in Error parameter is set to the handle sent by the Lower Tester. The Error Code is set as indicated in Table 4.28, column Error Code.

  The IUT responds within the applicable timeout (Section 3.3.3 of ATT [5]).

4.7.3 Write Long Characteristic – by Client

- Test Purpose

  Verify that a Generic Attribute Profile client can write a Long Characteristic Value or a Long Characteristic Descriptor selected by handle.

- Reference

  [1] 4.9.4, 4.12.4

  [5] 3.4.6.1, 3.4.6.2, 3.4.6.3, 3.4.6.4

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - MTU is smaller than 512, and smaller than the value that has to be written.

- A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
- The Lower Tester contains at least one valid Long Characteristic or, respectively, Long Characteristic Descriptor, as indicated in Table 4.29, and the handle of this Attribute is known to the IUT.
- If the Attribute permissions require a specific security mode and level, execute pairing and/or bonding with the required security mode and level.

- Test Case Configuration

Test Case	Attribute
GATT/CL/GAW/BV-05-C [Write Long Characteristic Value – by Client]	Long Characteristic Value
GATT/CL/GAW/BV-09-C [Write Long Characteristic Descriptors – by Client]	Long Characteristic Descriptor

Table 4.29: Write Long Characteristic – by Client test cases

- Test Procedure

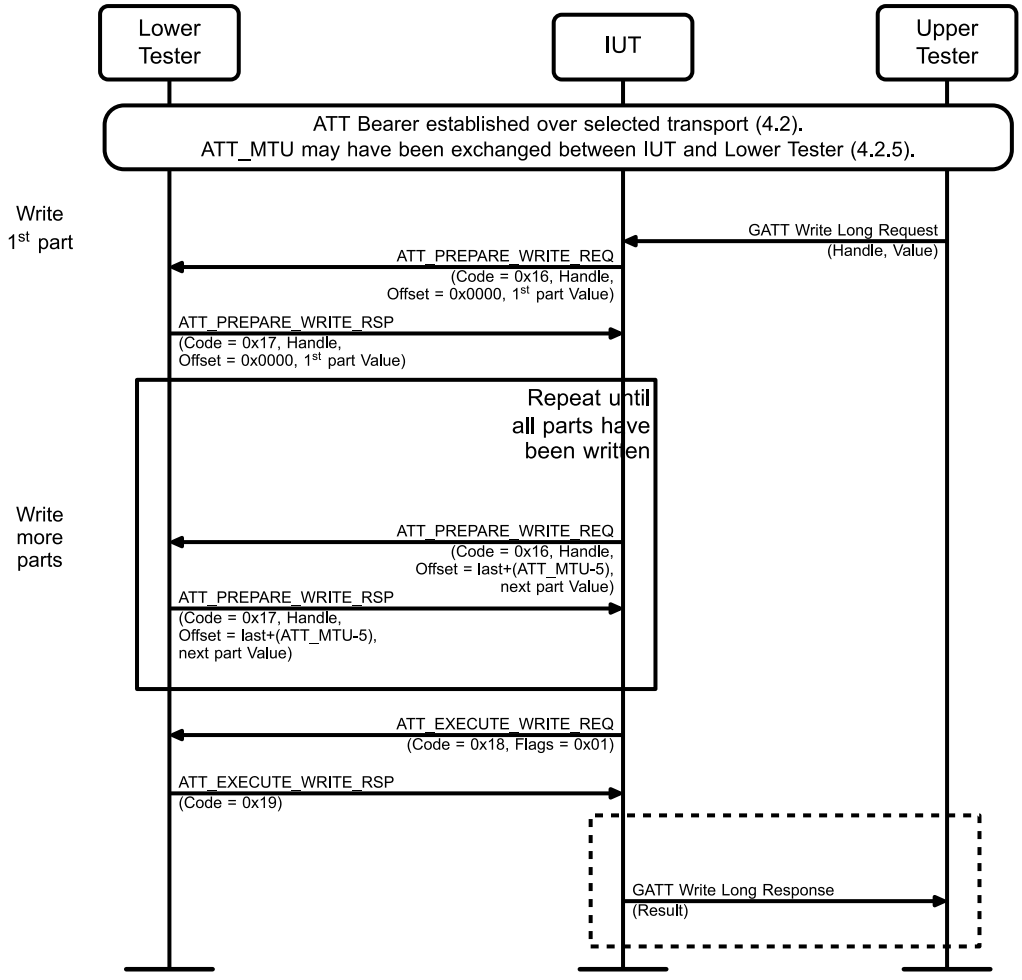


Figure 4.51: Write Long Characteristic – by Client MSC

1. The Upper Tester sends a request to the IUT to write the value of an Attribute, as indicated in Table 4.29, in the Lower Tester, e.g., GATT Write Long Request.
2. The IUT sends an ATT_PREPARE_WRITE_REQ PDU to the Lower Tester, containing the first part of the long attribute value.
3. The Lower Tester sends an ATT_PREPARE_WRITE_RSP PDU to the IUT.
4. Repeat Steps 5 and 6 until all the parts have been written.
5. The IUT sends ATT_PREPARE_WRITE_REQ PDUs, specifying the handle of the long characteristic to be written, the offset of the first octet to be written, and part of the value of the long characteristic to be written. The offset parameters are all values of Nx(ATT_MTU – 5), with N ranging from 1 to the last value sufficient to write the entire long characteristic.
6. The Lower Tester sends correctly formatted ATT_PREPARE_WRITE_RSP PDUs to the IUT.
7. The IUT sends an ATT_EXECUTE_WRITE_REQ PDU to the Lower Tester, to write the pending prepared values.
8. The Lower Tester sends a correctly formatted ATT_EXECUTE_WRITE_RSP PDU to the IUT.
9. The IUT might send a response to the Upper Tester with the result of the procedure.

- Expected Outcome

  Pass verdict

  In Steps 2 and 5, the IUT sends correctly formatted ATT_PREPARE_WRITE_REQ PDUs to the Lower Tester.

  Each ATT_PREPARE_WRITE_REQ PDU specifies the handle of the Attribute to be written, the offset of the first octet to be written, and part of the value of the Attribute to be written, as indicated in Table 4.29. The offset parameters are all values of Nx(ATT_MTU – 5), with N ranging from 0 (for the first part value) to the last value sufficient to write the entire Attribute.

  In Step 7, after sending all the ATT_PREPARE_WRITE_REQ PDUs, the IUT sends a correctly formatted ATT_EXECUTE_WRITE_REQ PDU (0x18).

  The size of each ATT_PREPARE_WRITE_REQ PDU does not exceed any negotiated ATT_MTU.

4.7.4 Write Long Characteristic Value – by Client

- Test Purpose

  Verify Generic Attribute Profile client behavior when the Write Long Characteristic Value procedure fails.

- Reference

  [1] 4.9.4

  [5] 3.4.6.1, 3.4.6.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - MTU is smaller than 512, and smaller than the value that has to be written.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.

- Test Case Configuration

Test Case	Additional Initial Condition	Error Code
GATT/CL/GAW/BI-07-C [Write Long Characteristic Value – Invalid Handle]	N/A	0x01 (Invalid Handle)
GATT/CL/GAW/BI-08-C [Write Long Characteristic Value – Write Not Permitted]	A handle of a Characteristic Value in the Lower Tester is selected.	0x03 (Write Not Permitted)
GATT/CL/GAW/BI-11-C [Write Long Characteristic Value – Insufficient Authorization]	A handle of a Characteristic Value in the Lower Tester that requires write authorization is selected. No authorization procedure has been performed between the IUT and the Lower Tester.	0x08 (Insufficient Authorization)
GATT/CL/GAW/BI-12-C [Write Long Characteristic Value – Insufficient Authentication]	A handle of a Characteristic Value in the Lower Tester that requires write authentication is selected. No authentication procedure has been performed between the IUT and the Lower Tester.	0x05 (Insufficient Authentication)
GATT/CL/GAW/BI-13-C [Write Long Characteristic Value – Insufficient Encryption Key Size]	A preamble procedure defined in Section 4.2.4 is used to set up an encrypted link. A handle of a Characteristic Value in the Lower Tester that requires encryption with a key longer than the key used to establish the encrypted link is selected.	0x0C (Encryption Key Size Too Short)

Table 4.30: Write Long Characteristic Value – by Client test cases

- Test Procedure

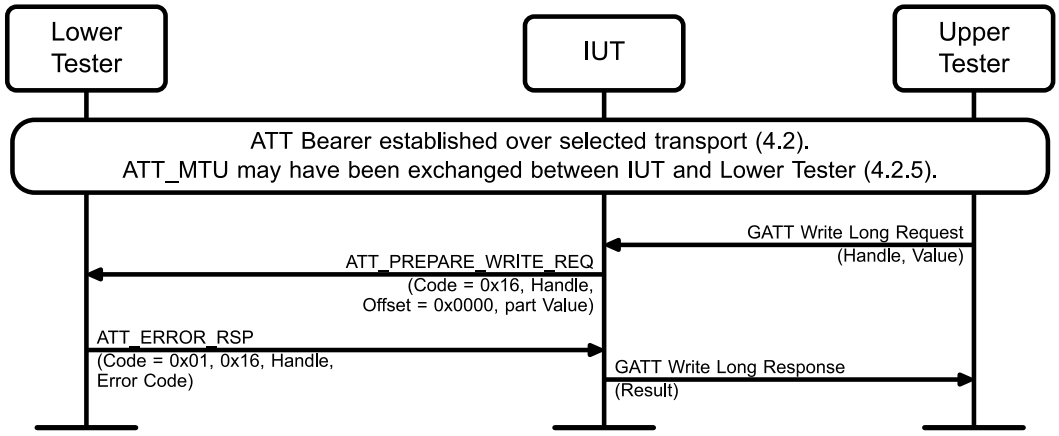


Figure 4.52: Write Long Characteristic Value – by Client MSC

1. The Upper Tester sends a command to the IUT to write the value of a long characteristic in the Lower Tester, e.g., GATT Write Long Request(Handle, Value).
2. The IUT sends an ATT_PREPARE_WRITE_REQ PDU to the Lower Tester.

3. The Lower Tester sends an ATT_ERROR_RSP PDU to the IUT with the Error Code indicated in Table 4.30, column Error Code.
4. The IUT sends the result to the Upper Tester, e.g., GATT Write Long Response.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends a correctly formatted ATT_PREPARE_WRITE_REQ PDU to the Lower Tester.

  In Step 4, upon receiving an ATT_ERROR_RSP PDU from the Lower Tester, the IUT sends the result to the Upper Tester, e.g., GATT Write Long Response.

GATT/CL/GAW/BI-09-C [Write Long Characteristic Value – Invalid Offset]

- Test Purpose

  Verify Generic Attribute Profile client behavior when the Write Long Characteristic Value procedure fails due to invalid offset.

- Reference

  [1] 4.9.4

  [5] 3.4.6.1, 3.4.6.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - MTU is smaller than 512, and smaller than the value that has to be written.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A handle of a long Characteristic Value in the Lower Tester that permits writing is selected. The offset is set to a value greater than the length of the selected Characteristic Value.

- Test Procedure

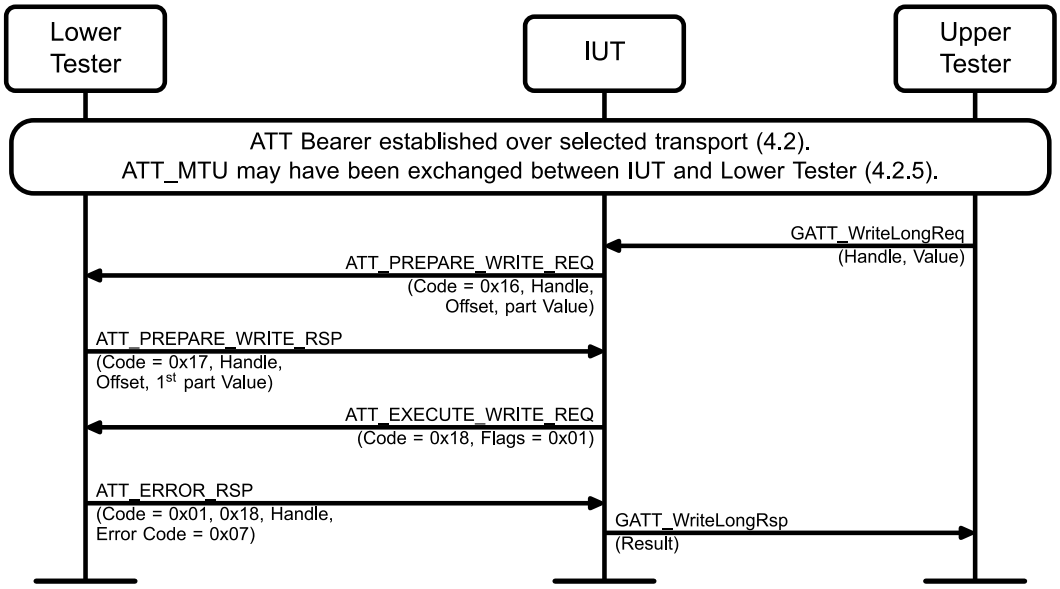


Figure 4.53: GATT/CL/GAW/BI-09-C [Write Long Characteristic Value – Invalid Offset] MSC

1. The Upper Tester sends a command to the IUT to write the value of a Long Characteristic in the Lower Tester, e.g., GATT Write Long Request(Handle, Value).
2. The IUT sends an ATT_PREPARE_WRITE_REQ PDU to the Lower Tester, with the selected Offset.
3. The Lower Tester sends an ATT_PREPARE_WRITE_RSP PDU to the IUT.
4. The IUT sends an ATT_EXECUTE_WRITE_REQ PDU to the Lower Tester, to write the pending prepared values.
5. The Lower Tester sends an ATT_ERROR_RSP PDU to the IUT with the Error Code “Invalid Offset” (0x07).
6. The IUT sends the result to the Upper Tester, e.g., GATT Write Long Response.

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_PREPARE_WRITE_REQ PDU to the Lower Tester.

  After receiving an ATT_PREPARE_WRITE_RSP PDU from the Lower Tester, the IUT sends a correctly formatted ATT_EXECUTE_WRITE_REQ PDU to the Lower Tester.

  Upon receiving an ATT_ERROR_RSP PDU from the Lower Tester, the IUT sends the result to the Upper Tester, e.g., GATT Write Long Response.

4.7.5 Write Long Characteristic – to Server

- Test Purpose

  Verify that a Generic Attribute Profile server can support writing a Long Characteristic Value or Long Characteristic Descriptor selected by handle.

- Reference

  [1] 4.9.4

  [5] 3.4.6.1, 3.4.6.2, 3.4.6.3, 3.4.6.4

- Initial Condition
  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The IUT contains a valid characteristic, and the handle of this characteristic is known to the Lower Tester.
  - The Lower Tester has the necessary security permissions to write the value of the characteristic of the IUT.
- Test Case Configuration

Test Case	Attribute
GATT/SR/GAW/BV-05-C [Write Long Characteristic Value – to Server]	Long Characteristic Value
GATT/SR/GAW/BV-09-C [Write Long Characteristic Descriptors – to Server]	Long Characteristic Descriptor

Table 4.31: Write Long Characteristic – to Server test cases

- Test Procedure

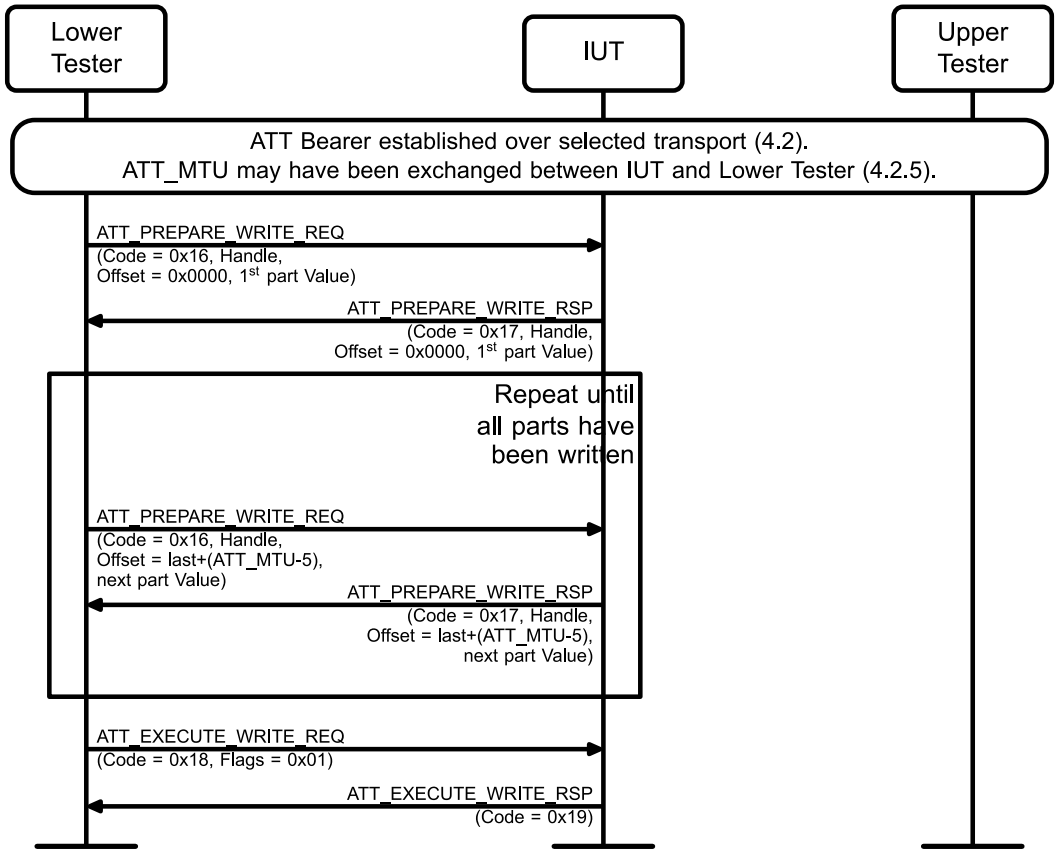


Figure 4.54: Write Long Characteristic – to Server MSC

1. The Lower Tester sends ATT_PREPARE_WRITE_REQ PDUs to the IUT to write all parts of the value of a long characteristic, setting the offset to Nx(ATT_MTU – 5), with N starting from 0. The handle of the Attribute indicated in Table 4.31 to be written and the part value to be written are also specified.
2. The IUT sends correctly formatted ATT_PREPARE_WRITE_RSP PDUs to the Lower Tester, with each offset and part value.
3. After receiving the last ATT_PREPARE_WRITE_RSP PDU, the Lower Tester sends an ATT_EXECUTE_WRITE_REQ PDU to the IUT, with Flags = 0x01.
4. The IUT sends an ATT_EXECUTE_WRITE_RSP PDU to the Lower Tester.

- Expected Outcome

  Pass verdict

  The IUT sends a series of correctly formatted ATT_PREPARE_WRITE_RSP PDUs to the Lower Tester. The offset and part value sent in each response match the offset and part value sent in the corresponding request.

  The IUT sends a correctly formatted ATT_EXECUTE_WRITE_RSP PDU to the Lower Tester.

  The responses do not exceed any negotiated ATT_MTU.

  All of the IUT's responses occur within the applicable timeout (Section 3.3.3 of ATT [5]).

4.7.6 Rejecting Write Long Characteristic Value – to Server

- Test Purpose

  Verify that a Generic Attribute Profile server can detect and reject an invalid Write Long Characteristic Request.

- Reference

  [1] 4.9.4

  [5] 3.4.1.1, 3.4.6.1

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.

- Test Case Configuration

Test Case	Additional Initial Condition	Error Code
GATT/SR/GAW/BI-07-C [Write Long Characteristic Value – Invalid Handle Response]	The Lower Tester selects a handle that is known to be invalid.	0x01 (Invalid Handle)
GATT/SR/GAW/BI-08-C [Write Long Characteristic Value – Write Not Permitted Response]	A handle of a Characteristic Value in the IUT is selected.	0x03 (Write Not Permitted)

Test Case	Additional Initial Condition	Error Code
GATT/SR/GAW/BI-11-C [Write Long Characteristic Value – Insufficient Authorization]	A handle of a Characteristic Value in the IUT that requires write authorization is selected. No authorization procedure has been performed between the IUT and the Lower Tester.	0x08 (Insufficient Authorization)
GATT/SR/GAW/BI-12-C [Write Long Characteristic Value – Insufficient Authentication]	A handle of a Characteristic Value in the IUT that requires write authentication is selected. No authentication procedure has been performed between the IUT and the Lower Tester.	0x05 (Insufficient Authentication)
GATT/SR/GAW/BI-13-C [Write Long Characteristic Value – Insufficient Encryption Key Size]	A preamble procedure defined in Section 4.2.4 is used to set up an encrypted link. A handle of a Characteristic Value in the IUT that requires encryption with a key longer than the key used to establish the encrypted link is selected.	0x0C (Encryption Key Size Too Short)

Table 4.32: Rejecting Write Long Characteristic Value – to Server test cases

- Test Procedure

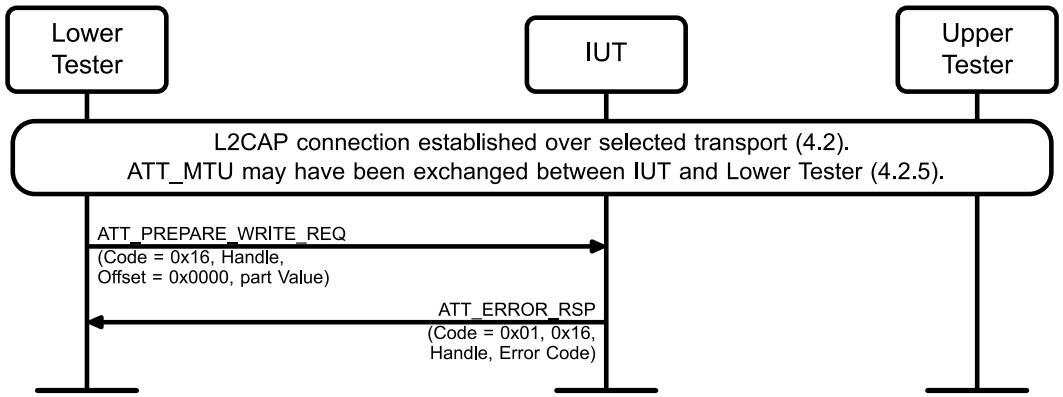


Figure 4.55: Rejecting Write Long Characteristic Value – to Server MSC

1. The Lower Tester sends an ATT_PREPARE_WRITE_REQ PDU (Handle, Offset = 0x0000, Part Value) to the IUT.
2. The IUT sends an ATT_ERROR_RSP PDU (code 0x01) to the Lower Tester, with the Error Code set as indicated in Table 4.32, column Error Code.

- Expected Outcome

Pass verdict

The IUT sends an ATT_ERROR_RSP PDU (code 0x01) to the Lower Tester. The Request Opcode in Error parameter is set to 0x16. The Attribute Handle in Error parameter is set to the handle sent by the Lower Tester. The Error Code is set as indicated in Table 4.32, column “Error Code”.

The IUT responds within the applicable timeout (Section 3.3.3 of ATT [5]).

GATT/SR/GAW/BI-09-C [Write Long Characteristic Value – Invalid Offset Response]

- Test Purpose

  Verify that a Generic Attribute Profile server can detect and reject a Write Long Characteristic Request with an invalid offset and issue an Invalid Offset Response.

- Reference

  [1] 4.9.4

  [5] 3.4.1.1, 3.4.6.1

- Initial Condition

  - The Lower Tester is configured to have an ATT_MTU of 23.
  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A handle of a Characteristic Value in the IUT that has variable length and permits writing is selected.

- Test Procedure

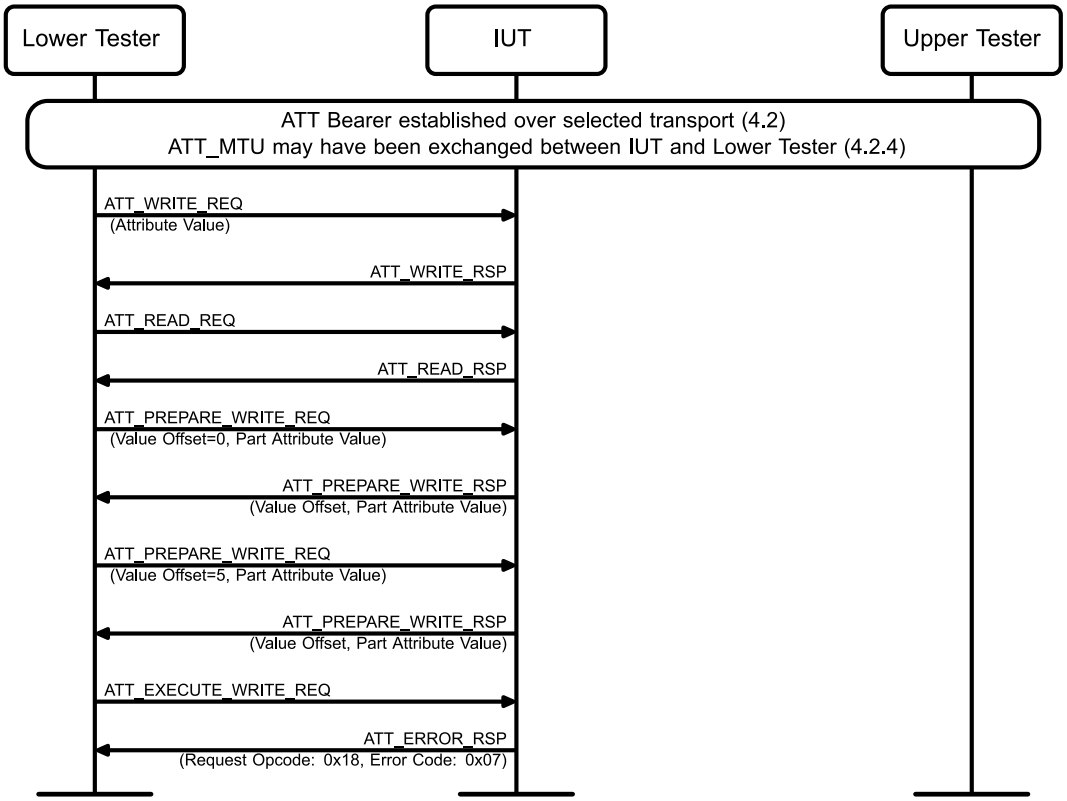


Figure 4.56: GATT/SR/GAW/BI-09-C [Write Long Characteristic Value – Invalid Offset Response] MSC

1. The Lower Tester sends an ATT_WRITE_REQ PDU to the IUT with the Attribute Value of 1 octet.
2. The IUT sends an ATT_WRITE_RSP PDU.
3. The Lower Tester sends an ATT_READ_REQ PDU to the IUT.
4. The IUT sends an ATT_READ_RSP PDU that contains the 1 octet from Step 1.

5. The Lower Tester sends an ATT_PREPARE_WRITE_REQ PDU to the IUT with the Offset set to 0 and Length set to 1.
6. The IUT sends an ATT_PREPARE_WRITE_RSP PDU to the Lower Tester with a Value Offset and Part Attribute Value.
7. The Lower Tester sends an ATT_PREPARE_WRITE_REQ PDU to the IUT with the Offset set to 5 and Length set to 18.
8. The IUT sends an ATT_PREPARE_WRITE_RSP PDU to the Lower Tester with a Value Offset and Part Attribute Value.
9. The Lower Tester sends an ATT_EXECUTE_WRITE_REQ PDU to the IUT with Flags set to 0x01.
10. The IUT sends an ATT_ERROR_RSP PDU with Request Opcode in Error set to 0x18 and Error Code set to 0x07.

- Expected Outcome

  Pass verdict

  The IUT sends an ATT_ERROR_RSP PDU (code 0x01) to the Lower Tester, with the Request Opcode in Error parameter set to 0x18, the Attribute Handle in Error parameter set to the handle sent by the Lower Tester, and Error Code set to 0x07 (“Invalid Offset”).

  The IUT responds within the applicable timeout (Section 3.3.3 of ATT [5]).

GATT/CL/GAW/BV-06-C [Characteristic Value Reliable Write – by Client]

- Test Purpose

  Verify that a Generic Attribute Profile client can reliably write a characteristic selected by handle.

- Reference

  [1] 4.9.5

  [5] 3.4.6.1, 3.4.6.2, 3.4.6.3, 3.4.6.4

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.4 is used to set up an encrypted link.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The Lower Tester contains at least one valid characteristic and the handle of this characteristic is known to the IUT.
  - The characteristic has sufficient permissions to allow writing.
  - If the characteristic permissions require a specific security mode and level, execute pairing and/or bonding with the required security mode and level.

- Test Procedure

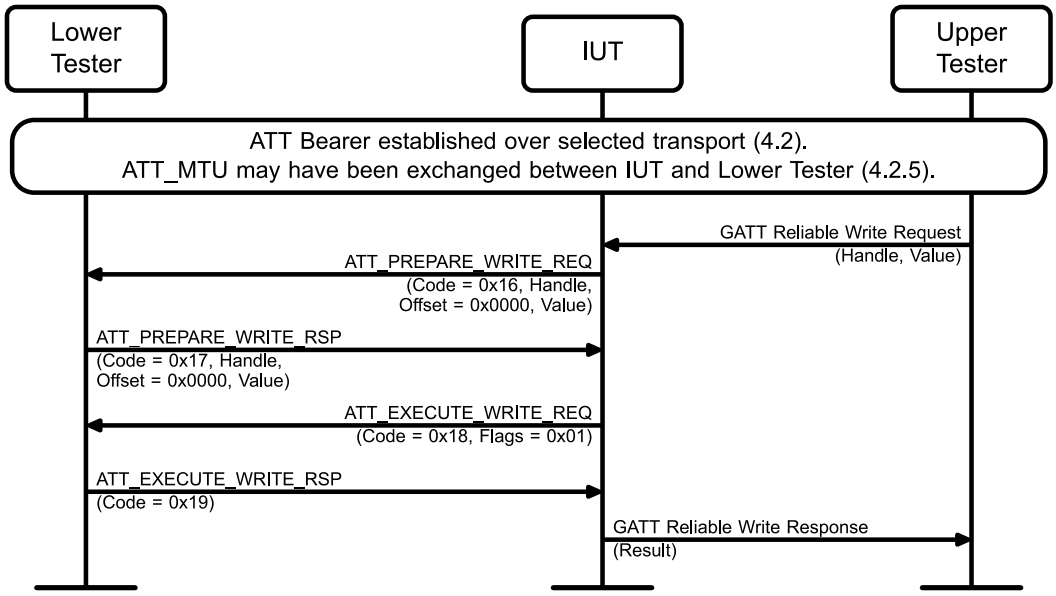


Figure 4.57: GATT/CL/GAW/BV-06-C [Characteristic Value Reliable Write – by Client] MSC

1. The Upper Tester sends a command to the IUT to request a reliable write of the selected characteristic with a new value, e.g., GATT Reliable Write Request(Handle, new Value).
2. The IUT sends an ATT_PREPARE_WRITE_REQ PDU to the Lower Tester.
3. The Lower Tester sends the IUT an ATT_PREPARE_WRITE_RSP PDU.
4. The IUT sends an ATT_EXECUTE_WRITE_REQ PDU to the Lower Tester.
5. The Lower Tester sends the IUT an ATT_EXECUTE_WRITE_RSP PDU.
6. The IUT reports the valid response to the Upper Tester, e.g., GATT Reliable Write Response.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends a correctly formatted ATT_PREPARE_WRITE_REQ PDU (0x16) to the Lower Tester. The command specifies the handle, offset, and the value of the characteristic to be written.

  In Step 4, the IUT sends a correctly formatted ATT_EXECUTE_WRITE_REQ PDU (0x18) to the Lower Tester. The flags are set to 0x01 (Immediately write all pending prepared values).

  The IUT receives the response from the Lower Tester and, in Step 6, sends the GATT Reliable Write Response to the Upper Tester.

  The size of the ATT_PREPARE_WRITE_REQ PDU does not exceed any negotiated ATT_MTU.

GATT/SR/GAW/BV-06-C [Characteristic Value Reliable Writes - to Server]

- Test Purpose

  Verify that a Generic Attribute Profile server can support reliable writing to a Characteristic Value selected by handle.

- Reference

  [1] 4.9.5

  [5] 3.4.6.1, 3.4.6.2, 3.4.6.3, 3.4.6.4

- Initial Condition
  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The IUT contains a valid characteristic and the handle of this characteristic is known to the test system.
  - The Lower Tester has the necessary security permissions to write the value of the characteristic of the IUT.
- Test Procedure

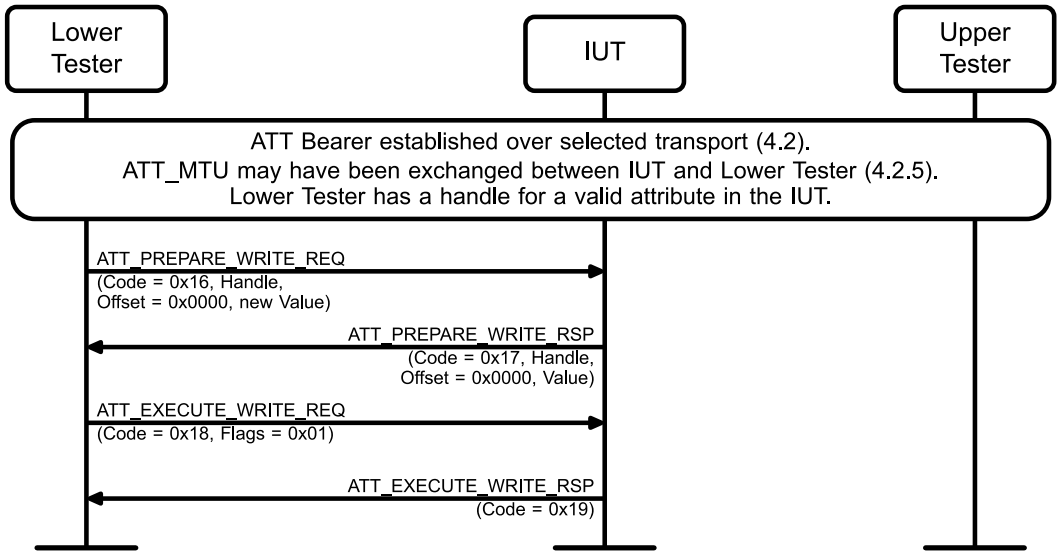


Figure 4.58: GATT/SR/GAW/BV-06-C [Characteristic Value Reliable Writes - to Server] MSC

1. The Lower Tester sends an ATT_PREPARE_WRITE_REQ PDU to the IUT to prepare to write the value of a characteristic. The ATT_PREPARE_WRITE_REQ PDU specifies the handle of the characteristic to be written and the value of the characteristic to be written.
2. The IUT sends an ATT_PREPARE_WRITE_RSP PDU to the Lower Tester, with the correct offset and value.
3. The Lower Tester sends an ATT_EXECUTE_WRITE_REQ PDU to the IUT with Flags = 0x01.
4. The IUT sends an ATT_EXECUTE_WRITE_RSP PDU to the Lower Tester.

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_PREPARE_WRITE_RSP PDU to the Lower Tester. The offset, handle, and value sent in the response match those sent in the request.

  The IUT sends a correctly formatted ATT_EXECUTE_WRITE_RSP PDU to the Lower Tester.

  All of the IUT's responses occur within the applicable timeout (Section 3.3.3 of ATT [5]).

GATT/SR/GAW/BV-10-C [Nested Long Characteristic Value Reliable Writes – to Server]

- Test Purpose

  Verify that a Generic Attribute Profile server can support nested reliable writing to long Characteristic Values selected by handle.

- Reference

  [1] 4.9.5

  [5] 3.4.6.1, 3.4.6.2, 3.4.6.3, 3.4.6.4

- Initial Condition

  - For this test, the server has to support a sufficient number of ATT_PREPARE_WRITE_REQ PDUs and two prepare queues.
  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The IUT contains two writeable valid long characteristics and the handles of these characteristics are known to the test system.
  - The Lower Tester has the necessary security permissions to write the values of the characteristics of the IUT.

- Test Procedure

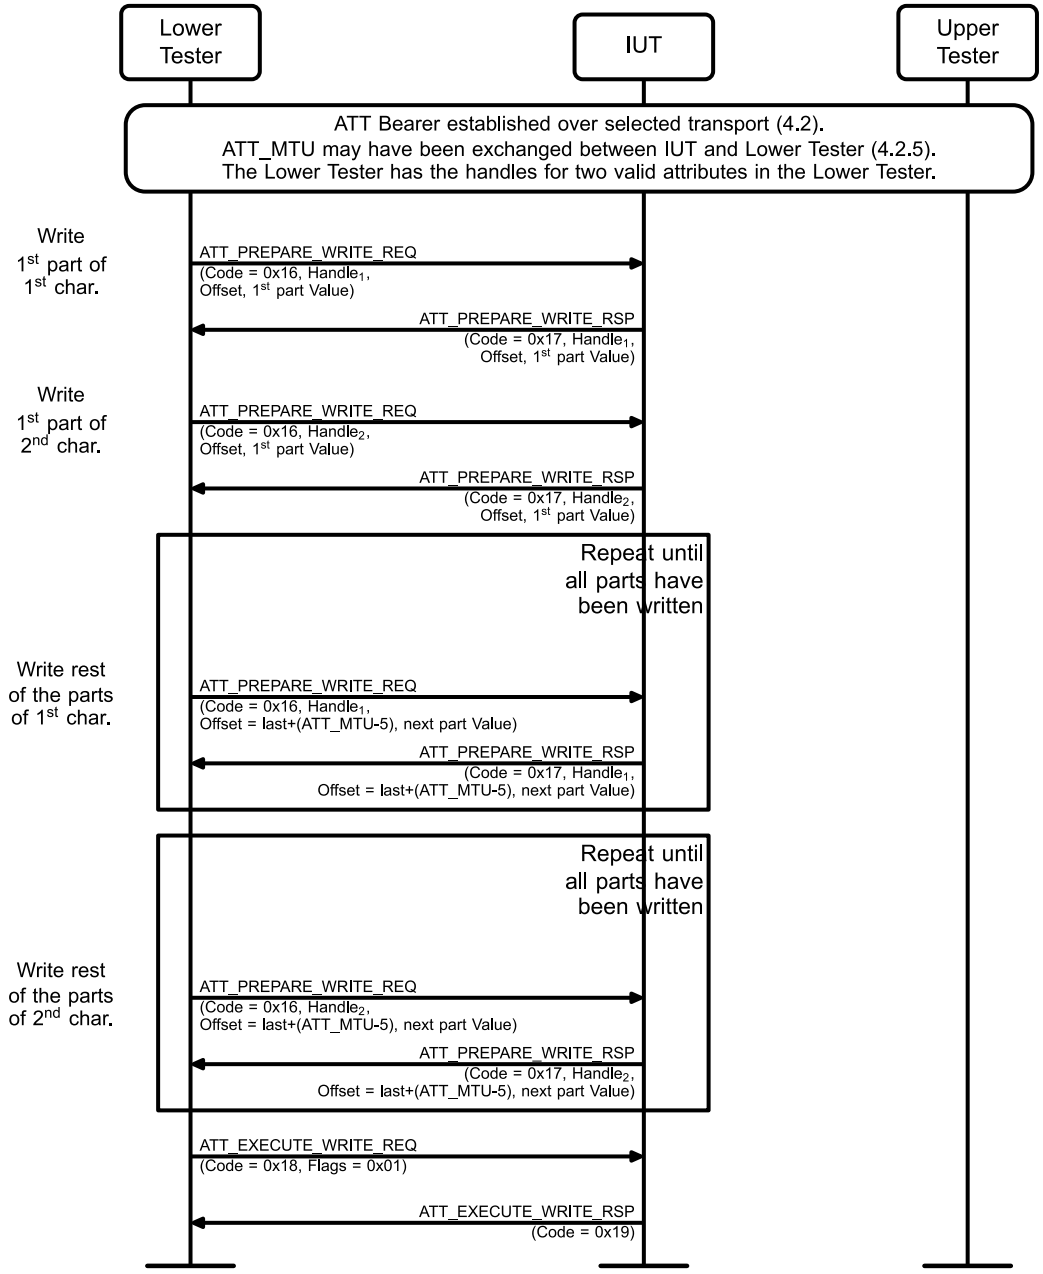


Figure 4.59: GATT/SR/GAW/BV-10-C [Nested Long Characteristic Value Reliable Writes – to Server] MSC

1. The Lower Tester sends an ATT_PREPARE_WRITE_REQ PDU to the IUT to prepare to write the first part value of a first characteristic. The ATT_PREPARE_WRITE_REQ PDU specifies the handle of the first characteristic to be written and the value of the characteristic to be written.
2. The IUT sends an ATT_PREPARE_WRITE_RSP PDU to the Lower Tester, with the first characteristic handle, correct offset and value.
3. The Lower Tester sends an ATT_PREPARE_WRITE_REQ PDU to the IUT to prepare to write the first part value of a second characteristic. The ATT_PREPARE_WRITE_REQ PDU specifies the handle of the second characteristic to be written and the value of the characteristic to be written.
4. The IUT sends an ATT_PREPARE_WRITE_RSP PDU to the Lower Tester, with the second characteristic handle, correct offset and value.

5. Repeat Steps 6–7 until all parts have been written, setting the Offset to Nx(ATT_MTU – 5), with N starting from 1.
6. The Lower Tester sends an ATT_PREPARE_WRITE_REQ PDU to the IUT to write the remaining part values of the first characteristic. The offset, the handle of the characteristic, and the part value to be written are also specified.
7. The IUT sends an ATT_PREPARE_WRITE_RSP PDU to the Lower Tester.
8. The Lower Tester sends ATT_PREPARE_WRITE_REQ PDUs to the IUT to write the remaining part values of the second characteristic, setting the offset to Nx(ATT_MTU – 5), with N starting from 1. The handle of the characteristic to be written and the part value to be written are also specified.
9. The Lower Tester sends an ATT_EXECUTE_WRITE_REQ PDU to the IUT with Flags = 0x01.
10. The IUT sends a correctly formatted ATT_EXECUTE_WRITE_RSP PDU to the Lower Tester.

- Expected Outcome

  Pass verdict

  The IUT sends a series of correctly formatted ATT_PREPARE_WRITE_RSP PDUs to the Lower Tester. The offset, handle, and value sent in each response match those sent in the corresponding request.

  The IUT sends a correctly formatted ATT_EXECUTE_WRITE_RSP PDU to the Lower Tester.

  The responses do not exceed any negotiated ATT_MTU.

  All of the IUT responses occur within the applicable timeout (Section 3.3.3 of ATT [5]).

  The values of the long characteristics stored at handle 1 and handle 2 in the IUT correspond to the values written by the Lower Tester.

GATT/SR/GAW/BV-11-C [Characteristic Value Reliable Writes – No Pending Prepared Write Requests]

- Test Purpose

  Verify that a Generic Attribute Profile server can support reliable writing to a Characteristic Value selected by handle when there are no pending Prepared Write requests.

- Reference

  [1] 4.9.5

  [5] 3.4.6.3, 3.4.6.4

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The IUT contains a valid characteristic and the handle of this characteristic is known to the test system.
  - The Lower Tester has the necessary security permissions to write the value of the characteristic of the IUT.

- Test Procedure

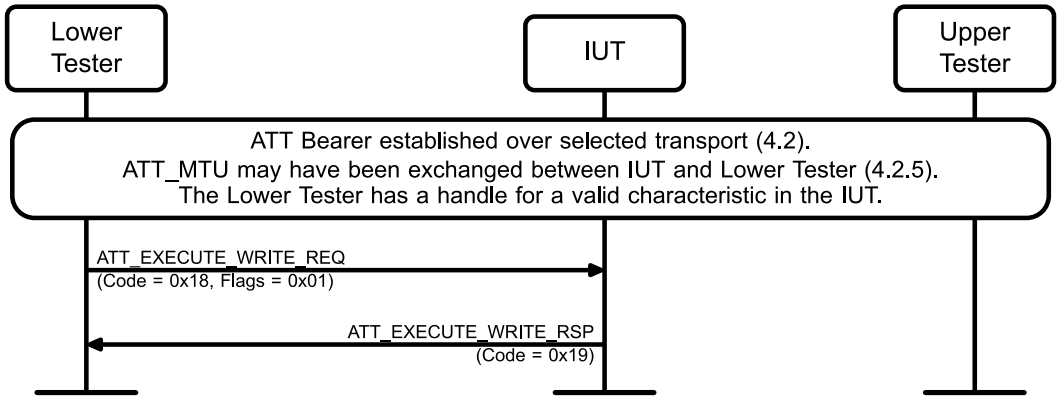


Figure 4.60: GATT/SR/GAW/BV-11-C [Characteristic Value Reliable Writes - No Pending Prepared Write Requests] MSC

1. The Lower Tester sends an ATT_EXECUTE_WRITE_REQ PDU to the IUT with Flags = 0x01.
2. The Lower Tester receives an ATT_EXECUTE_WRITE_RSP PDU from the IUT.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends a correctly formatted ATT_EXECUTE_WRITE_RSP PDU to the Lower Tester.

  The Upper Tester verifies that the IUT does not write new values to the target characteristic.

  All of the IUT's responses occur within the applicable timeout (Section 3.3.3 of ATT [5]).

GATT/SR/GAW/BV-07-C [Cancel Reliable Write Characteristic – from Server]

- Test Purpose

  Verify that a Generic Attribute Profile server can support cancel of a reliable write.

- Reference

  [1] 4.9.5

  [5] 3.4.6.1, 3.4.6.2, 3.4.6.3

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The IUT has at least one valid characteristic. The Lower Tester has sufficient permissions for writing value of this characteristic.

- Test Procedure

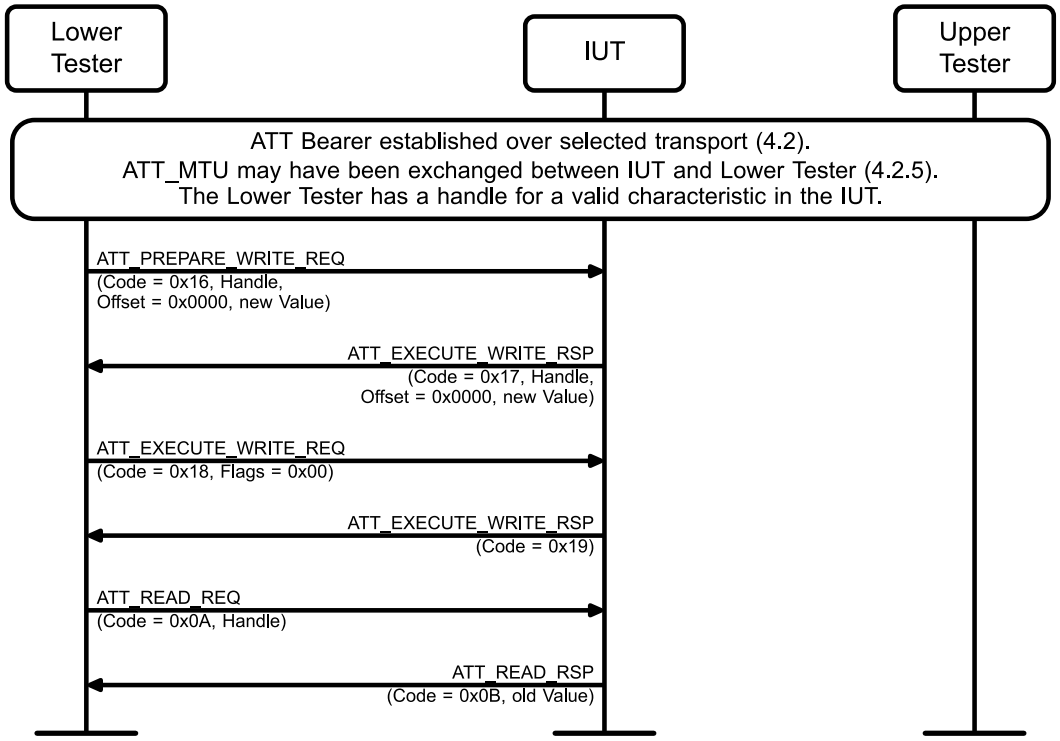


Figure 4.61: GATT/SR/GAW/BV-07-C [Cancel Reliable Write Characteristic – from Server] MSC

1. The Lower Tester sends an ATT_PREPARE_WRITE_REQ PDU to the IUT, with the handle of the characteristic to be written, the offset (0x0000), and the value of the characteristic to be written.
2. The IUT sends an ATT_PREPARE_WRITE_RSP PDU to the Lower Tester.
3. The Lower Tester sends an ATT_EXECUTE_WRITE_REQ PDU to the IUT with the flags set to 0x00 to cancel the pending reliable write.
4. The IUT sends an ATT_EXECUTE_WRITE_RSP PDU to the Lower Tester.
5. The Lower Tester sends an ATT_READ_REQ PDU to verify that the characteristic value has not been written.
6. The IUT sends an ATT_READ_RSP PDU to the Lower Tester with the value of the characteristic.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends a correctly formatted ATT_PREPARE_WRITE_RSP PDU to the Lower Tester. The offset, handle, and value sent in the response match those sent in the request.

  In Step 4, the IUT sends a correctly formatted ATT_EXECUTE_WRITE_RSP PDU to the Lower Tester.

  In Step 6, the IUT sends a correctly formatted ATT_READ_RSP PDU to the Lower Tester containing a value different from the one sent in the ATT_PREPARE_WRITE_REQ PDU.

  All of the IUT's responses occur within the applicable timeout (Section 3.3.3 of ATT [5]).

GATT/CL/GAW/BV-08-C [Write Characteristic Descriptor – by Client]

- Test Purpose

  Verify that a Generic Attribute Profile client can write a characteristic descriptor selected by handle.

- Reference

  [1] 4.12.3

  [5] 3.4.5.1, 3.4.5.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A handle of a characteristic descriptor in the Lower Tester that permits writing is selected.
  - If the characteristic descriptor permissions require a specific security mode and level, execute pairing and/or bonding with the required security mode and level.

- Test Procedure

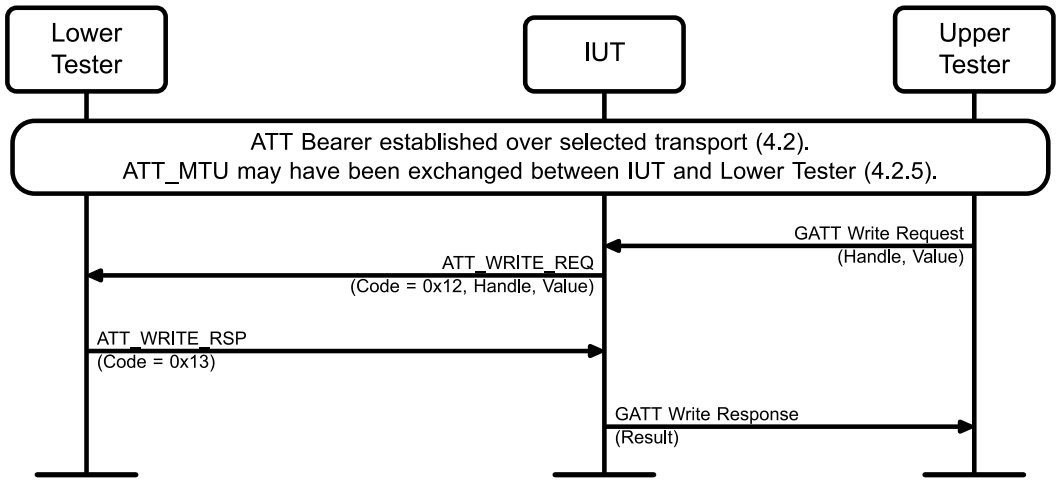


Figure 4.62: GATT/CL/GAW/BV-08-C [Write Characteristic Descriptor – by Client] MSC

1. The Upper Tester sends a command to the IUT to request a write of the selected characteristic with a new value, e.g., GATT Write Request(Handle, New Value).
2. The IUT sends an ATT_WRITE_REQ PDU to the Lower Tester.
3. The Lower Tester sends the IUT an ATT_WRITE_RSP PDU.
4. The IUT reports the result to the Upper Tester, e.g., GATT Write Response.

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_WRITE_REQ PDU to the Lower Tester, specifying the value that is to be written from the Upper Tester.

  The Characteristic handle parameter is set to a valid handle.

The size of the ATT_WRITE_REQ PDU does not exceed any negotiated ATT_MTU.

The IUT receives the response from the Lower Tester and sends the GATT Write Response to the Upper Tester.

GATT/SR/GAW/BV-08-C [Write Characteristic Descriptor – from Server]

- Test Purpose

  Verify that a Generic Attribute Profile server can support writing a characteristic descriptor selected by handle.

- Reference

  [1] 4.12.3

  [5] 3.4.5.1, 3.4.5.2

- Initial Condition
  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A handle of a characteristic descriptor in the IUT that permits writing is selected.
  - The Lower Tester has the necessary security permissions from the IUT to read and write the characteristic descriptor.

- Test Procedure

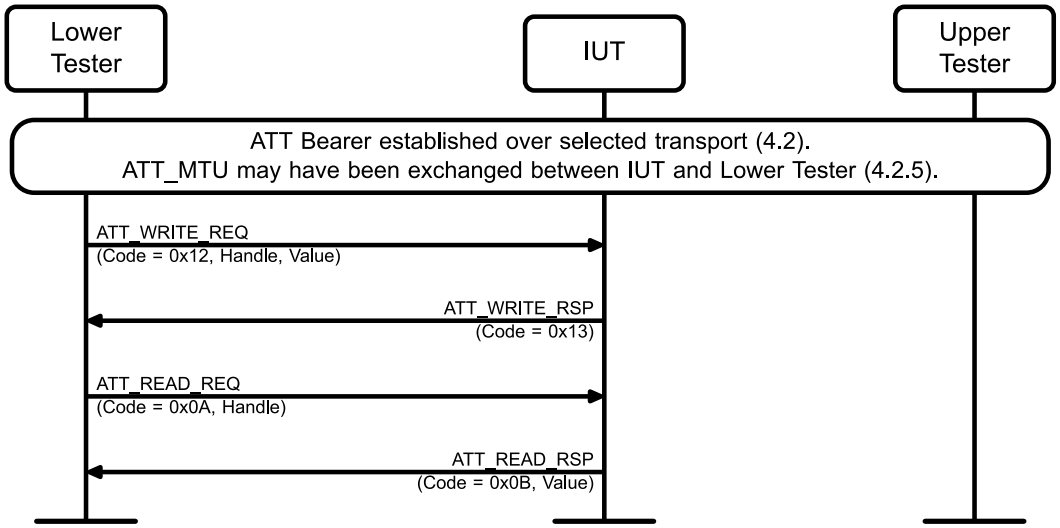


Figure 4.63: GATT/SR/GAW/BV-08-C [Write Characteristic Descriptor – from Server] MSC

1. The Lower Tester sends an ATT_WRITE_REQ PDU to the IUT, containing the selected handle and value.
2. The IUT sends an ATT_WRITE_RSP PDU to the Lower Tester.
3. The Lower Tester sends an ATT_READ_REQ PDU to the IUT, containing the handle in Step 1.
4. The IUT sends an ATT_READ_RSP PDU to the Lower Tester, with the content of the Characteristic Descriptor.

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_WRITE_RSP PDU to the Lower Tester.

  The IUT sends an ATT_READ_RSP PDU reporting the same value delivered in the ATT_WRITE_REQ PDU.

  The IUT responds within the applicable timeout (Section 3.3.3 of ATT [5]).

GATT/CL/GAW/BI-32-C [Cancel Reliable Write Characteristic – by Client]

- Test Purpose

  Verify that a Generic Attribute Profile client will cancel a reliable write after receiving an invalid ATT_PREPARE_WRITE_REQ from the server.

- Reference

  [1] 4.9.5

  [5] 3.4.6

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A handle of a Characteristic Value in the Lower Tester that permits writing is selected.
  - If the characteristic descriptor permissions require a specific security mode and level, execute pairing and/or bonding with the required security mode and level.

- Test Procedure

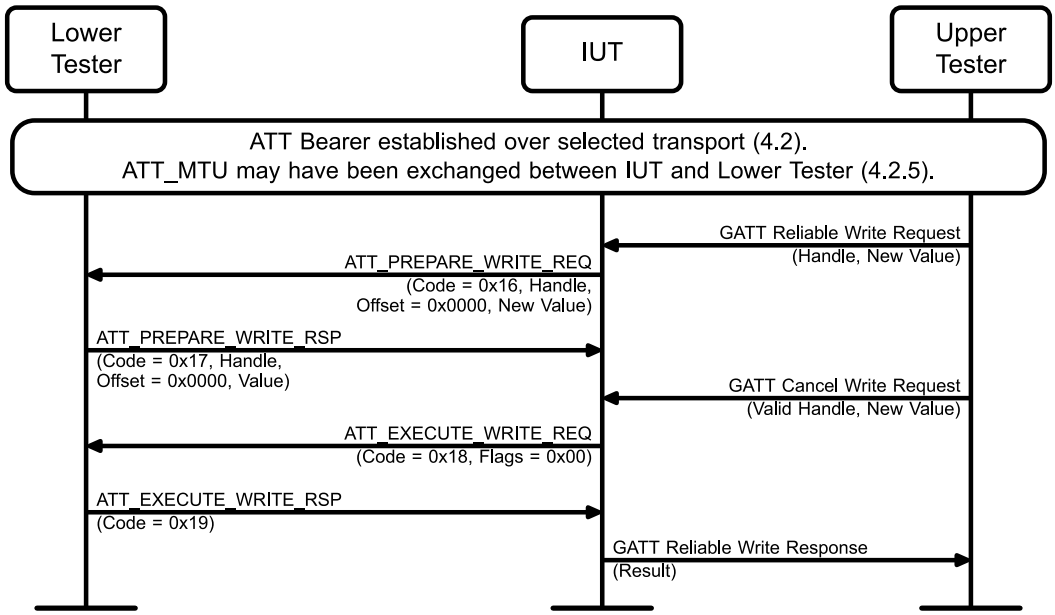


Figure 4.64: GATT/CL/GAW/BI-32-C [Cancel Reliable Write Characteristic – by Client] MSC

1. The Upper Tester sends a command to the IUT to request that the Lower Tester prepare to write a value to that characteristic, e.g., GATT Prepare Write Request(Handle, New Value).
2. The IUT sends an ATT_PREPARE_WRITE_REQ PDU to the Lower Tester, containing the new characteristic value.
3. The Lower Tester responds with an ATT_PREPARE_WRITE_RSP PDU, where the new value parameter is corrupted, i.e., not equal to the value parameter sent in the corresponding ATT_PREPARE_WRITE_REQ PDU.
4. The IUT sends an ATT_EXECUTE_WRITE_REQ PDU with the flag parameter set to 0x00 (cancel all prepared writes).
5. The Lower Tester sends a correctly formatted ATT_EXECUTE_WRITE_RSP PDU to the IUT.
6. The IUT informs the Upper Tester that the requested write operation was canceled.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends a correctly formatted ATT_PREPARE_WRITE_REQ PDU (0x16) to the Lower Tester. The command specifies the handle of the characteristic to be written, the offset (0x0000) and the value of the characteristic to be written.

  In Step 4, after the IUT receives the ATT_PREPARE_WRITE_RSP PDU with an incorrect value parameter, it sends an ATT_EXECUTE_WRITE_REQ PDU (0x18) with the flag parameter = 0x00, to cancel the write operation.

  The IUT receives the ATT_EXECUTE_WRITE_RSP PDU from the Lower Tester and sends an acknowledgment to the Upper Tester, e.g., GATT Prepare Write Response with a result indicating that the write was not completed.

GATT/SR/GAW/BI-32-C [Write Characteristic Value – Attribute Value Length Too Long]

- Test Purpose

  Verify that a Generic Attribute Profile server can detect a Write Characteristic Request with a characteristic/descriptor value length that is too long and issue an Invalid Attribute Value Length response.

- Reference

  [1] 4.9.3

  [5] 3.4.5.1, 3.4.5.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A handle of a Characteristic Value in the IUT that permits writing is selected. The size of the characteristic is known; the Lower Tester will deliberately send a value that is longer than the size specified for that characteristic.
  - The Lower Tester has the necessary security permissions from the IUT to read and write the characteristic.

- Test Procedure

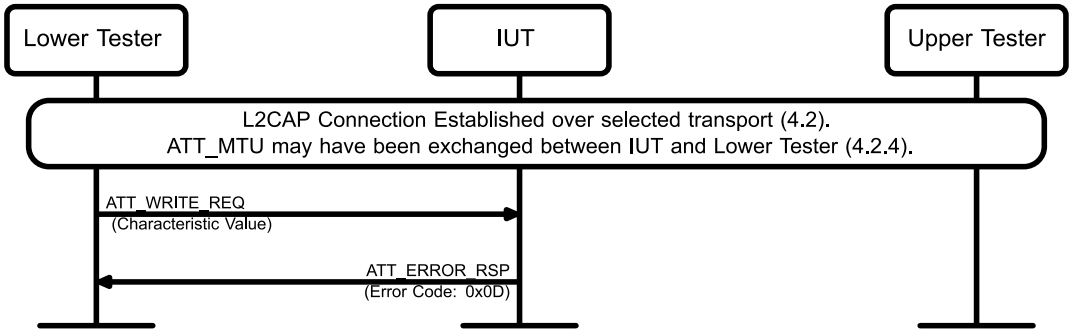


Figure 4.65: GATT/SR/GAW/BI-32-C [Write Characteristic Value – Attribute Value Length Too Long] MSC

1. Perform either alternative 1A or 1B depending on the attribute length type.
   Alternative 1A (Variable Length attribute):
   - 1A.1 The Lower Tester sends an ATT_WRITE_REQ to the IUT with the Characteristic Value length greater than the maximum valid attribute length and all other valid parameters.

   Alternative 1B (Fixed Length attribute):
   - 1B.1 The Lower Tester sends an ATT_WRITE_REQ to the IUT with the Characteristic Value length greater than the valid attribute length and all other valid parameters.
2. The IUT sends an ATT_ERROR_RSP to the Lower Tester with Error Code set to 0x0D “Invalid Attribute Value Length”.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends a correctly formatted ATT_ERROR_RSP with Error Code set to 0x0D “Invalid Attribute Value Length”.

  The IUT responds within the applicable timeout (Section 3.3.3 of ATT [5]).

GATT/SR/GAW/BI-33-C [Write Long Characteristic Value – Attribute Value Length Too Long]

- Test Purpose

  Verify that a Generic Attribute Profile server can detect a Write Long Characteristic Request with a characteristic/descriptor value length that is too long and issue an Invalid Attribute Value Length response.

- Reference

  [1] 4.9.4

  [5] 3.4.6.1, 3.4.6.2, 3.4.6.3, 3.4.6.4

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.

- The IUT contains a valid characteristic and the handle of this characteristic is known to the test system. The size of the characteristic is known; the Lower Tester will deliberately send a value that is longer than the size specified for that characteristic.
- The Lower Tester has the necessary security permissions to write the value of the characteristic of the IUT.

- Test Procedure

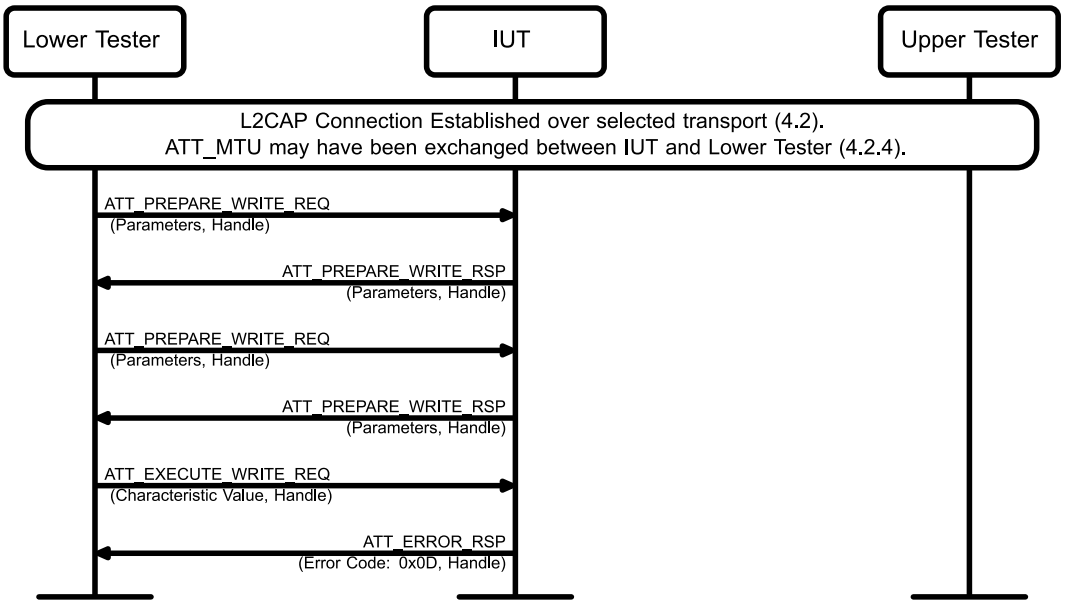


Figure 4.66: GATT/SR/GAW/BI-33-C [Write Long Characteristic Value – Attribute Value Length Too Long] MSC

1. The Lower Tester sends an ATT_PREPARE_WRITE_REQ PDU to the Lower Tester with all valid parameters.
2. The IUT responds with an ATT_PREPARE_WRITE_RSP PDU with valid parameters.
3. The Lower Tester sends an ATT_PREPARE_WRITE_REQ PDU to the Lower Tester with all valid parameters.
4. The IUT responds with an ATT_PREPARE_WRITE_RSP PDU with valid parameters.
5. The Lower Tester sends an ATT_EXECUTE_WRITE_REQ PDU to the Lower Tester with an Attribute Value that is too long, and all other valid parameters.
6. The IUT sends an ATT_ERROR_RSP to the Lower Tester with Error Code set to 0x0D “Invalid Attribute Value Length”.

- Expected Outcome

  Pass verdict

  In Step 6, the IUT sends an ATT_ERROR_RSP with Error Code set to 0x0D “Invalid Attribute Value Length”.

  The responses do not exceed any negotiated ATT_MTU.

  All of the IUT responses occur within the applicable timeout (Section 3.3.3 of ATT [5]).

4.7.7 Write Characteristic Value – Attribute Value Length Too Long

- Test Purpose

  Verify that a Generic Attribute Profile server can detect an ATT_WRITE_CMD or ATT_SIGNED_WRITE_CMD request with a characteristic/descriptor value length that is too long and performs the correct behavior.

- Reference

  [1] 4.9.1, 4.9.2

  [5] 3.4.6.1, 3.4.6.2, 3.4.6.3, 3.4.6.4

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The IUT contains a valid characteristic, and the handle of this characteristic is known to the test system. The size of the characteristic is known; the Lower Tester will deliberately send a value that is longer than the size specified for that characteristic.
  - The Lower Tester has the necessary security permissions to read and write the value of the characteristic of the IUT.
  - Additional Initial Conditions are specified in Table 4.33.

- Test Case Configuration

Test Case	Additional Initial Conditions	Request PDU
GATT/SR/GAW/BI-39-C [Write Characteristic Value – Attribute Value Length Too Long]	None	ATT_WRITE_CMD
GATT/SR/GAW/BI-40-C [Write Characteristic Value – Attribute Value Length Too Long, signed]	The ATT bearer is not encrypted. The Lower Tester and the IUT are bonded.	ATT_SIGNED_WRITE_CMD

Table 4.33: Write Characteristic Value – Attribute Value Length Too Long test cases

- Test Procedure

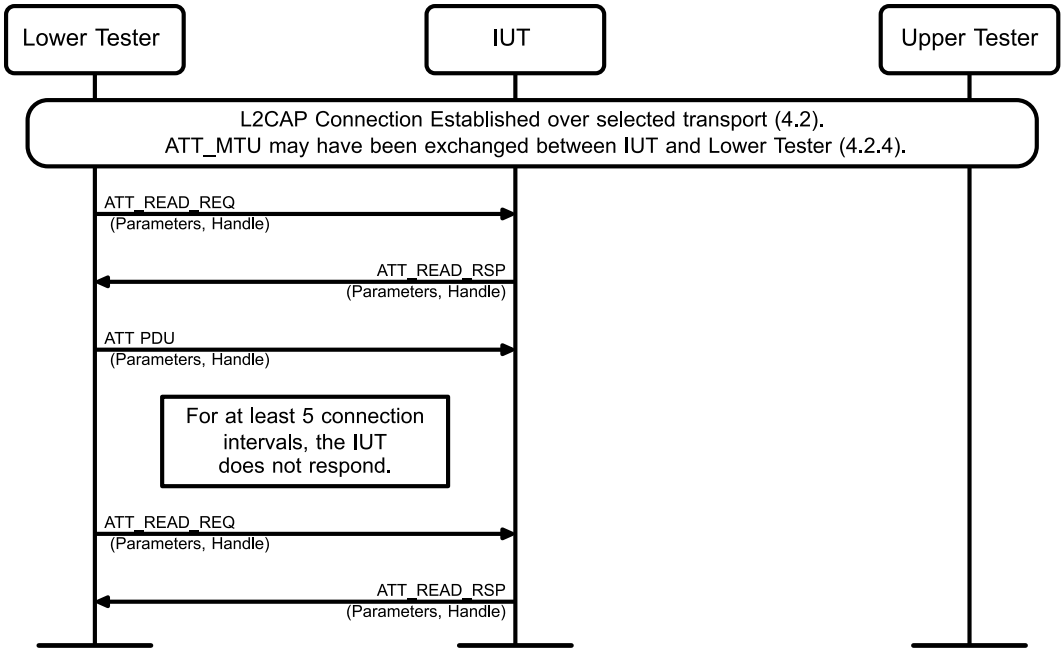


Figure 4.67: Write Characteristic Value – Attribute Value Length Too Long MSC

1. The Lower Tester sends an ATT_READ_REQ with a valid Attribute Handle of TSPX_characteristic_value.
2. The IUT responds with an ATT_READ_RSP.
3. The Lower Tester sends the ATT PDU specified in Table 4.33 to the Lower Tester with a Characteristic Value that is too long, and all other valid parameters.
4. Wait at least five connection intervals. The IUT does not send any message to the Lower Tester during this time.
5. The Lower Tester sends an ATT_READ_REQ for the Attribute Handle sent in Step 1.
6. The IUT responds with an ATT_READ_RSP with all parameters the same as in Step 2.

- Expected Outcome

  Pass verdict

  In Step 4, the IUT does not send a message to the Lower Tester.

  In Step 6, the IUT sends the same PDU and parameters as in Step 2.

4.7.8 Multiple prepare writes over multiple bearers

- Test Purpose

  Verify that a Generic Attribute Profile server can support multiple prepare writes sent over multiple bearers, queue them, and then execute according to the request.

- Reference

  [11] 4.9.4

  [12] 3.4.6.1, 3.4.6.3

- Initial Condition
  - The IUT sets the EATT Supported bit to 1 in the Server Supported Features characteristic.
  - The IUT supports a sufficient number of ATT_PREPARE_WRITE_REQ commands.
  - The IUT supports a sufficient number of ATT bearers.
  - The IUT contains a valid long characteristic of maximum size (512), and the handle of this characteristic is known to the Lower Tester.
  - A preamble procedure defined in Section 4.2.1.3 or, respectively, Section 4.2.1.4, is used to set up the transport and at least two L2CAP channels.
  - A preamble procedure defined in Section 4.2.3.1 is used to inform the IUT that the Lower Tester supports the Enhanced ATT bearer feature.
  - The Lower Tester MTU is configured to a value (lower than 512); this will ensure that the Lower Tester performs several Prepare Writes.
  - The Lower Tester has the necessary security permissions to write the values of the characteristics of the IUT.
- Test Case Configuration

Test Case	Flags	Characteristic Value
GATT/SR/GAW/BV-12-C [Multiple prepare writes over multiple bearers]	0x01	Updated
GATT/SR/GAW/BV-13-C [Multiple prepare writes over multiple bearers – cancel all writes]	0x00	Unchanged

Table 4.34: Multiple prepare writes over multiple bearers test cases

- Test Procedure

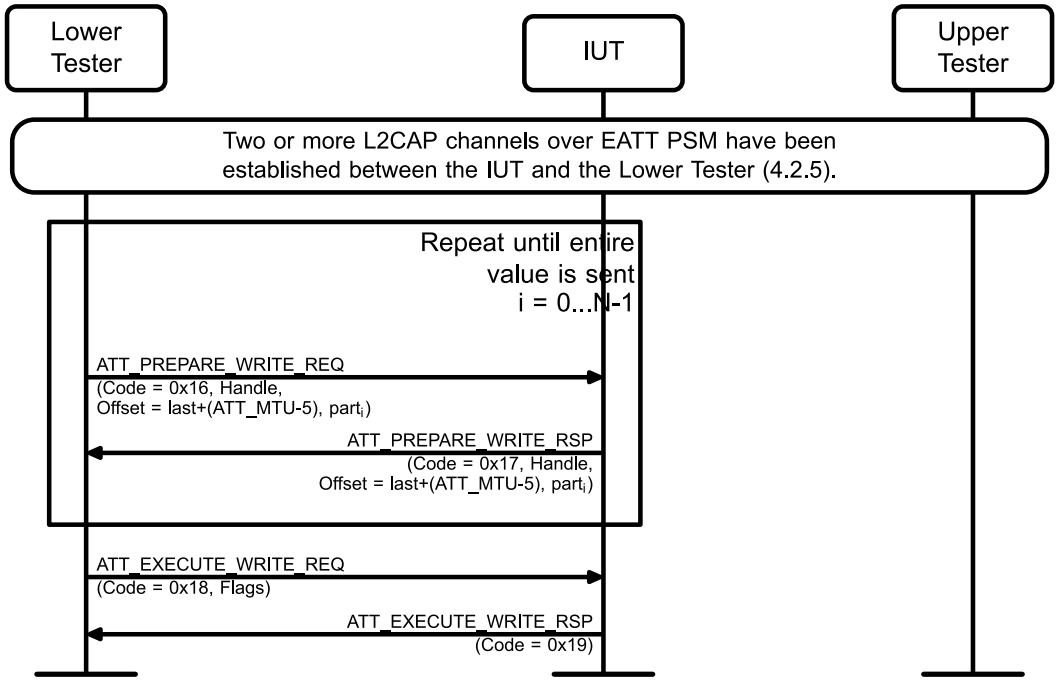


Figure 4.68: Multiple prepare writes over multiple bearers MSC

1. The Lower Tester sends consecutive ATT_PREPARE_WRITE_REQ (Code = 0x16) PDUs to the IUT to prepare to write all the parts of the characteristic value. The requests are sent sequentially on all the opened L2CAP channels, with rollover, starting with the first opened L2CAP channel.

   The ATT_PREPARE_WRITE_REQ PDUs specify the handle of the characteristic to be written and the part of the characteristic to be written.

   For the remaining parts of the characteristic values, the offset is set to Nx(MTU – 5), with N starting from 1.

2. The IUT sends an ATT_PREPARE_WRITE_RSP (Code = 0x17) PDU to the Lower Tester, on the same channel as the received request.
3. Repeat Steps 1–2 until the entire value of the long characteristic is sent to the IUT.
4. The Lower Tester sends an ATT_EXECUTE_WRITE_REQ (Code = 0x18) PDU to the IUT with Flags set as indicated in Table 4.34, on any opened L2CAP channel.
5. The IUT sends an ATT_EXECUTE_WRITE_RSP (Code = 0x19) PDU to the Lower Tester, on the same channel as the received request.

- Expected Outcome

  Pass verdict

  The IUT sends a series of correctly formatted ATT_PREPARE_WRITE_RSP PDUs to the Lower Tester. The offset, handle, and value sent in each response match those sent in the corresponding request.

  The IUT sends a correctly formatted ATT_EXECUTE_WRITE_RSP PDU to the Lower Tester.

  The value of the long characteristic stored at the indicated handle in the IUT is as indicated in Table 4.34.

GATT/SR/GAW/BV-14-C [Multiple prepare writes over multiple bearers – fallback to remaining bearers]

- Test Purpose

  Verify that a Generic Attribute Profile server that supports multiple prepare writes sent over multiple bearers, after some of the bearers disconnect, is able to queue the remaining prepare writes on the remaining bearers and then execute properly.

- Reference

  [11] 4.9.4

  [12] 3.4.6.1, 3.4.6.3

- Initial Condition
  - The IUT sets the EATT Supported bit set to 1 in the Server Supported Features characteristic.
  - The server has to support a sufficient number of ATT_PREPARE_WRITE_REQ PDUs.
  - The IUT has to support a sufficient number of ATT bearers.
  - The IUT contains a valid writable long characteristic of maximum size (512), and the handle of this characteristic is known to the IUT.
  - The Lower Tester MTU is configured to a value (lower than 512); this will ensure that the Lower Tester performs several Prepare Writes.

- A preamble procedure defined in Section 4.2.1.3 or, respectively, Section 4.2.1.4 is used to set up the transport and at least two L2CAP channels.
- A preamble procedure defined in Section 4.2.3.1 is used to inform the IUT that the Lower Tester supports the Enhanced ATT bearer feature.
- The Lower Tester has the necessary security permissions to write the values of the characteristics of the IUT.

- Test Procedure

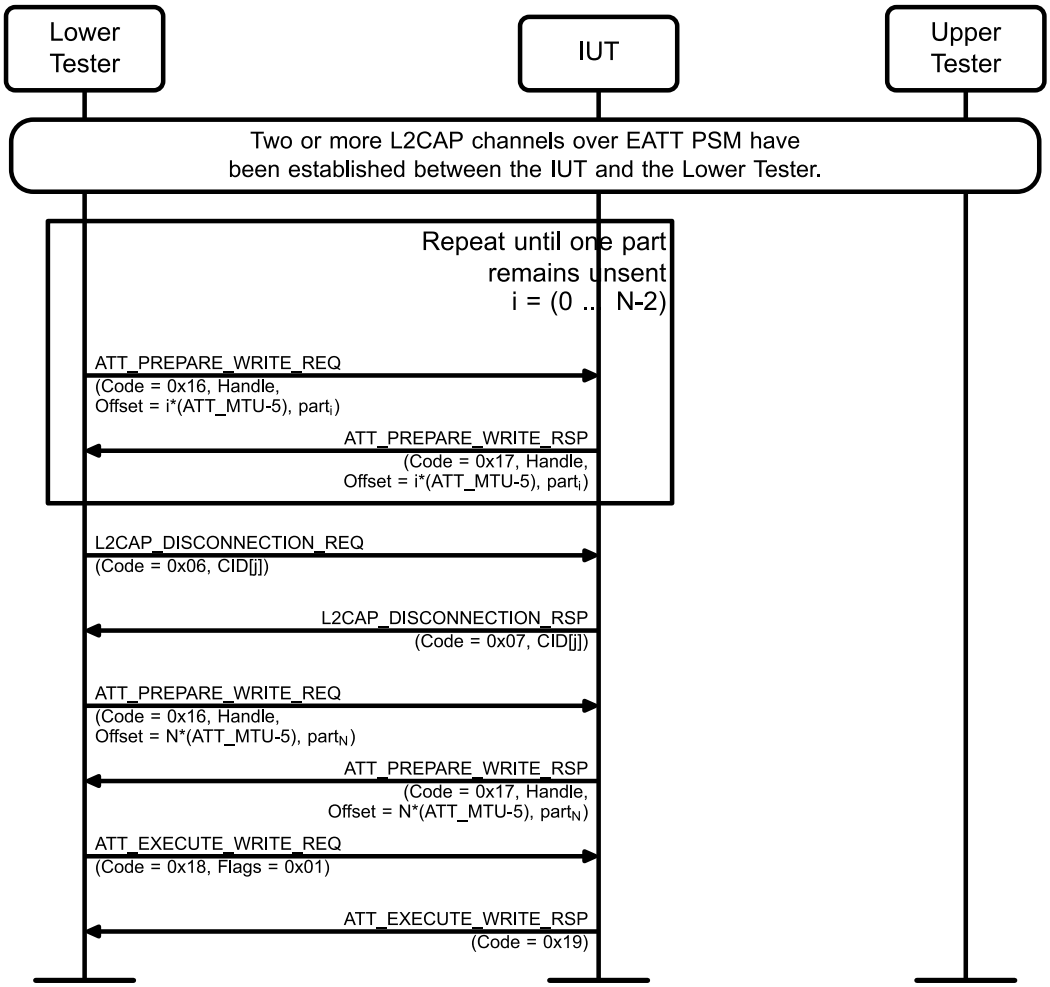


Figure 4.69: GATT/SR/GAW/BV-14-C [Multiple prepare writes over multiple bearers – fallback to remaining bearers] MSC

1. Repeat Steps 2–3 until there remains one part to be sent.
2. The Lower Tester sends consecutive ATT_PREPARE_WRITE_REQ PDUs to the IUT to prepare to write all the parts of the characteristic value. The requests are sent sequentially on all the opened L2CAP channels, with rollover, starting with the first opened L2CAP channel.

   The ATT_PREPARE_WRITE_REQ PDUs specify the handle of the characteristic to be written and the part of the characteristic to be written.

   For the remaining parts of the characteristic values, the offset is set to Nx(MTU – 5), with N starting from 1.
3. The IUT sends ATT_PREPARE_WRITE_RSP PDUs to the Lower Tester, on the same channel as the received request.

4. The Lower Tester sends an L2CAP_DISCONNECTION_REQ PDU (Code = 0x06) to the IUT with the L2CAP channel received from the sequence in Step 2.
5. The IUT sends an L2CAP_DISCONNECTION_RSP PDU (Code = 0x07) to the Lower Tester.
6. The Lower Tester sends an ATT_PREPARE_WRITE_REQ PDU to the IUT to prepare to write the last part of the characteristic value, on one of the remaining bearers.
7. The IUT sends an ATT_PREPARE_WRITE_RSP PDU to the Lower Tester, on the same channel as the received request.
8. The Lower Tester sends an ATT_EXECUTE_WRITE_REQ PDU (Code = 0x18) to the IUT with Flags = 0x01, on any opened L2CAP channel.
9. The IUT sends an ATT_EXECUTE_WRITE_RSP PDU (Code = 0x19) to the Lower Tester, on the same channel as the received request.

- Expected Outcome

  Pass verdict

  The IUT sends a series of correctly formatted ATT_PREPARE_WRITE_RSP PDUs to the Lower Tester. The offset, handle, and value sent in each response match those sent in the corresponding request.

  The IUT sends a correctly formatted ATT_EXECUTE_WRITE_RSP PDU to the Lower Tester.

  The value of the long characteristic stored at the indicated handle in the IUT corresponds to the value written by the Lower Tester.

4.7.9 Signed Write Without Response – to Server

- Test Purpose

  Verify that a Generic Attribute Profile server rejects a Signed Write Without Response command received on an ATT bearer over BR/EDR or on an Enhanced ATT bearer (BR/EDR or LE).

- Reference

  [11] 4.2, 4.9.2

  [12] 3.4, 3.4.5.4, 3.4.9

- Initial Condition

  - A preamble procedure defined in Section 4.2.1.1, 4.2.1.3, or 4.2.1.4 is used to set up the transport and L2CAP channel over the relevant bearer.
  - A handle of a Characteristic Value in the IUT that permits reading and writing is selected.
  - The Lower Tester is bonded with the IUT, so it has the necessary security permissions from the IUT to read and write a Characteristic Value.

- Test Case Configuration

Test Case	Transport	Bearer
GATT/SR/GAW/BI-36-C	BR/EDR	ATT
GATT/SR/GAW/BI-37-C	BR/EDR	EATT
GATT/SR/GAW/BI-38-C	LE	EATT

Table 4.35: Signed Write Without Response – to Server test cases

- Test Procedure

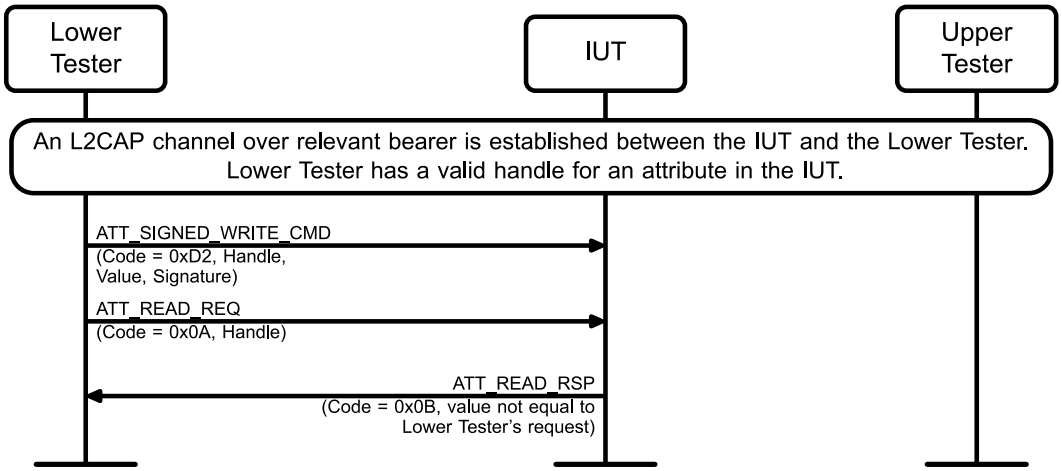


Figure 4.70: Signed Write Without Response – to Server MSC

1. Send an ATT_SIGNED_WRITE_CMD PDU (0xD2, handle, value, signature) from the Lower Tester to the IUT. The value must be different than the current value of that characteristic. The Lower Tester may have already determined the value by reading that value, or it is made known to the Lower Tester another way.
2. The IUT ignores the command and does not write the new value.
3. The Lower Tester sends an ATT_READ_REQ PDU to the IUT to confirm that the value has not been changed.

- Expected Outcome

  Pass verdict

  The IUT ignores the signed write command and does not write to the characteristic.

GATT/SR/GAW/BI-41-C [Write Long Characteristic Value – Database Out of Sync]

- Test Purpose

  Verify that a Generic Attribute Profile server correctly responds to a Write Long Characteristic Request when the database is out of sync.

- Reference

  [1] 4.9.3

  [5] 3.4.6.1, 3.4.6.2, 3.4.6.4

  [15] 3.4.6.3

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A preamble procedure defined in Section 4.2.6 is used to enable Robust Caching.

- The IUT database contains a valid characteristic, and the handle of this characteristic is known to the test system.
- The Lower Tester has the necessary security permissions to write the value of the characteristic of the IUT.

- Test Procedure

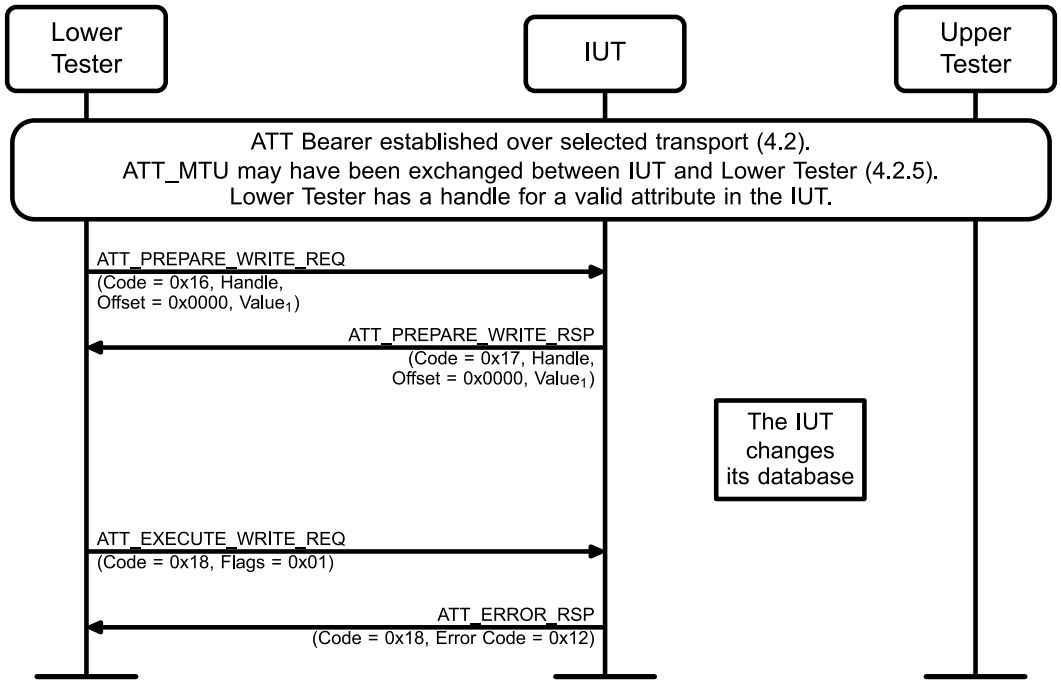


Figure 4.71: GATT/SR/GAW/BI-41-C [Write Long Characteristic Value – Database Out of Sync] MSC

1. The Lower Tester sends an ATT_PREPARE_WRITE_REQ PDU to change the value of the characteristic to a different valid value and receives a successful ATT_PREPARE_WRITE_RSP PDU.
2. The IUT changes its GATT database by removing the attribute changed in Step 1.
3. The Lower Tester sends an ATT_EXECUTE_WRITE_REQ PDU to the IUT for the writeable characteristics changed in Step 1.
4. The IUT sends an ATT_ERROR_RSP PDU with Error Code parameter set to (0x12) *Database Out Of Sync*.

- Expected Outcome

  Pass verdict

  In Step 4, the IUT sends an ATT_ERROR_RSP PDU set to 0x12 Database Out of Sync.

4.8 Notification and Indication

Verify Generic Attribute Profile Notification, Indication, and Confirmation of Characteristic Values.

GATT/CL/GAN/BV-01-C [Characteristic Value Notification - to Client]

- Test Purpose

  Verify that a Generic Attribute Profile client can receive a Characteristic Value Notification and report that to the Upper Tester.

- Reference

  [1] 4.10.1, 4.14

  [5] 3.3.3, 3.4.7.1

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A preamble procedure defined in Section 4.2.2.3 is used to configure the characteristic for Notification.

- Test Procedure

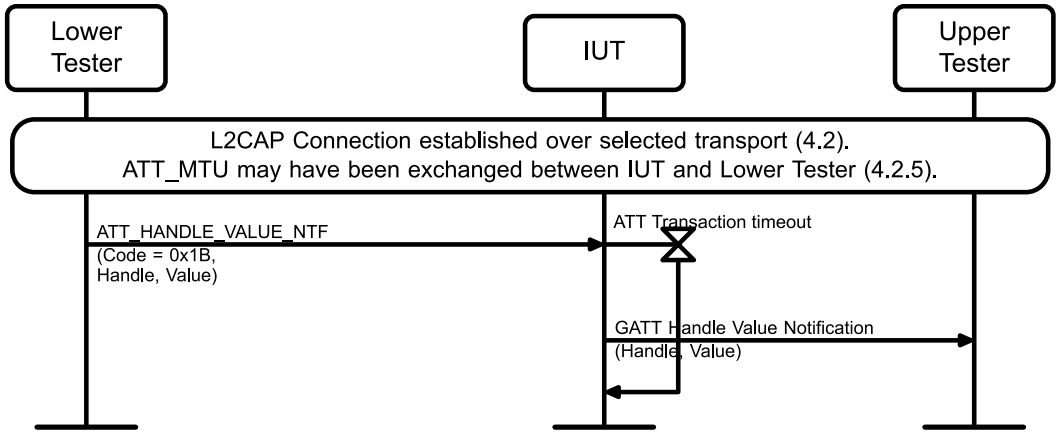


Figure 4.72: GATT/CL/GAN/BV-01-C [Characteristic Value Notification - to Client] MSC

1. The Lower Tester sends an ATT_HANDLE_VALUE_NTF PDU to the IUT, with the Characteristic Handle and Value.
2. The IUT sends a Handle Value Notification to the Upper Tester, e.g., GATT Handle Value Notification with a handle and value to specify the characteristic.

- Expected Outcome

  Pass verdict

  The IUT receives an ATT_HANDLE_VALUE_NTF PDU (0x1B) from the Lower Tester and generates a message to the Upper Tester containing the characteristic handle and value included in that Handle Value Notification, before the Attribute Protocol Transaction timeout expires.

4.8.1 Characteristic Value Notification – by Server

- Test Purpose

  Verify that a Generic Attribute Profile server can send a Characteristic Value Notification and that it retains or resets the configured CCCD after disconnection and reconnection depending on bonding.

- Reference

  [1] 4.10.1

  [5] 3.4.7.1

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A preamble procedure defined in Section 4.2.2.1 is used to configure the characteristic for Notification.
  - If bonding is requested in Table 4.36, then the IUT and the Lower Tester have bonded.
  - If bonding is not requested in Table 4.36, the Lower Tester sets its Bonding_Flags to 0 during the pairing process.

- Test Case Configuration

Test Case	Bond with Lower Tester
GATT/SR/GAN/BV-01-C [Characteristic Value Notification – by Server, no bonding]	No
GATT/SR/GAN/BV-03-C [Characteristic Value Notification – by Server, bonding]	Yes

Table 4.36: Characteristic Value Notification – by Server test cases

- Test Procedure

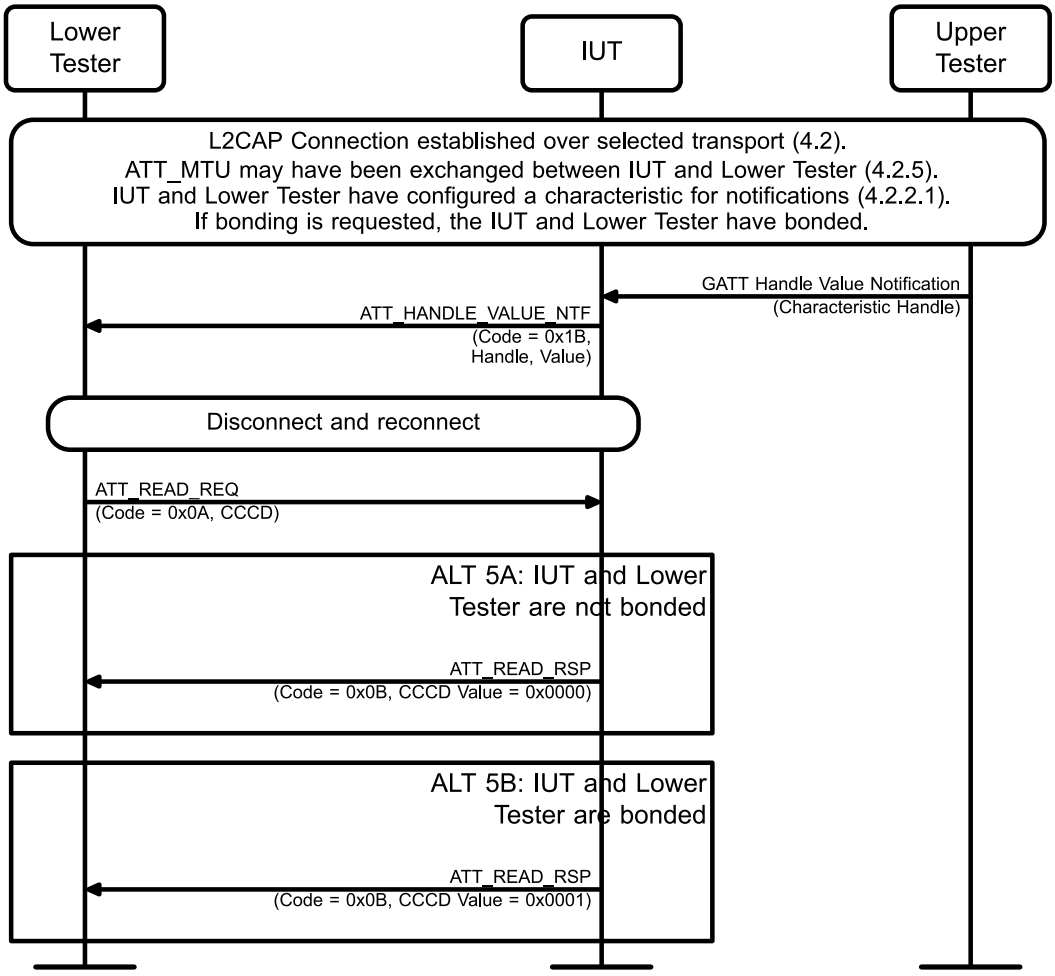


Figure 4.73: Characteristic Value Notification – by Server MSC

1. The Upper Tester orders the IUT to send a notification to the Lower Tester with a handle value set to a specific characteristic.
2. The IUT sends an ATT_HANDLE_VALUE_NTF PDU (Code = 0x1B) to the Lower Tester with handle set to the handle specified in Step 1.
3. The Lower Tester terminates the connection with the IUT, then a new connection is established.
4. The Lower Tester sends an ATT_READ_REQ PDU to the IUT to read the CCCD of the characteristic from Step 2.
5. Perform either alternative 5A or 5B depending on whether the IUT supports bonding as indicated in Table 4.36:

   Alternative 5A (The IUT and the Lower Tester are not bonded):

   5A.1 The IUT sends an ATT_READ_RSP PDU to the Lower Tester with the characteristic's CCCD set to 0x0000.

   Alternative 5B (The IUT and the Lower Tester are bonded):

   5B.1 The IUT sends an ATT_READ_RSP PDU to the Lower Tester with the characteristic's CCCD set to 0x0001.

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_HANDLE_VALUE_NTF PDU (0x1B) to the Lower Tester.

  The Characteristic Handle is set to a valid handle.

  The Characteristic Value is set to the value of a characteristic contained in the IUT identified by the characteristic handle.

  The command size does not exceed any negotiated ATT_MTU.

  The IUT is successfully configured for notification using the procedure specified in Section 4.2.2.1.

  If the IUT and the Lower Tester are not bonded, then the IUT sends an ATT_READ_RSP PDU with the characteristic's CCCD set to 0x0000 when read by the Lower Tester after disconnection and reconnection.

  If the IUT and the Lower Tester are bonded, then the IUT sends an ATT_READ_RSP PDU with the characteristic's CCCD set to 0x0001 when read by the Lower Tester after disconnection and reconnection.

4.8.2 Characteristic Value Indication – by Server

- Test Purpose

  Verify that a Generic Attribute Profile server can send a Characteristic Value Indication and that it retains or resets the configured CCCD after disconnection and reconnection depending on bonding.

- Reference

  [1] 4.11.1

  [5] 3.4.7.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A preamble procedure defined in Section 4.2.2.2 is used to configure the characteristic for Indication.
  - If bonding is requested in Table 4.37, then the IUT and the Lower Tester have bonded.
  - If bonding is not requested in Table 4.37 but encryption is required, the Lower Tester initiates pairing with Bonding_Flags set to 0, regardless of which device initiates pairing.

- Test Case Configuration

Test Case	Bond with Lower Tester
GATT/SR/GAI/BV-01-C [Characteristic Value Indication – by Server, no bonding]	No
GATT/SR/GAI/BV-02-C [Characteristic Value Indication – by Server, bonding]	Yes

Table 4.37: Characteristic Value Indication – by Server test cases

- Test Procedure

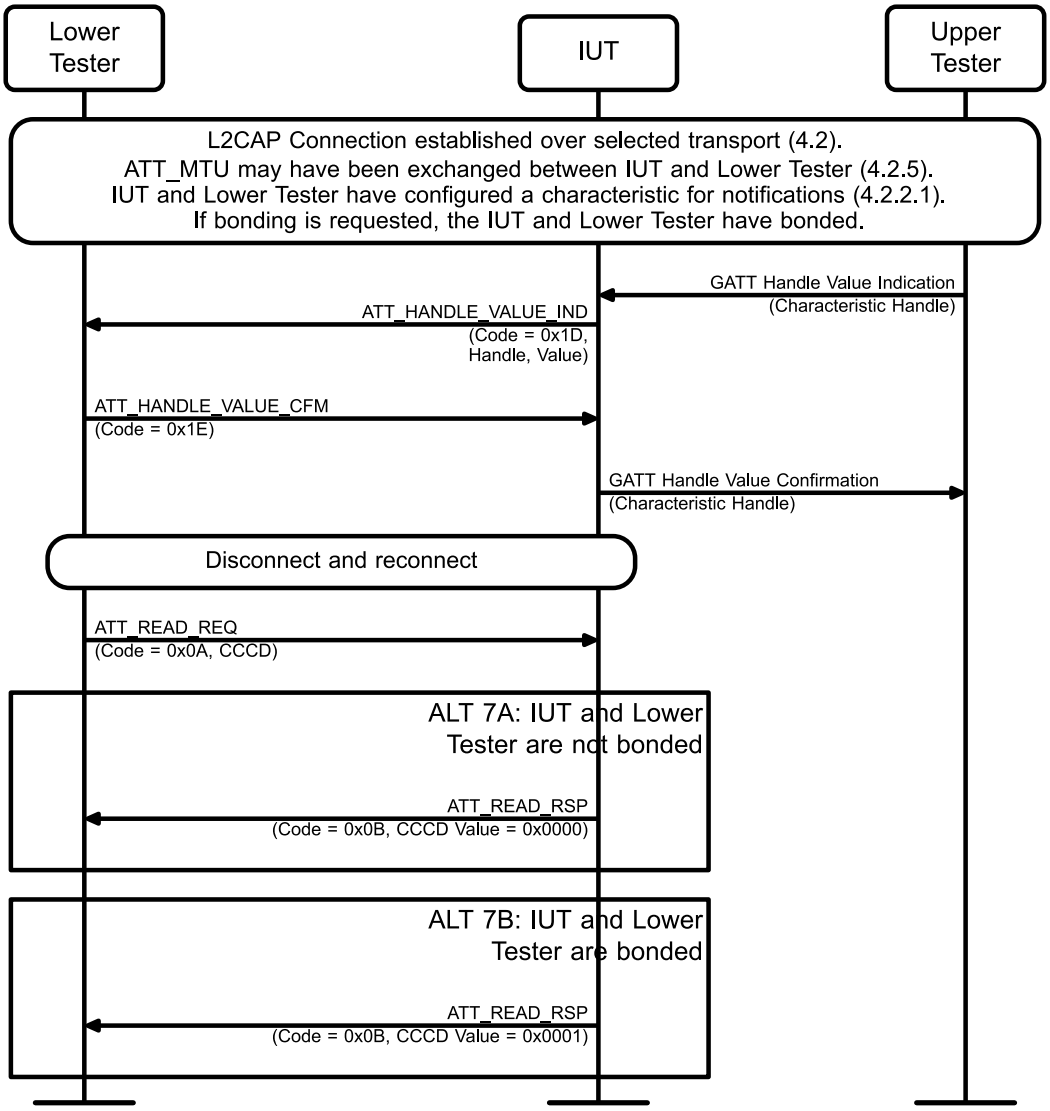


Figure 4.74: Characteristic Value Indication - by Server MSC

1. The Upper Tester orders the IUT to send an indication to the Lower Tester with a handle value set to a specific characteristic.
2. The IUT sends an ATT_HANDLE_VALUE_IND PDU (Code = 0x1D) to the Lower Tester with handle set to the handle specified in Step 1.
3. The Lower Tester sends an ATT_HANDLE_VALUE_CFM PDU (Code = 0x1E) to the IUT.
4. The IUT sends the GATT Handle Value Confirmation to the Upper Tester.
5. The Lower Tester terminates the connection with the IUT, then a new connection is established.
6. The Lower Tester sends an ATT_READ_REQ PDU to the IUT to read the CCCD of the characteristic from Step 2.
7. Perform either alternative 7A or 7B depending on whether the IUT supports bonding as indicated in Table 4.37:
   Alternative 7A (The IUT and the Lower Tester are not bonded):
   - 7A.1 The IUT sends an ATT_READ_RSP PDU to the Lower Tester with the characteristic's CCCD set to 0x0000.

Alternative 7B (The IUT and the Lower Tester are bonded):

7B.1 The IUT sends an ATT_READ_RSP PDU to the Lower Tester with the characteristic's CCCD set to 0x0002.

- Expected Outcome

  Pass verdict

  The IUT sends a correctly formatted ATT_HANDLE_VALUE_IND PDU (0x1D) to the Lower Tester.

  The Characteristic Handle is set to a valid handle.

  The Characteristic Value is set to the value of characteristic identified by the characteristic handle.

  The IUT receives ATT_HANDLE_VALUE_CFM PDU (0x1E) from the Lower Tester. The IUT sends GATT Handle Value Confirmation to the Upper Tester.

  The command size does not exceed any negotiated ATT_MTU.

  The IUT is successfully configured for indication using the procedure specified in Section 4.2.2.2.

  If the IUT and the Lower Tester are not bonded, then the IUT sends an ATT_READ_RSP PDU with the characteristic's CCCD set to 0x0000 when read by the Lower Tester after disconnection and reconnection.

  If the IUT and the Lower Tester are bonded, then the IUT sends an ATT_READ_RSP PDU with the characteristic's CCCD set to 0x0002 when read by the Lower Tester after disconnection and reconnection.

GATT/CL/GAI/BV-01-C [Confirm Characteristic Value Indication – by Client]

- Test Purpose

  Verify that a Generic Attribute Profile client can respond with a Confirmation to a Characteristic Value Indication.

- Reference

  [1] 4.11.1

  [5] 3.4.7.3

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.

- Test Procedure

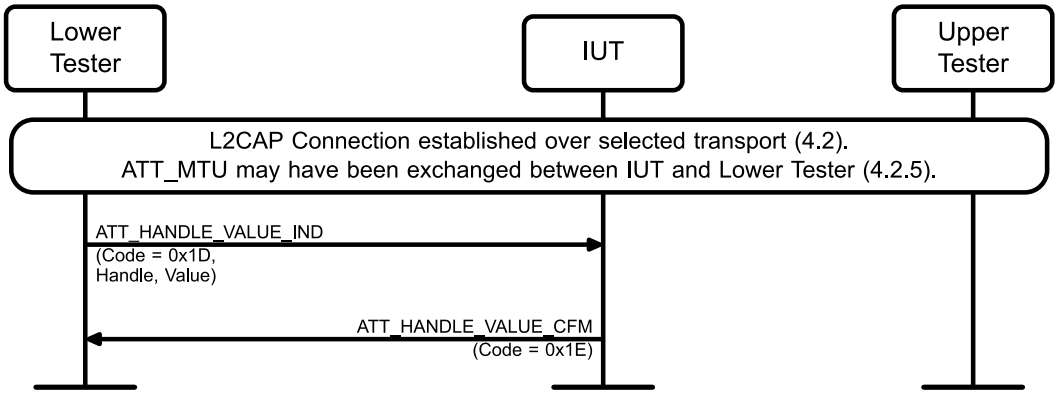


Figure 4.75: GATT/CL/GAI/BV-01-C [Confirm Characteristic Value Indication – by Client] MSC

1. The Lower Tester sends an ATT_HANDLE_VALUE_IND PDU to the IUT, with the Handle and Value.
2. The IUT sends an ATT_HANDLE_VALUE_CFM PDU to the Lower Tester.

- Expected Outcome

  Pass verdict

  The IUT sends an ATT_HANDLE_VALUE_CFM PDU (0x1E) to the Lower Tester.

  The IUT is successfully configured for indication using the procedure specified in Section 4.2.2.4.

GATT/CL/GAN/BV-02-C [Handle Value Multiple Notification – to Client]

- Test Purpose

  Verify that a Generic Attribute Profile client can receive a Handle Value Multiple Notification, based on the value of the *Client Supported Features* characteristic, and report that to the Upper Tester.

- Reference

  [11] 4.10.1, 4.14

  [12] 3.3.3, 3.4.7.4

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.4 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A preamble procedure defined in Section 4.2.2.1 is used to configure the characteristic for Notification.
  - There is no bond between the IUT and the Lower Tester.
  - Client Supported Feature in the Lower Tester has bit 2 set to 0.

- Test Procedure

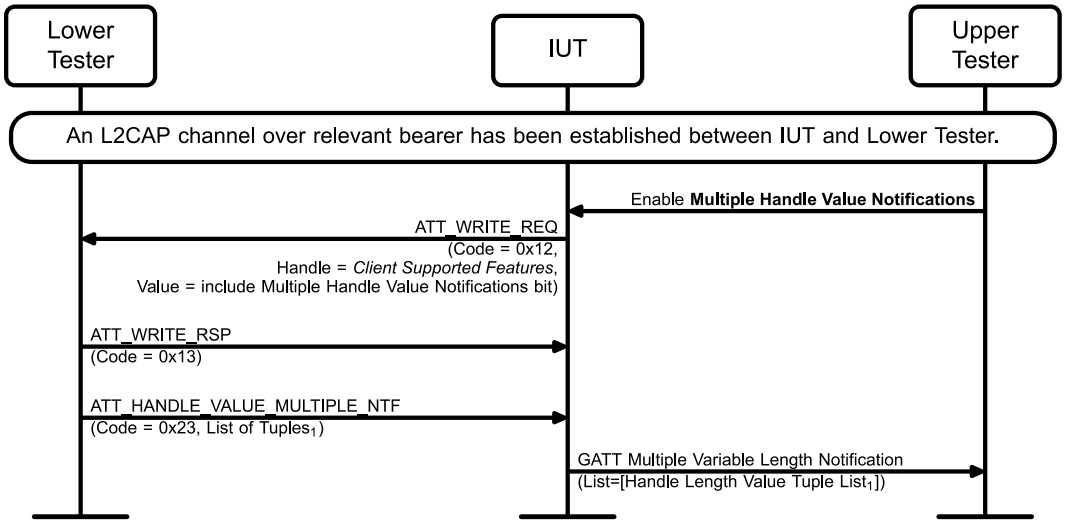


Figure 4.76: GATT/CL/GAN/BV-02-C [Handle Value Multiple Notification – to Client] MSC

1. The Upper Tester orders the IUT to enable the Multiple Handle Value Notifications feature.
2. The IUT sends an ATT_WRITE_REQ PDU, with the handle of the Client Supported Features characteristic, setting the Multiple Handle Value Notifications bit to 1 and all RFU bits to 0.
3. The Lower Tester sends an ATT_MULTIPLE_HANDLE_VALUE_NTF PDU (Code = 0x23) with a list of Handle Length Value Tuples for each of the attributes being notified.
4. The IUT sends a notification to the Upper Tester, e.g., GATT Multiple Variable Length Notification, containing the data from Step 1.

- Expected Outcome

  Pass verdict

  The IUT executes a GATT Characteristic Value Write procedure on the Client Supported Features characteristic, setting the Multiple Handle Value Notifications bit to 1, and setting all RFU bits to 0.

  After setting the Multiple Handle Value Notifications bit, when the IUT receives an ATT_MULTIPLE_HANDLE_VALUE_NTF PDU from the Lower Tester, it generates a message to the Upper Tester containing the characteristic handles, lengths, and attribute values included in that Handle Value Multiple Notification, before the Attribute Protocol Transaction timeout expires.

GATT/SR/GAN/BV-02-C [Handle Value Multiple Notification – by Server]

- Test Purpose

  Verify that a Generic Attribute Profile server can send a Handle Value Multiple Notification, based on the value of the *Client Supported Features* characteristic, and can maintain a separate instance for each Client.

- Reference

  [11] 4.10.1, 4.14

  [12] 3.4.7.4

- Initial Condition
  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.4 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A preamble procedure defined in Section 4.2.2.1 is used to configure the characteristic for Notification.
  - Lower Tester 1 has discovered the Client Supported Features characteristic and has saved the handle of the characteristic value.
  - There is no bond between the IUT and any of the Lower Testers.
- Test Procedure

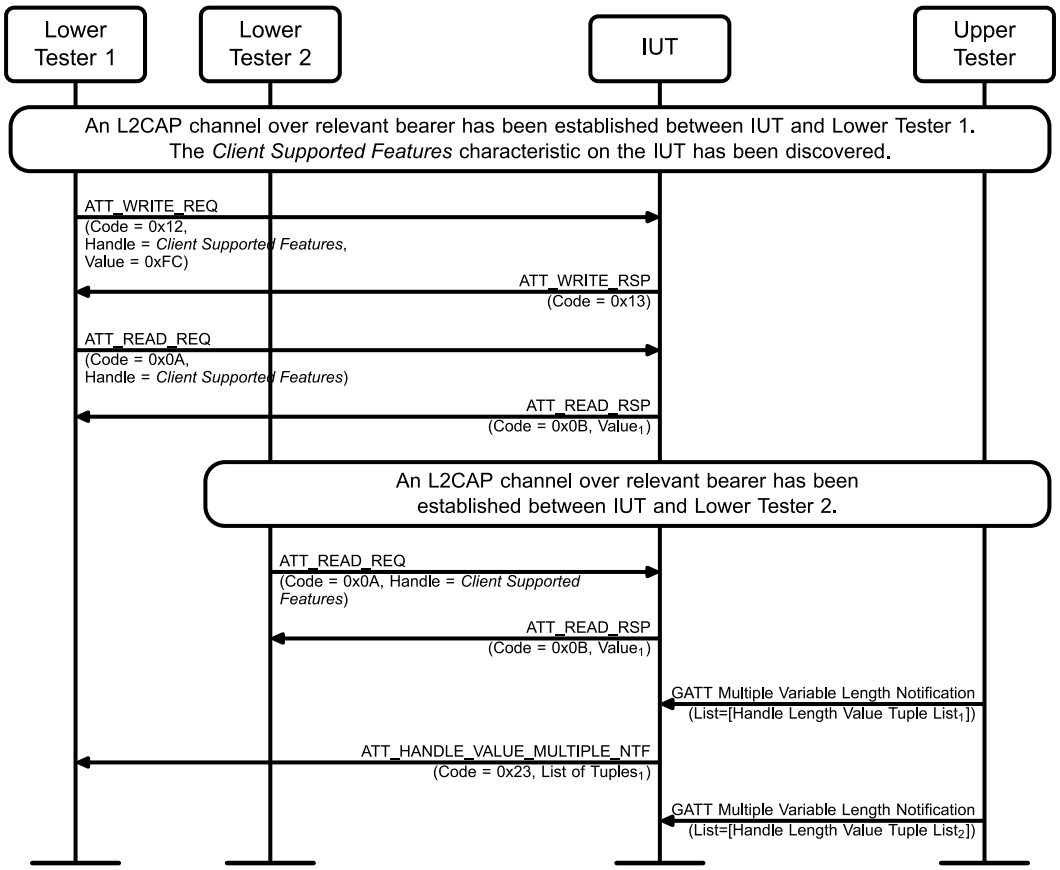


Figure 4.77: GATT/SR/GAN/BV-02-C [Handle Value Multiple Notification – by Server] MSC

1. Lower Tester 1 sends an ATT_WRITE_REQ PDU to the IUT, with the handle of the Client Supported Features characteristic, setting the Multiple Handle Value Notifications bit to 1, setting all RFU bits to 1, and setting all other bits to 0.
2. The IUT sends an ATT_WRITE_RSP PDU to Lower Tester 1, with the handle and value from Step 1.
3. Lower Tester 1 sends an ATT_READ_REQ PDU to the IUT, with the handle of the Client Supported Features characteristic.
4. The IUT sends an ATT_READ_RSP PDU to the Lower Tester, with the Multiple Handle Value Notifications bit set to 1 and all other bits set to 0.

5. Lower Tester 2 establishes a connection with the IUT.
6. Lower Tester 2 sends an ATT_WRITE_REQ PDU to the IUT, with the handle of the Client Supported Features characteristic, setting the Multiple Handle Value Notifications bit to 0.
7. The IUT sends an ATT_WRITE_RSP PDU to Lower Tester 2, with the handle and value from Step 5.
8. The Upper Tester sends a notification to the IUT, e.g., GATT Multiple Variable Length Notification, containing multiple characteristic handles, lengths, and values, for client 1 (Lower Tester 1).
9. The IUT sends an ATT_MULTIPLE_HANDLE_VALUE_NTF PDU (Code = 0x23) to the Lower Tester, with the list of Handle Length Value Tuples specifying the characteristics in Step 1.
10. The Upper Tester sends a notification to the IUT, e.g., GATT Multiple Variable Length Notification, containing multiple characteristic handles, lengths, and values, for client 2 (Lower Tester 2).
11. The IUT does not send anything to Lower Tester 2.

- Expected Outcome

  Pass verdict

  The IUT is successfully configured for notification using the procedure specified in Section 4.2.2.1.

  The IUT updates the value of the Client Supported Features characteristic as requested by the Client, ignoring the values of the RFU bits.

  The IUT sends a correctly formatted ATT_MULTIPLE_HANDLE_VALUE_NTF PDU to Lower Tester 1, when requested by the Upper Tester.

  The Handle Length Value Tuple List is set to the concatenation of the handle-length-value tuples for each of the attributes contained in the IUT and being notified.

  The IUT doesn’t send as ATT_MULTIPLE_HANDLE_VALUE_NTF PDU to Lower Tester 2, when requested by the Upper Tester.

GATT/CL/GAI/BI-01-C [Multiple Characteristic Value Indication Requests, Client]

- Test Purpose

  Verify that a Generic Attribute Profile client can properly handle receiving a second indication from the Lower Tester before sending the confirmation for the first indication.

- Reference

  [1] 4.11.1

  [5] 3.4.7.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A preamble procedure defined in Section 4.2.2.4 is used to configure the characteristic for Indication.

- Test Procedure

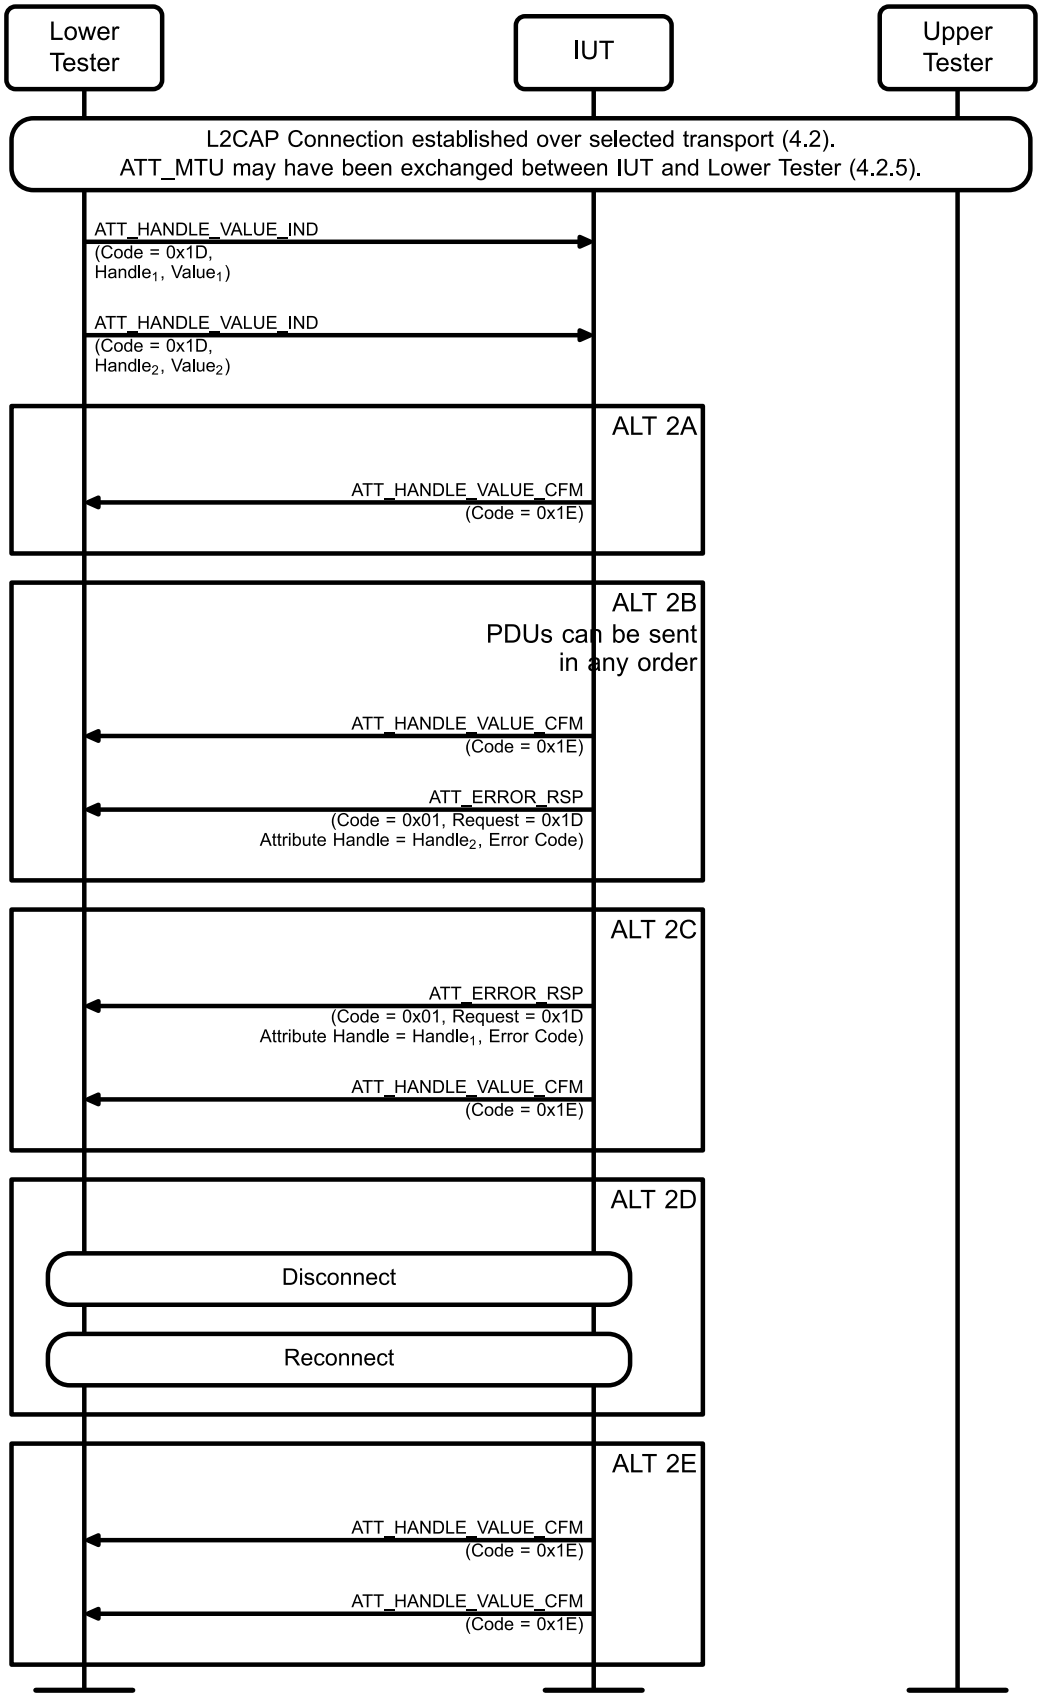


Figure 4.78: GATT/CL/GAI/BI-01-C [Multiple Characteristic Value Indication Requests, Client] MSC

1. The Lower Tester sends two indications to the IUT without waiting for a confirmation.
2. Perform an alternative:
   Alternative 2A:
   - 2A.1 The IUT sends an ATT_HANDLE_VALUE_CFM PDU to the Lower Tester for one of the Indications and ignores the other.

   Alternative 2B:
   - 2B.1 The IUT sends an ATT_HANDLE_VALUE_CFM PDU to the Lower Tester.
   - 2B.2 The IUT sends an ATT_ERROR_RSP PDU to the Lower Tester with Attribute Handle In Error set to Handle 2.

   Alternative 2C:
   - 2C.1 The IUT sends an ATT_HANDLE_VALUE_CFM PDU to the Lower Tester.
   - 2C.2 The IUT sends an ATT_ERROR_RSP PDU to the Lower Tester with Attribute Handle In Error set to Handle 1.

   Alternative 2D:
   - 2D.1 The IUT disconnects the L2CAP connection.
   - 2D.2 The Lower Tester reconnects to the IUT to confirm that the IUT has not crashed.

   Alternative 2E:
   - 2E.1 The IUT sends two ATT_HANDLE_VALUE_CFM PDUs to the Lower Tester.

- Expected Outcome

  Pass verdict

  ALT 2A: The IUT sends an ATT_HANDLE_VALUE_CFM PDU for one of the indications and ignores the other.

  ALT 2B: The IUT sends an ATT_HANDLE_VALUE_CFM PDU and an ATT_ERROR_RSP PDU for the second request with an Error Code and Attribute Handle set to handle 2. The two PDUs can be sent in any order.

  ALT 2C: The IUT sends an ATT_ERROR_RSP PDU for the first request with an Error Code and the Attribute Handle set to handle 1 and then sends an ATT_HANDLE_VALUE_CFM PDU.

  ALT 2D: The IUT disconnects the L2CAP connection with the Lower Tester. The Lower Tester then reconnects the L2CAP connection with the Lower Tester to confirm that the IUT has not crashed.

  ALT 2E: The IUT sends two ATT_HANDLE_VALUE_CFM PDUs to the Lower Tester for both indications.

4.9 Generic Attribute Profile Services

Verify the correct implementation of the Generic Attribute Profile Services. All of these test cases apply to Generic Attribute Profile servers.

GATT/CL/GAS/BV-01-C [Service Changed Characteristic – to Client]

- Test Purpose

  Verify the IUT client behavior when a «Service Changed» Indication is received from a server.

- Reference

  [1] 2.5.2, 7.1

  [5] 3.4.5.3, 3.4.7.2, 3.4.7.3

- Initial Condition
  - The IUT has performed service discovery during a previous connection and has cached handles.
  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange an ATT MTU between the IUT and the Lower Tester.
  - A preamble procedure defined in Section 4.2.2.4 is used to configure the Lower Tester's «Service Changed» characteristic for Indication.
- Test Procedure

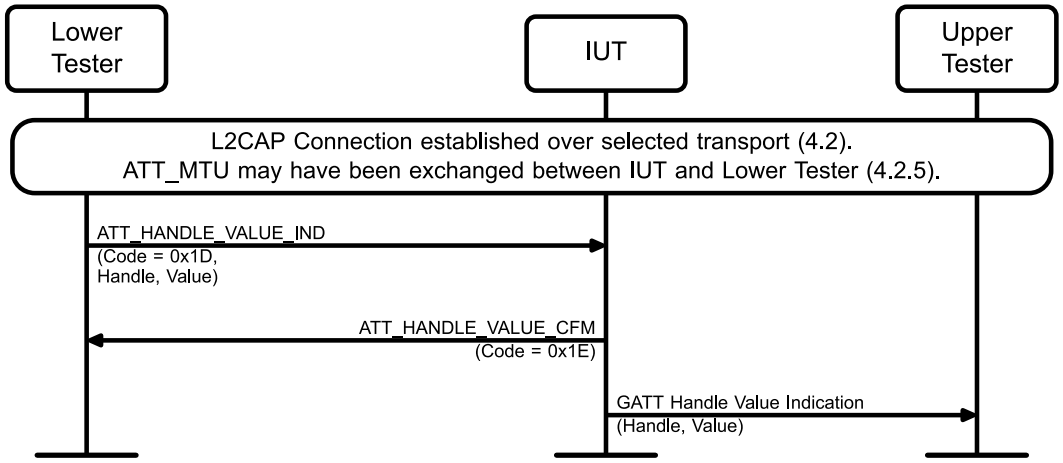


Figure 4.79: GATT/CL/GAS/BV-01-C [Service Changed Characteristic – to Client] MSC

1. The Lower Tester sends an ATT_HANDLE_VALUE_IND PDU to the IUT containing the «Service Changed» characteristic. The Characteristic Value contains a handle range that includes the handles cached by the IUT.
2. The IUT sends an ATT_HANDLE_VALUE_CFM to the Lower Tester.
3. The IUT sends a GATT Handle Value Indication event to the Upper Tester, with the Handle and Value received in Step 1.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends an ATT_HANDLE_VALUE_CFM PDU (0x1E) to the Lower Tester.

  In Step 3, the IUT sends a GATT Indication event to the Upper Tester, with the Handle and Value received in Step 1.

GATT/CL/GAS/BV-02-C [Reading the Database Hash Characteristic]

- Test Purpose

  Verify that the IUT acting as GATT Client can read the value of the *Database Hash* characteristic.

- Reference

  [10] 2.5.2, 7.3

- Initial Condition
  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel between the IUT and the Lower Tester.
  - ATT_MTU may have been exchanged between the IUT and the Lower Tester using the GATT Exchange MTU sub-procedure.
- Test Procedure

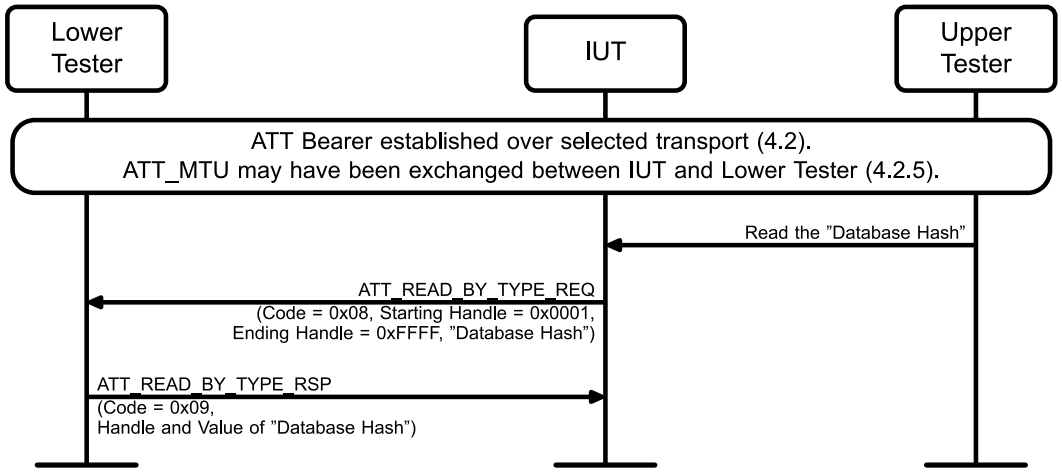


Figure 4.80: GATT/CL/GAS/BV-02-C [Reading the Database Hash Characteristic] MSC

1. The Upper Tester sends a command to the IUT to read the «Database Hash» characteristic.
2. The IUT sends a correctly formatted ATT_READ_BY_TYPE_REQ PDU to the Lower Tester, with the Starting Handle = 0x0001, Ending Handle = 0xFFFF, and the Attribute Type set to the «Database Hash» characteristic UUID.
3. The Lower Tester sends the IUT an ATT_READ_BY_TYPE_RSP PDU containing the Handle and the Value of the «Database Hash» characteristic.

- Expected Outcome

  Pass verdict

  The IUT executes the GATT Read Using Characteristic UUID sub-procedure, with the characteristic UUID set to «Database Hash», and the handle range 0x0001-0xFFFF.

GATT/CL/GAS/BV-03-C [Enabling the Robust Caching]

- Test Purpose

  Verify that the IUT acting as GATT Client can enable the Robust Caching feature on the Server.

- Reference

  [10] 2.5.2.1, 7.2

- Initial Condition
  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel between the IUT and the Lower Tester.
  - ATT_MTU may have been exchanged between the IUT and the Lower Tester using the GATT Exchange MTU sub-procedure.

- The IUT has discovered the Client Supported Features characteristic and has saved the handle of the characteristic value.
- There is no bond between the IUT and the Lower Tester.

- Test Procedure

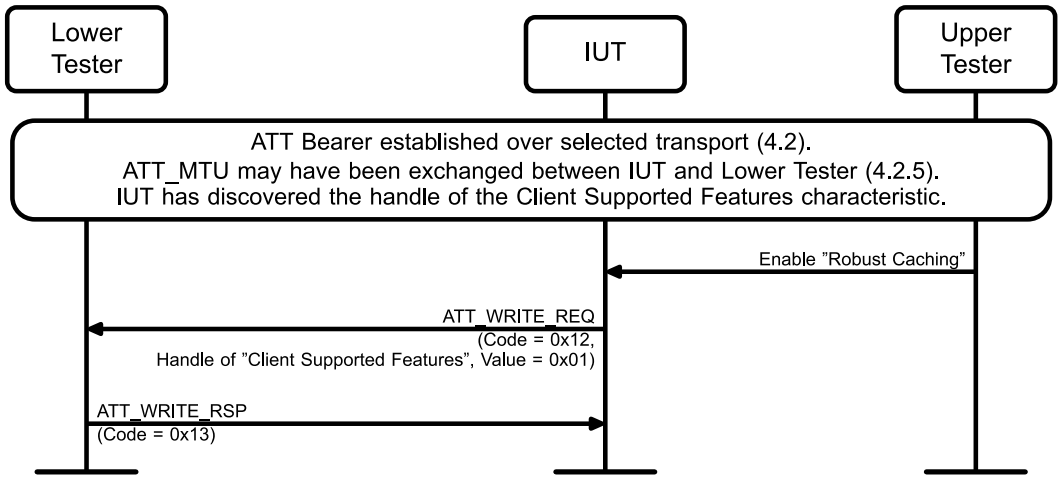


Figure 4.81: GATT/CL/GAS/BV-03-C [Enabling the Robust Caching] MSC

1. The Upper Tester sends a command to the IUT to enable the Robust Caching feature.
2. The IUT sends a correctly formatted ATT_WRITE_REQ PDU to the Lower Tester, with the Handle of the «Client Supported Features» characteristic, and Value = 0x01.
3. The Lower Tester sends an ATT_WRITE_RSP PDU to the IUT.

- Expected Outcome

  Pass verdict

  The IUT executes a GATT Characteristic Value Write procedure on the *Client Supported Features* characteristic, setting the Robust Caching bit to 1, and setting all RFU bits to 0.

GATT/SR/GAS/BV-01-C [Service Changed Characteristic and Indication – from Server]

- Test Purpose

  Verify that a GATT Server as IUT that supports the «Service Changed» characteristic generates an indication only if the Client enables the Indication in the Client Characteristic Configuration descriptor.

- Reference

  [1] 2.5.2, 7.1

  [5] 3.4.5.2, 3.4.7.2, 3.4.7.3

- Initial Condition
  - The Lower Tester has bonded with the IUT during a previous connection and both the Lower Tester and IUT have valid stored bonding information.
  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.

- The Lower Tester has the necessary security permissions from the IUT to write the Client Characteristic Configuration descriptor.
- The Client Characteristic Configuration descriptor in the IUT has the Indication bit set to 0 (zero) (the Characteristic Value is NOT indicated).

- Test Procedure

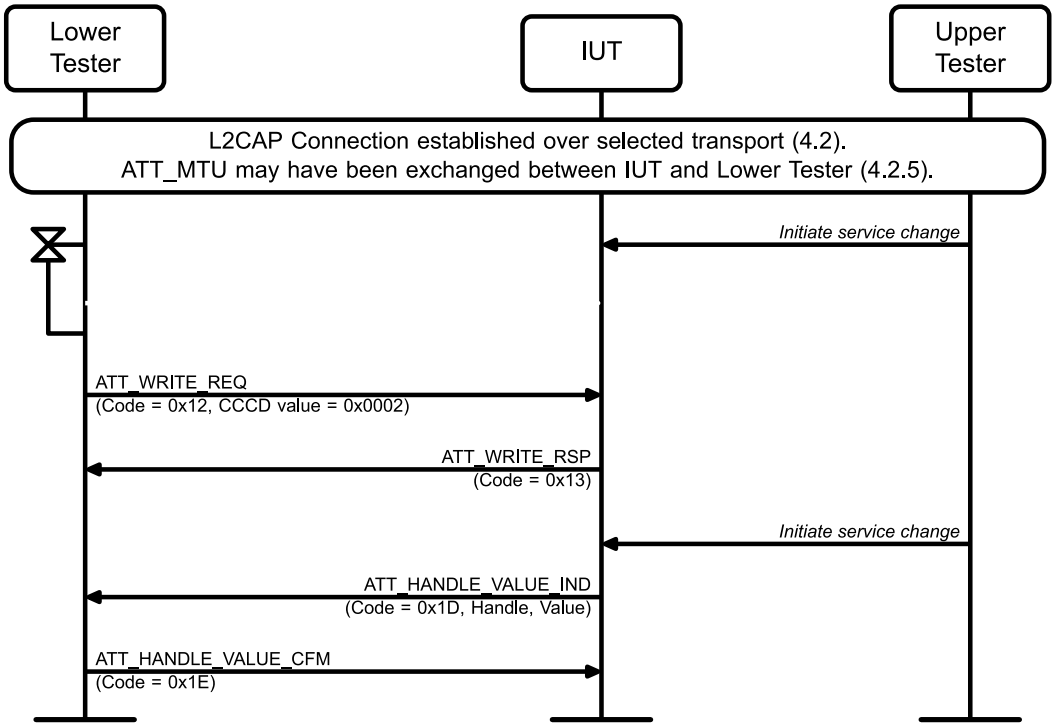


Figure 4.82: GATT/SR/GAS/BV-01-C [Service Changed Characteristic and Indication – from Server] MSC

1. The Upper Tester sends a command to the IUT to initiate a service change. This may be performed before or after the connection is established.
2. Wait for at least two connection intervals. The IUT does not send any message to the Lower Tester during this time.
3. The Lower Tester sends an ATT_WRITE_REQ PDU with Handle = 0x2902 («Client Characteristic Configuration Descriptor») and Value = 0x0002 to the IUT, to enable Indication.
4. The Upper Tester sends a command to the IUT to initiate a service change.
5. The IUT sends an ATT_HANDLE_VALUE_IND PDU to the Lower Tester containing the «Service Changed» characteristic.
6. The Lower Tester sends an ATT_HANDLE_VALUE_CFM PDU to the IUT.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT does not send an ATT_HANDLE_VALUE_IND PDU to the Lower Tester.

  In Step 5, the IUT sends a properly formatted ATT_HANDLE_VALUE_IND PDU containing the «Service Changed» characteristic.

  The IUT responds within the applicable timeout (Section 3.3.3 of ATT [5]).

GATT/SR/GAS/BV-02-C [Computing and Returning the Database Hash Characteristic]

- Test Purpose

  Verify that the IUT acting as GATT Server can return and properly update the value of the *Database Hash* characteristic.

- Reference

  [10] 2.5.2, 7.3

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel between the IUT and the Lower Tester.
  - ATT_MTU may have been exchanged between the IUT and the Lower Tester using the GATT Exchange MTU sub-procedure.

- Test Procedure

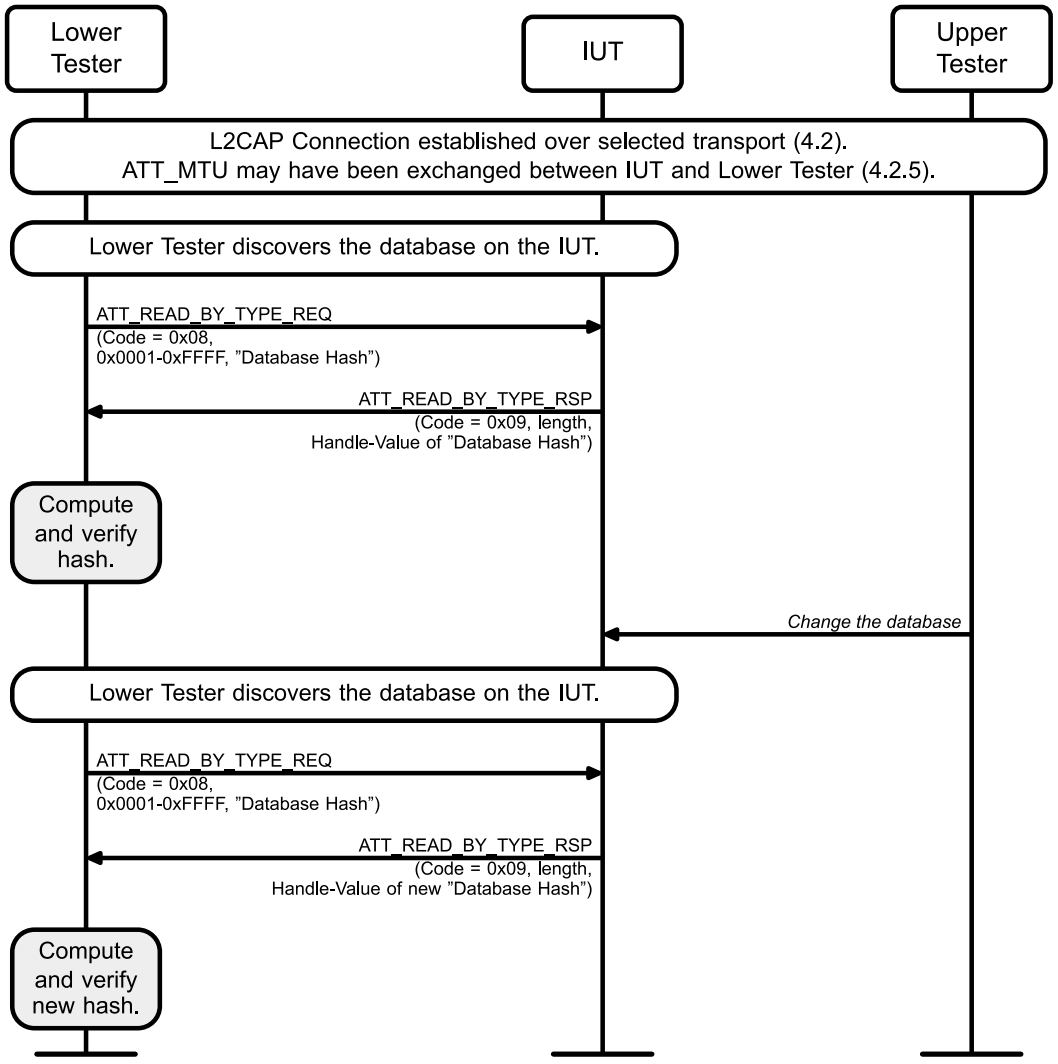


Figure 4.83: GATT/SR/GAS/BV-02-C [Computing and Returning the Database Hash Characteristic] MSC

1. The Lower Tester discovers the complete GATT database from the IUT by executing Service and Characteristic Discovery procedures.
2. The Lower Tester sends an ATT_READ_BY_TYPE_REQ PDU to the IUT, with the Starting Handle = 0x0001, Ending Handle = 0xFFFF, and the Attribute Type set to the «Database Hash» characteristic UUID.
3. The IUT sends a correctly formatted ATT_READ_BY_TYPE_RSP PDU to the Lower Tester containing the Handle and the Value of the «Database Hash» characteristic.
4. The Lower Tester computes the correct value of the database hash and verifies that it matches the value of the «Database Hash» characteristic obtained in Step 1. If the values do not match, the test ends with a Fail verdict.
5. The Upper Tester orders the IUT to change its GATT database by adding or removing services and/or characteristics.
6. Repeat Steps 1–4.

- Expected Outcome

  Pass verdict

  The IUT returns the correct value of the *Database Hash* characteristic in both iterations of Step 4.

GATT/SR/GAS/BV-03-C [Maintaining a Client Supported Features Characteristic Instance for each Client]

- Test Purpose

  Verify that the IUT acting as GATT Server can update the value of the *Client Supported Features* characteristic and, if applicable, can maintain a separate instance for each Client.

- Reference

  [10] 2.5.2, 7.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel between the IUT and Lower Tester 1.
  - ATT_MTU may have been exchanged between IUT and Lower Tester 1 using the GATT Exchange MTU sub-procedure.
  - Lower Tester 1 has discovered the Client Supported Features characteristic and has saved the handle of the characteristic value.
  - There is no bond between the IUT and any of the Lower Testers.

- Test Procedure

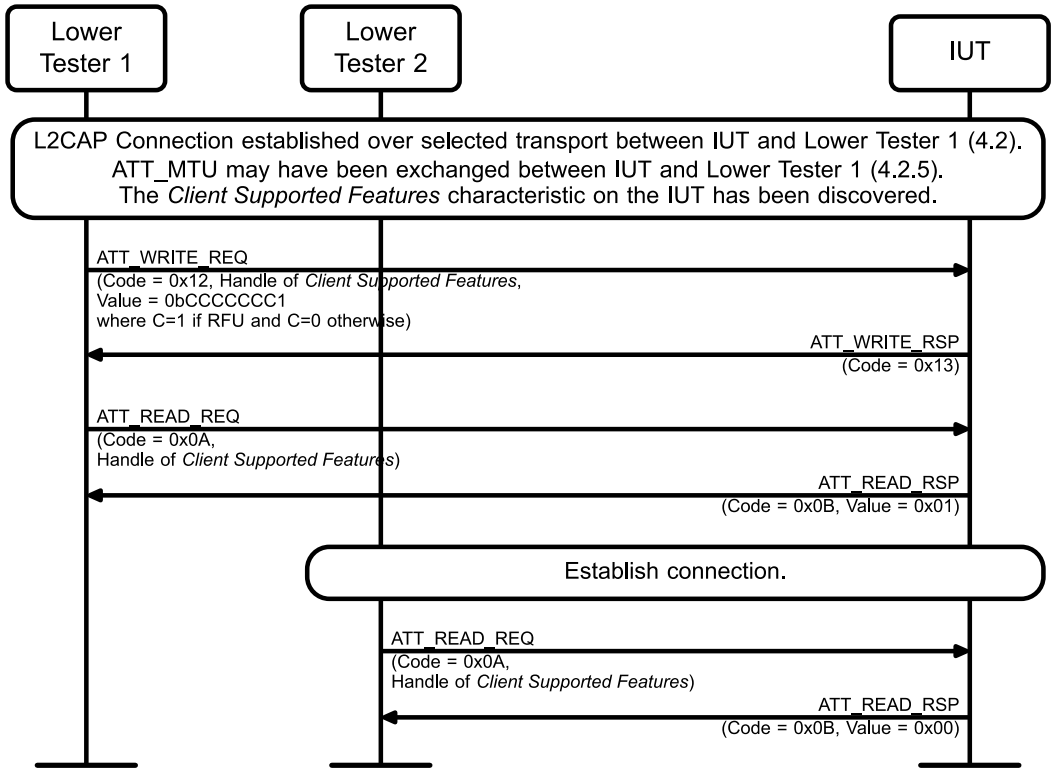


Figure 4.84: GATT/SR/GAS/BV-03-C [Maintaining a Client Supported Features Characteristic Instance for each Client] MSC

1. Lower Tester 1 executes a GATT Characteristic Value Write procedure on the Client Supported Features characteristic, sending an ATT_WRITE_REQ PDU with the Robust Caching bit to 1, setting all RFU bits to 1, and setting all other bits to 0.
2. The IUT sends an ATT_WRITE_RSP PDU to Lower Tester 1.
3. Lower Tester 1 executes a GATT Characteristic Value Read procedure on the Client Supported Features characteristic, sending an ATT_READ_REQ PDU to the IUT, with the handle of the Client Supported Features characteristic.
4. The IUT sends an ATT_READ_RSP PDU to Lower Tester 1, with Value = 0x01 (Robust Caching bit to be set to 1 and all other bits to 0).
5. If the IUT does not support multiple simultaneous LE connections, end the test; otherwise, continue with Step 6.
6. Lower Tester 2 establishes a connection to the IUT.
7. Lower Tester 2 executes a GATT Characteristic Value Read procedure on the Client Supported Features characteristic, sending an ATT_READ_REQ PDU to the IUT, with the handle of the Client Supported Features characteristic.
8. The IUT sends an ATT_READ_RSP PDU to Lower Tester 1, with Value = 0x00 (Robust Caching bit to be set to 0 and all other bits to 0).

- Expected Outcome

  Pass verdict

  The IUT updates the value of the *Client Supported Features* characteristic as requested by the Client, ignoring the values of the RFU bits.

If the IUT supports multiple simultaneous LE connections, it maintains separate characteristic instances for each Client.

In Step 4, the IUT sends a correctly formatted ATT_READ_RSP PDU, with Value = 0x01 (Robust Caching bit to be set to 1 and all other bits to 0).

In Step 8, the IUT sends a correctly formatted ATT_READ_RSP PDU, with Value = 0x00 (Robust Caching bit to be set to 0 and all other bits to 0).

GATT/SR/GAS/BV-04-C [Maintaining Client Supported Features Characteristic Values for Bonded Devices]

- Test Purpose

  Verify that the IUT acting as GATT Server saves and restores the value of the *Client Supported Features* characteristic for bonded devices across connections.

- Reference

  [10] 2.5.2, 7.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel between the IUT and the Lower Tester.
  - ATT_MTU may have been exchanged between the IUT and the Lower Tester using the GATT Exchange MTU sub-procedure.
  - The IUT and the Lower Tester have paired and bonded.
  - The Lower Tester has discovered the Client Supported Features characteristic and has saved the handle of the characteristic value.

- Test Procedure

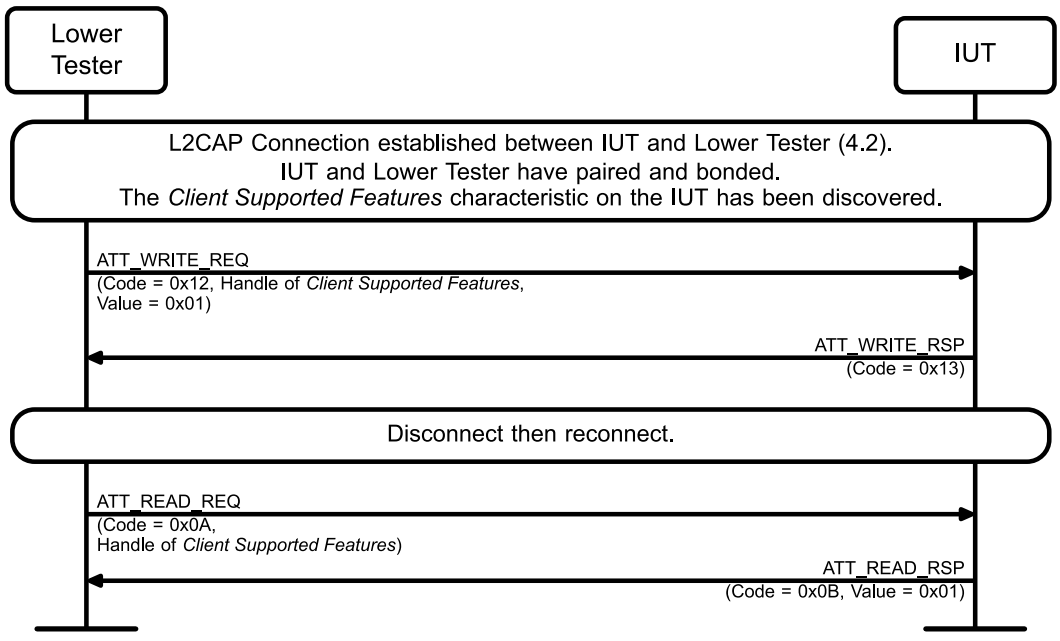


Figure 4.85: GATT/SR/GAS/BV-04-C [Maintaining Client Supported Features Characteristic Values for Bonded Devices] MSC

1. The Lower Tester executes a GATT Characteristic Value Write procedure on the Client Supported Features characteristic, sending an ATT_WRITE_REQ PDU with the Robust Caching bit set to 1.
2. The IUT sends an ATT_WRITE_RSP PDU to the Lower Tester.
3. The Lower Tester terminates the connection with the IUT, then a new connection is established.
4. The Lower Tester executes a GATT Characteristic Value Read procedure on the Client Supported Features characteristic, sending an ATT_READ_REQ PDU to the IUT, with the handle of the Client Supported Features characteristic.
5. The IUT sends an ATT_READ_RSP PDU to Lower Tester 1, with Value = 0x01 (Robust Caching bit to be set to 1 and all other bits to 0).

- Expected Outcome

  Pass verdict

  The IUT maintains the value of the *Client Supported Features* characteristic across connections; in Step 5, the IUT sends an ATT_READ_RSP PDU containing the value of the *Client Supported Features* with Robust Caching bit to be set to 1.

GATT/SR/GAS/BV-05-C [Handling Client Requests on Unsynchronized Database]

- Test Purpose

  Verify that the IUT acting as GATT Server handles Client requests on an unsynchronized database based on the Robust Caching feature being enabled or disabled.

- Reference

  [10] 2.5.2, 7.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel between the IUT and the Lower Tester.
  - ATT_MTU may have been exchanged between the IUT and the Lower Tester using the GATT Exchange MTU sub-procedure.
  - The GATT database on the IUT contains at least one characteristic that supports the GATT Characteristic Value Read sub-procedure and at least one characteristic that supports the GATT Write Without Response sub-procedure. Any change on the GATT database during the test procedure will not affect these characteristics.
  - The Lower Tester has discovered the characteristics on the IUT and has saved the handles of their values.
  - The Lower Tester does not enable indications on the «Service Changed» characteristic.
  - The Lower Tester has not enabled the Robust Caching feature.
  - There is no bond between the IUT and the Lower Tester.

- Test Procedure

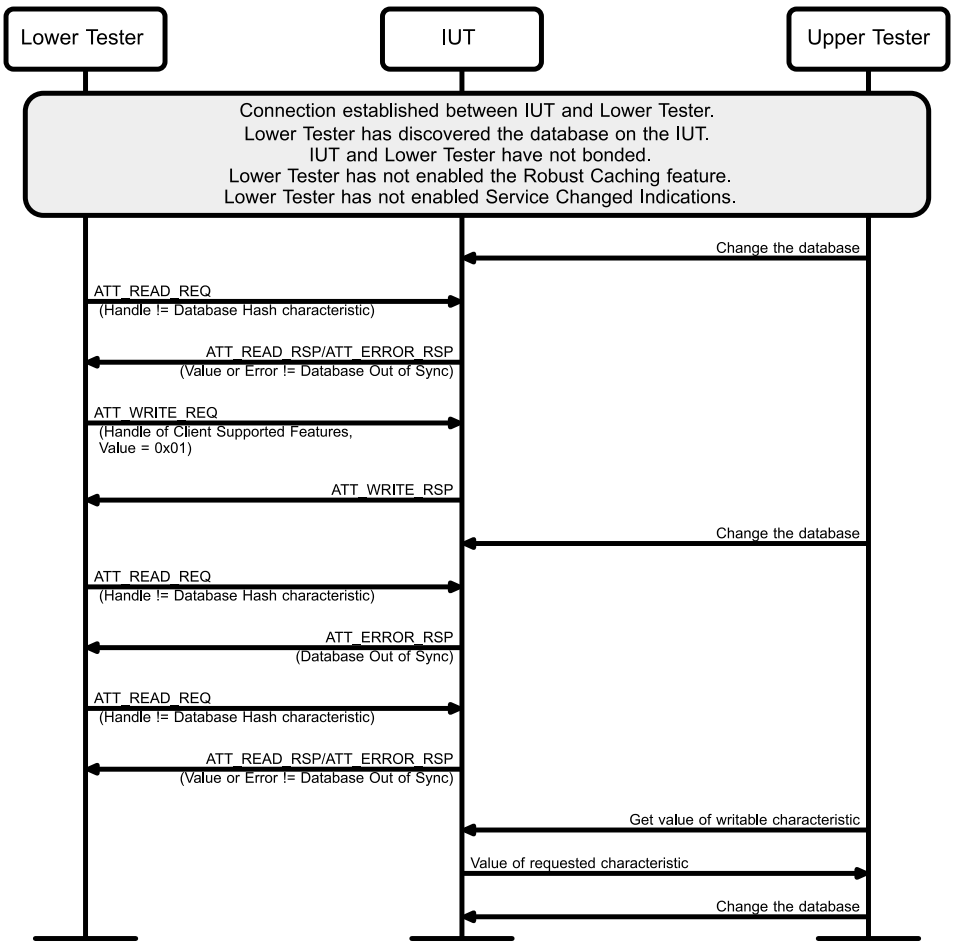


Figure 4.86: GATT/SR/GAS/BV-05-C [Handling Client Requests on Unsynchronized Database] MSC – Page 1 of 2

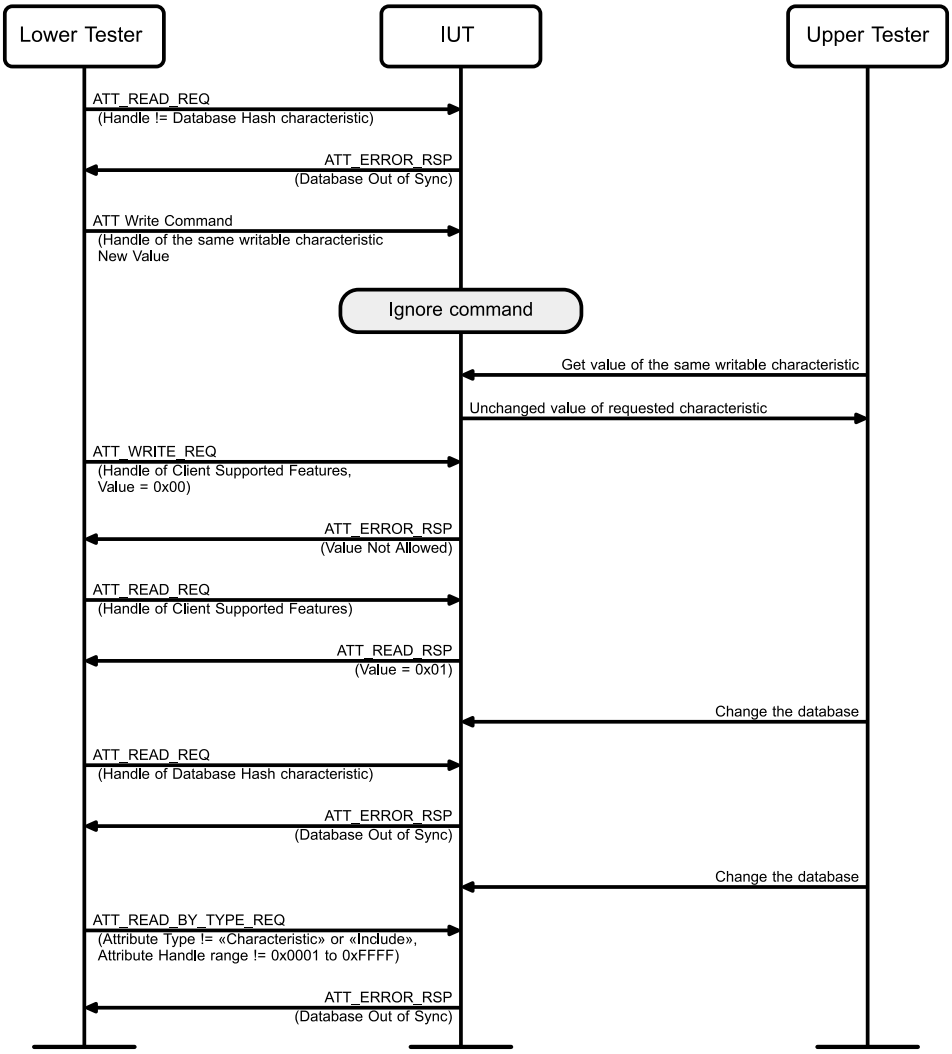


Figure 4.87: GATT/SR/GAS/BV-05-C [Handling Client Requests on Unsynchronized Database] MSC – Page 2 of 2

1. The Upper Tester orders the IUT to change its GATT database by adding or removing services and/or characteristics.
2. The Lower Tester executes the GATT Characteristic Value Read sub-procedure on a characteristic (other than the Database Hash characteristic) and expects the IUT to return either the characteristic value or a different error code. If the Database Out of Sync error is returned, the test ends with a Fail verdict.
3. The Lower Tester executes a GATT Characteristic Value Write procedure on the Client Supported Features characteristic, setting the Robust Caching bit to 1.
4. Repeat Step 1.
5. The Lower Tester executes the GATT Characteristic Value Read sub-procedure on a characteristic (other than the Database Hash characteristic) and expects the IUT to return the Database Out of Sync error.
6. The Lower Tester tries to read the same characteristic as in the previous step, and this time expects the IUT to return either the characteristic value or a different error code. If the Database Out of Sync error is returned, the test ends with a Fail verdict.
7. The Upper Tester reads the value of a characteristic on the IUT that supports the GATT Write Without Response sub-procedure.
8. Repeat Step 1, then repeat Step 5.

9. The Lower Tester executes a GATT Write Without Response sub-procedure on the characteristic whose value is known from Step 7, trying to change the characteristic to a new, valid value. The IUT is expected to ignore the command.
10. Repeat Step 7, expecting the IUT to return the same characteristic value. If the IUT has changed the value of the characteristic, then the test ends with a Fail verdict.
11. The Lower Tester executes a GATT Characteristic Value Write procedure on the Client Supported Features characteristic, setting the Robust Caching bit to 0, and expects the IUT to return the Value Not Allowed error.
12. The Lower Tester executes a GATT Characteristic Value Read procedure on the Client Supported Features characteristic, expecting the Robust Caching bit to be set to 1.
13. Repeat Step 1.
14. The Lower Tester executes the GATT Characteristic Value Read sub-procedure on the Database Hash characteristic and expects the IUT to return the Database Out of Sync error.
15. Repeat Step 1.
16. The Lower Tester executes the GATT Read Using Characteristic UUID sub-procedure request to the IUT with the Attribute Type not set to «Include» or «Characteristic» and an Attribute Handle range other than 0x0001 to 0xFFFF and expects the IUT to return the Database Out of Sync error.

- Expected Outcome

  Pass verdict

  In both executions of Step 5, the IUT returns the Database Out of Sync error.

  In Steps 2 and 6, the IUT does not return the Database Out of Sync error.

  In Step 9, the IUT ignores the ATT command from the Lower Tester.

  In Step 11, the IUT returns the Value Not Allowed error and does not change the value of the characteristic.

  In Steps 14 and 16, the IUT returns the Database Out of Sync error.

GATT/SR/GAS/BV-06-C [Handling Client Requests after a Hash Read or Service Changed Indication – Database Changed during Connection]

- Test Purpose

  Verify that the IUT acting as GATT Server does not return the Database Out of Sync error after a hash read when the Robust Caching feature is enabled. The database is changed during the same connection.

- Reference

  [10] 2.5.2, 7.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel between the IUT and the Lower Tester.
  - ATT_MTU may have been exchanged between the IUT and the Lower Tester using the GATT Exchange MTU sub-procedure.
  - The GATT database on the IUT contains at least one characteristic that supports the GATT Characteristic Value Read sub-procedure. Any change on the GATT database during the test procedure will not affect this characteristic.
  - The Lower Tester has discovered the characteristics on the IUT and has saved the handles of their values.
  - The Lower Tester does not enable indications on the «Service Changed» characteristic unless specifically directed to do so.
  - There is no bond between the IUT and the Lower Tester.

- Test Procedure

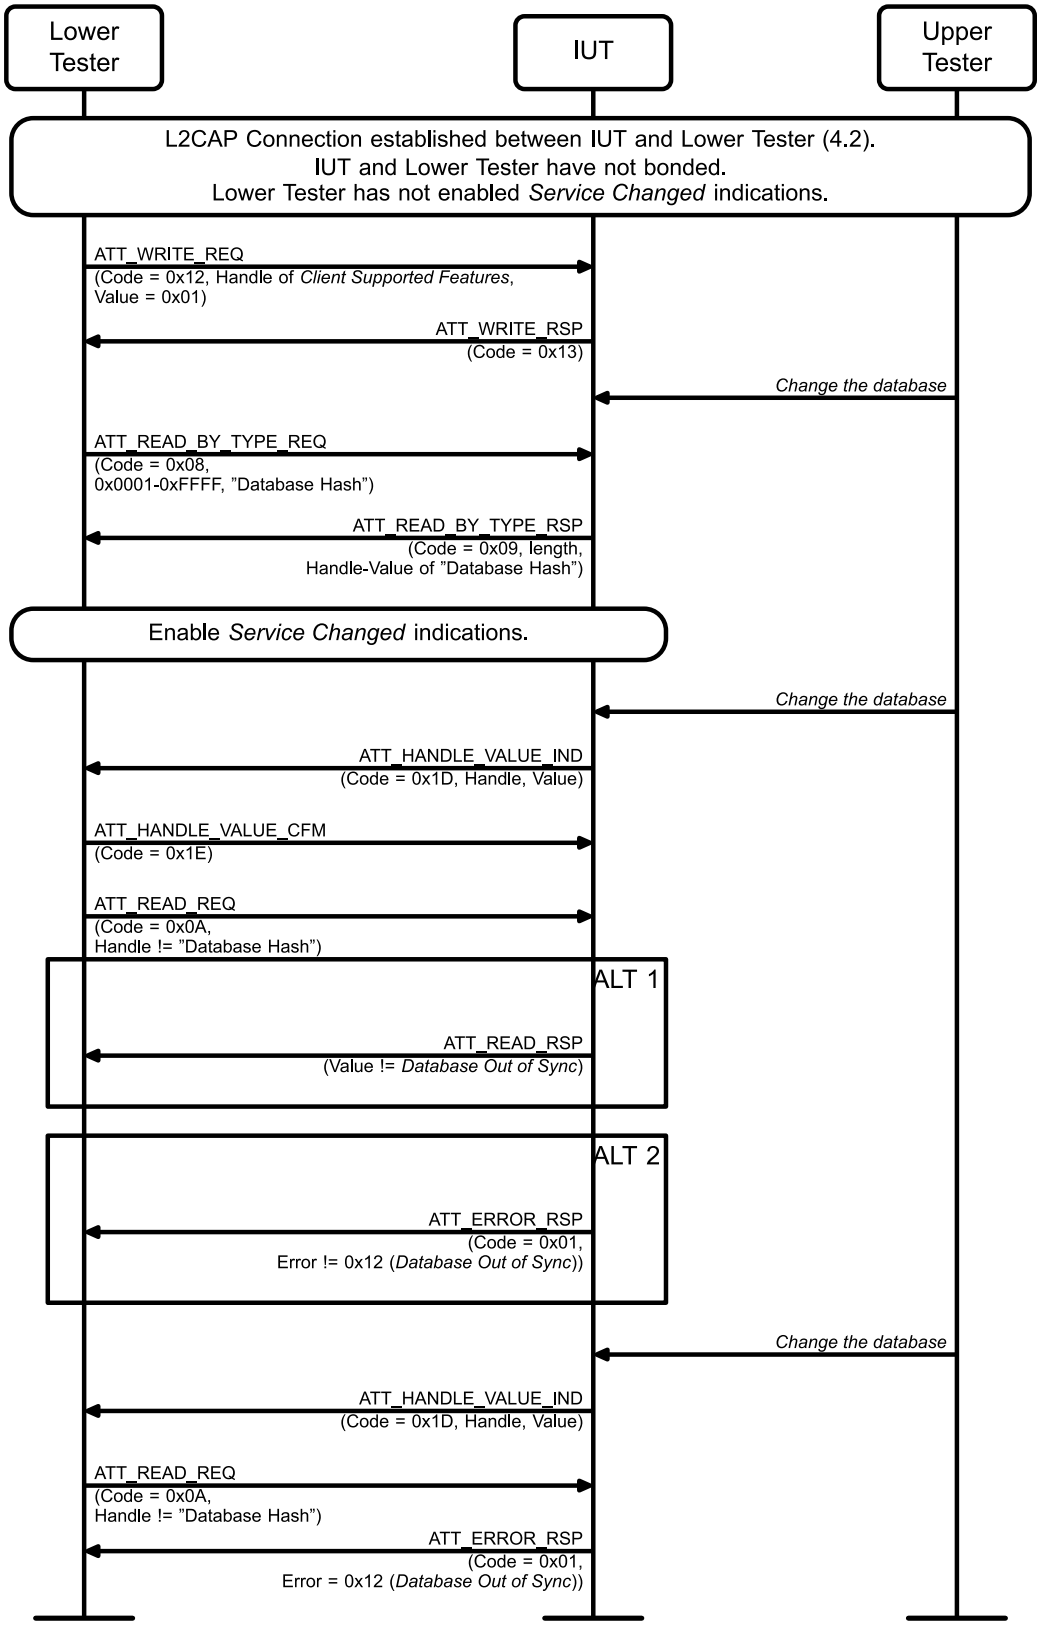


Figure 4.88: GATT/SR/GAS/BV-06-C [Handling Client Requests after a Hash Read or Service Changed Indication – Database Changed during Connection] MSC

1. The Lower Tester executes a GATT Characteristic Value Write procedure on the «Client Supported Features» characteristic, setting the Robust Caching bit to 1.
2. The Upper Tester orders the IUT to change its GATT database by adding or removing services and/or characteristics.
3. The Lower Tester executes the GATT Read Using Characteristic UUID sub-procedure on the Database Hash characteristic.
4. The Lower Tester executes the GATT Characteristic Value Read sub-procedure on another characteristic (different than the Database Hash characteristic) and expects the IUT to return either the characteristic value or a different error code. If the Database Out of Sync error is returned, the test ends with a Fail verdict.
5. The Lower Tester enables indications on the «Service Changed» characteristic.
6. Repeat Step 2 and wait for the IUT to send an indication on the «Service Changed» characteristic. If the indication is not received within 30 seconds, the test ends with a Fail verdict.
7. The Lower Tester confirms the indication, then repeat Step 4.
8. Repeat Step 6.
9. The Lower Tester does not confirm the indication but instead executes the GATT Characteristic Value Read sub-procedure on another characteristic (different than the Database Hash characteristic) and expects the IUT to return the Database Out of Sync error.

- Expected Outcome

  Pass verdict

  In both executions of Step 4, the IUT does not return the Database Out of Sync error.

  In Step 9, the IUT returns the Database Out of Sync error.

GATT/SR/GAS/BV-07-C [Handling Client Requests after a Hash Read or Service Changed Indication – Database Changed between Connections]

- Test Purpose

  Verify that the IUT acting as GATT Server does not return the Database Out of Sync error after a hash read when the Robust Caching feature is enabled. The database is changed between connections after a bond has been created.

- Reference

  [10] 2.5.2, 7.2

- Initial Condition

  - The GATT database on the IUT contains at least one characteristic that supports the GATT Characteristic Value Read sub-procedure. Any change on the GATT database during the test procedure will not affect this characteristic.
  - The IUT and the Lower Tester have bonded and the connection has been terminated.
  - The Lower Tester has discovered the characteristics on the IUT and has saved the handles of their values.
  - The Lower Tester has enabled the Robust Caching feature.
  - The Lower Tester has not enabled indications on the «Service Changed» characteristic.

- Test Procedure

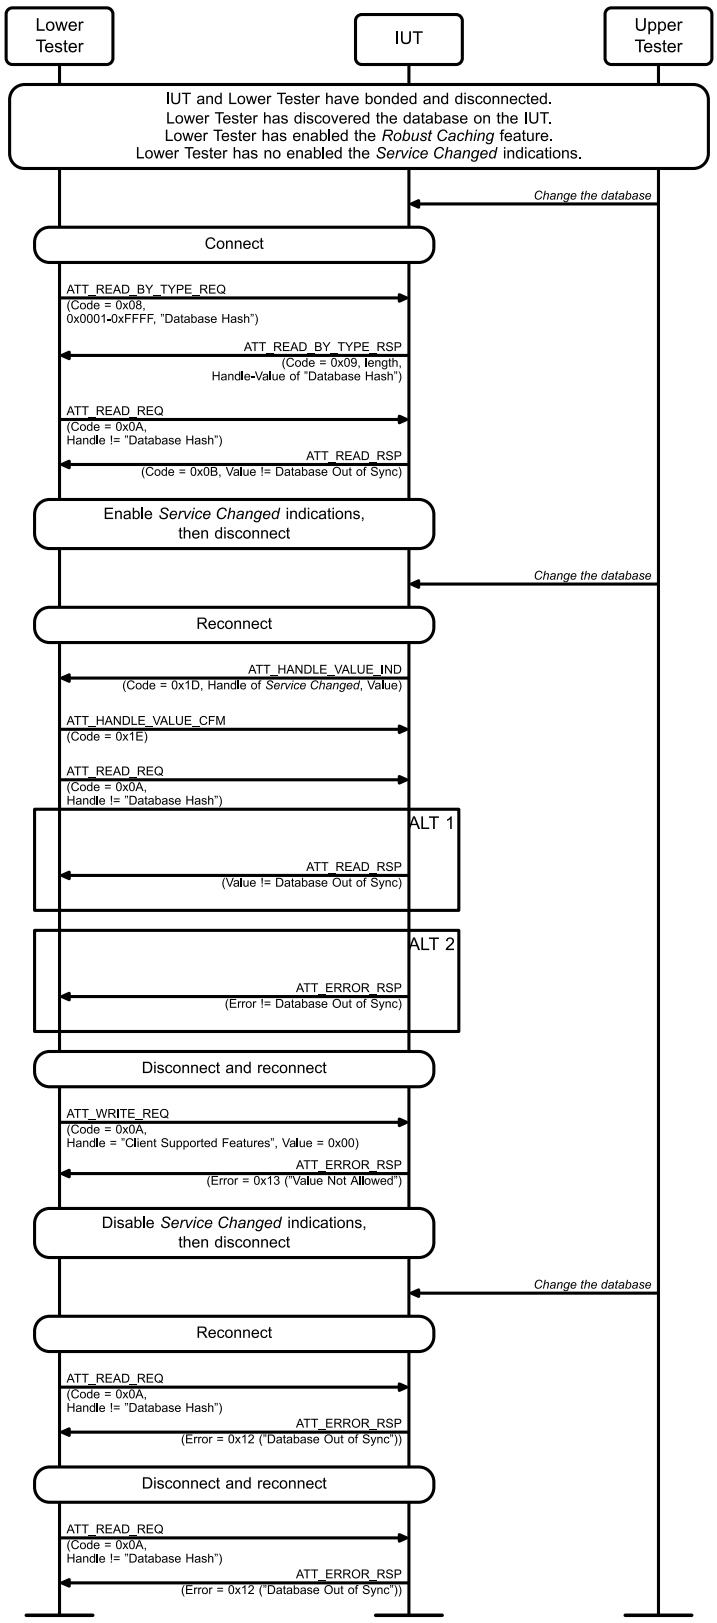


Figure 4.89: GATT/SR/GAS/BV-07-C [Handling Client Requests after a Hash Read or Service Changed Indication – Database Changed between Connections] MSC

1. The Upper Tester orders the IUT to change its GATT database by adding or removing services and/or characteristics, then the Lower Tester creates a connection with the IUT.
2. The Lower Tester executes the GATT Read Using Characteristic UUID sub-procedure on the Database Hash characteristic.
3. The Lower Tester executes the GATT Characteristic Value Read sub-procedure on another characteristic (different than the Database Hash characteristic) and expects the IUT to return either the characteristic value or a different error code. If the Database Out of Sync error is returned, the test ends with a Fail verdict.
4. The Lower Tester enables indications on the «Service Changed» characteristic, then it terminates the connection.
5. Repeat Step 1 and wait for the IUT to send an indication on the «Service Changed» characteristic. If the indication is not received within 30 seconds, the test ends with a Fail verdict.
6. The Lower Tester confirms the indication, then repeat Step 3.
7. The Lower Tester terminates the connection, then reconnects, and then it executes a GATT Characteristic Value Write procedure on the Client Supported Features characteristic, setting the Robust Caching bit to 0, and expects the IUT to return the Value Not Allowed error.
8. The Lower Tester disables indications on the «Service Changed» characteristic, then it terminates the connection, then repeat Step 1, and then the Lower Tester executes the GATT Characteristic Value Read sub-procedure on another characteristic (different than the Database Hash characteristic) and expects the IUT to return the Database Out of Sync error.
9. The Lower Tester terminates the connection, then reconnects, and then it executes the GATT Characteristic Value Read sub-procedure on another characteristic (different than the Database Hash characteristic) and expects the IUT to return the Database Out of Sync error.

- Expected Outcome

  Pass verdict

  In both executions of Step 3, the IUT does not return the Database Out of Sync error.

  In Step 7, the IUT returns the Value Not Allowed error.

  In Steps 8 and 9, the IUT returns the Database Out Of Sync error.

GATT/SR/GAS/BV-08-C [Handling Read Multiple Variable Length Requests on Unsynchronized Database]

- Test Purpose

  Verify that the IUT acting as GATT Server handles Read Multiple Variable Length Requests from a Client on an unsynchronized database based on the Robust Caching feature being enabled or disabled.

- Reference

  [11] 2.5.2, 7.2, 4.8.5

  [12] 3.4.4.11, 3.4.4.12

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.4 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The GATT database on the IUT contains at least two characteristics that supports the GATT Characteristic Value Read sub-procedure and at least one characteristic that supports the GATT Write Without Response sub-procedure. Any change on the GATT database during the test procedure will not affect these characteristics.
  - The handles of the characteristics are known to the Lower Tester.
  - The Lower Tester does not enable indications on the «Service Changed» characteristic.
  - The Lower Tester has not enabled the Robust Caching feature.
  - There is no bond between the IUT and the Lower Tester.

- Test Procedure

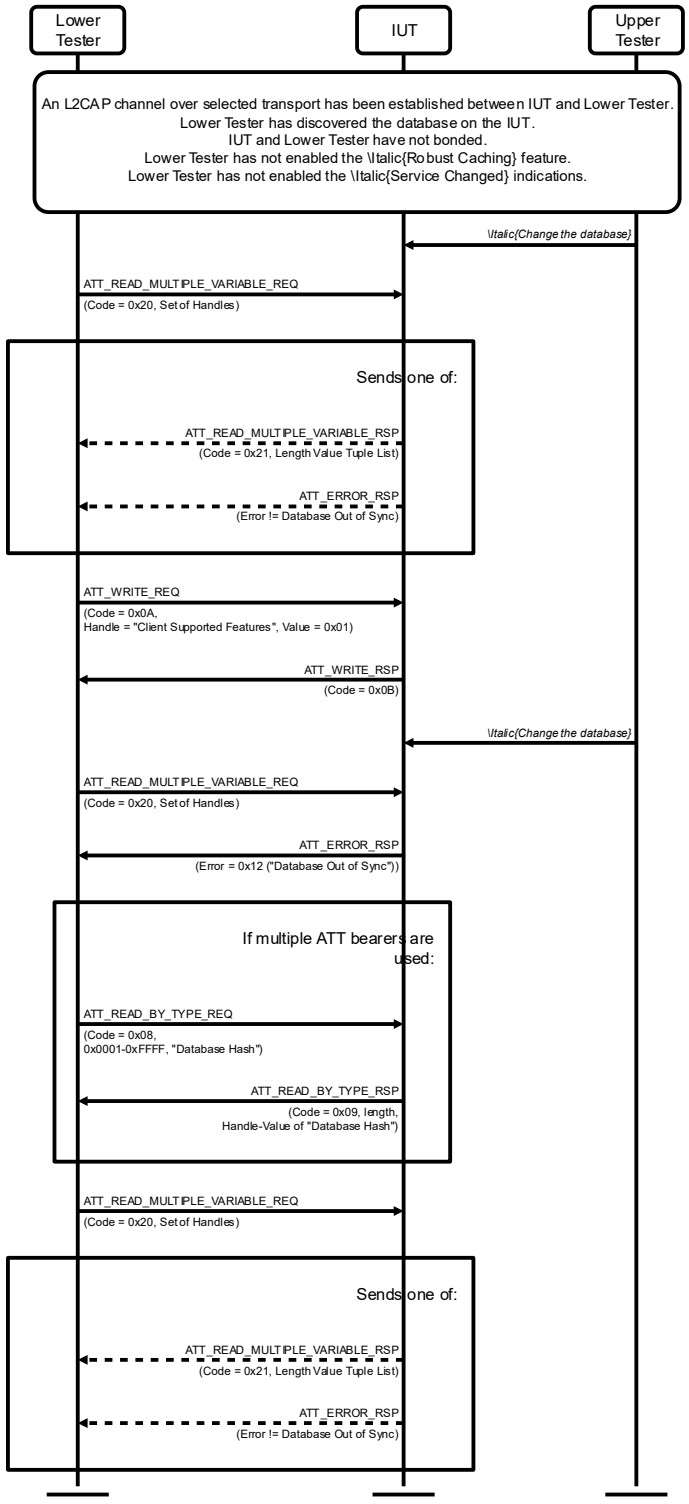


Figure 4.90: GATT/SR/GAS/BV-08-C [Handling Read Multiple Variable Length Requests on Unsynchronized Database] MSC

1. The Upper Tester orders the IUT to change its GATT database by adding or removing services and/or characteristics.
2. The Lower Tester sends an ATT_READ_MULTIPLE_VARIABLE_REQ PDU (Code = 0x20) to the IUT using the known set of readable handles (other than the *Database Hash* characteristic).
3. The IUT sends an ATT_READ_MULTIPLE_VARIABLE_RSP PDU (Code = 0x21) to the Lower Tester containing the values of the characteristics selected by the set of handles in Step 2 or an error code. If the “Database Out of Sync” error is returned, the test ends with a Fail verdict.
4. The Lower Tester executes a GATT Characteristic Value Write procedure on the «Client Supported Features» characteristic, setting the *Robust Caching* bit to 1.
5. The IUT sends an ATT_WRITE_RSP PDU to the Lower Tester.
6. Repeat Step 1.
7. The Lower Tester executes the GATT Read Multiple Variable Length Characteristic Values sub-procedure on a known set of readable characteristics (other than the Database Hash characteristic).
8. The IUT sends an ATT_ERROR_RSP PDU with the Error set to “Database Out of Sync”.
9. When multiple ATT bearers are used, the Lower Tester executes the GATT Characteristic Value Read sub-procedure on the *Database Hash* characteristic.
10. The IUT sends an ATT_READ_RSP PDU with the *Database Hash* characteristic value.
11. Repeat Steps 2 and 3.

- Expected Outcome

  Pass verdict

  In Step 8, the IUT returns the “Database Out of Sync” error.

  In Steps 3 and 11, the IUT does not return the “Database Out of Sync” error.

  In Step 9, the IUT returns the *Database Hash* characteristic value.

  Fail verdict

  In Step 3 or 8, the IUT returns the “Database Out of Sync” error.

4.9.1 Enabling the Features in Client Supported Features

- Test Purpose

  Verify that the IUT acting as GATT Client can enable each supported feature on the Server.

- Reference

  [10] 2.5.2.1, 7.2

- Initial Condition

  - The Lower Tester sets the EATT Supported bit set to 1 in the Server Supported Features characteristic.
  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel between the IUT and the Lower Tester.
  - A preamble procedure defined in Section 4.2.3.2 is used to inform the Lower Tester that the IUT supports the Enhanced ATT bearer feature.
  - The IUT has discovered the Client Supported Features characteristic and has saved the handle of the characteristic value.
  - There is no bond between the IUT and the Lower Tester.

- Test Case Configuration

Test Case	Bit	Client Feature
GATT/CL/GAS/BV-04-C	1	Enhanced ATT bearer
GATT/CL/GAS/BV-05-C	2	Multiple Handle Value Notifications

Table 4.38: Enabling the Features in Client Supported Features test cases

- Test Procedure

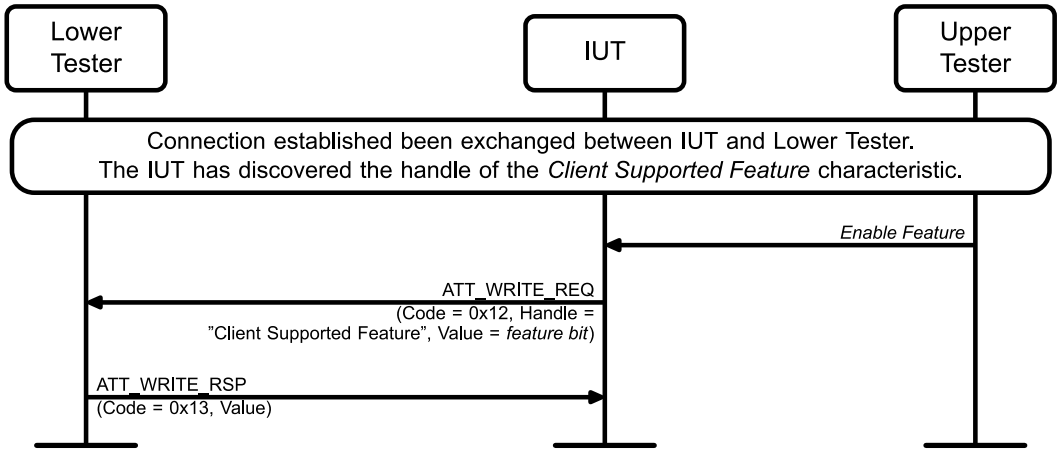


Figure 4.91: Enabling the Features in Client Supported Features MSC

1. The Upper Tester orders the IUT to enable the Client Feature in Table 4.38.
2. The IUT performs a GATT Characteristic Value Write procedure on the Client Supported Features characteristic, setting the corresponding bit in Table 4.38 to 1 and all RFU bits to 0.
3. The Lower Tester acknowledges the request sending an ATT_WRITE_RSP PDU to the IUT.

- Expected Outcome

  Pass verdict

  The IUT executes a GATT Characteristic Value Write procedure on the Client Supported Features characteristic, correctly setting the feature bit in Table 4.38 to 1, and setting all RFU bits to 0.

4.10 GATT Transaction Timeouts

Check the IUT's response to GATT transaction timeouts.

4.10.1 Read Characteristic Value – Timeouts

- Test Purpose

  Verify that an IUT detects peer role timeout after a request or indication, notifies the Upper Tester, and does not retry the request or indication.

- Reference

  [1] 4.8.1, 4.8.5, 4.9.3, 4.11.1, 4.14

  [5] 3.3.3, 3.4.4.3, 3.4.7.2, 3.4.4.11

- Initial Condition
  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
- Test Case Configuration

Test Case	Additional Initial Condition	GATT Command	ATT PDU
GATT/CL/GAT/BV-01-C [Read Characteristic Value – Server Timeout]	N/A	GATT Read Request(Valid Handle)	ATT_READ_REQ
GATT/CL/GAT/BV-02-C [Write Characteristic Value – Server Timeout]	The Lower Tester contains at least one valid characteristic, and the handle of this characteristic is known to the Upper Tester. The Lower Tester has the necessary security permissions from the IUT to write a characteristic.	GATT Write Request(Handle, New Value)	ATT_WRITE_REQ
GATT/SR/GAT/BV-01-C [Handle Value Indication – Client Timeout]	A preamble procedure defined in Section 4.2.2.2 is used to configure the characteristic for Indication.	GATT Handle Value Indication (Characteristic Handle)	ATT_HANDLE_ VALUE_IND
GATT/CL/GAT/BV-03-C [Read Multiple Variable Length Characteristic Values – Server Timeout]	N/A	GATT Read Multiple Variable Length Request(Set Of Handles = [Set1])	ATT_READ_ MULTIPLE_ VARIABLE_REQ

Table 4.39: Read Characteristic Value – Timeouts test cases

- Test Procedure

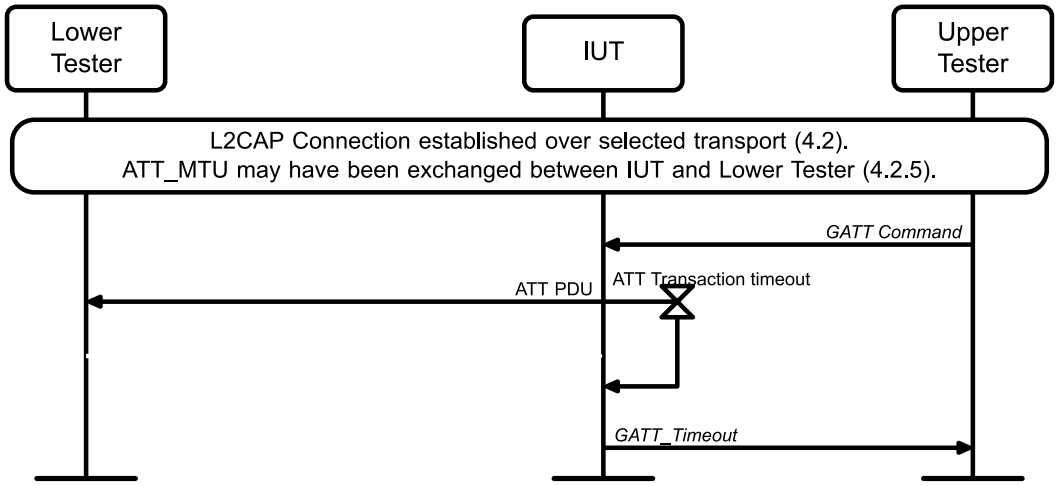


Figure 4.92: Read Characteristic Value - Timeouts MSC

1. The Upper Tester sends a request to the IUT as indicated in Table 4.39, column GATT Command, by specifying the characteristic handle(s) and/or value(s).
2. The IUT sends an ATT PDU to the Lower Tester as indicated in Table 4.39, column ATT PDU, with the characteristic handle(s) and/or value(s) received in Step 1.
3. The Lower Tester does not send any PDU to the IUT.
4. The IUT detects the timeout and sends a notification to the Upper Tester, e.g., GATT Timeout.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends a correctly formatted ATT PDU to the Lower Tester, with the selected parameters, as indicated in Table 4.39, column ATT PDU.

  After the specified timeout (Section 3.3.3 of ATT [5]), the IUT sends a notification to the Upper Tester. A test system may allow up to a +/- 1 second deviation of the 30 second timeout to accommodate timer synchronization issues caused by the testing environment.

4.11 Generic Profile Attributes

Verify the format and integrity of generic attributes when read by a client or when provided by a server.

GATT/CL/GPA/BV-12-C [Characteristic Format Descriptors – from Client]

- Test Purpose

  Verify that a Generic Attribute Profile client (IUT) can read and interpret a Characteristic Value whose format and unit is defined by the Characteristic Presentation Format. The format, unit and value are not known to the IUT before the test.

- Reference

  [1] 3.3, 4.7.1, 4.8

  [5] 3.3.1, 3.4.4.3

- Initial Condition
  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The handle range of the characteristic used for the test is communicated to the IUT.
- Test Procedure

  Repeat the following procedure five times.

  1. Execute any of the following procedures; however, the Lower Tester responds with different and random: characteristic, formats, and exponents (where applicable), as specified in Table 4.40:
     - GATT/CL/GAR/BV-06-C [Read Characteristic Descriptor – by Client]
     - GATT/CL/GAR/BV-01-C [Read Characteristic Value – by Client]
     - GATT/CL/GAR/BV-04-C [Read Long Characteristic Value – by Client]
  2. The IUT reports the information with the correct formatting and unit to the Upper Tester.

Characteristic Format Descriptor	Value Range (hex)		Value Length	Exponent Range (decimal)	
	min	max	(octets)	min	max
boolean	0	0x1	1	n/a	
2 bit	0	0x3	1	n/a	
nibble	0	0xF	1	n/a	
uint8	0	0xFF	1	-128	127
uint12	0	0xFFF	2	-128	127
uint16	0	0xFFFF	2	-128	127
uint24	0	0xFF.FFFF	3	-128	127
uint32	0	0xFFFF.FFFF	4	-128	127
uint48	0	0xFFFF.FFFF.FFFF	6	-128	127
uint64	0	0xFFFF.FFFF.FFFF.FFFF	8	-128	127
unit128	0	0xFFFF.FFFF.FFFF.FFFF.FFFF.FFFF.FFFF.FFFF	16	-128	127
sint8	0	0xFF	1	-128	127
sint12	0	0xFFF	2	-128	127
sint16	0	0xFFFF	2	-128	127
sint24	0	0xFF.FFFF	3	-128	127
sint32	0	0xFFFF.FFFF	4	-128	127

Characteristic Format Descriptor	Value Range (hex)		Value Length	Exponent Range (decimal)	
	min	max	(octets)	min	max
sint48	0	0xFFFF.FFFF.FFFF	6	-128	127
sint64	0	0xFFFF.FFFF.FFFF.FFFF	8	-128	127
sint128	0	0xFFFF.FFFF.FFFF.FFFF.FFFF.FFFF.FFFF.FFFF	16	-128	127
float32	0	0xFFFF.FFFF	4	n/a	
float64	0	0xFFFF.FFFF.FFFF.FFFF	8	n/a	
SFLOAT	0	0xFFFF	2	n/a	
FLOAT	0	0xFFFF.FFFF	4	n/a	
duint16	0, 0	0xFFFF, 0xFFFF	4	n/a	
utf8s	n/a		variable	n/a	
utf16s	n/a		variable	n/a	
struct	n/a		variable	n/a	

Table 4.40: Characteristic Format Descriptor for random choice in test cases – for Client IUT

- Expected Outcome

  Pass verdict

  In the case of utf8s, utf16s and struct formats, the number of individual elements (e.g., characters) matches the number of elements presented by the Lower Tester.

  In the case of struct format, the IUT is not required to decompose the contents of the structure.

- Notes

  The test assumes that the GATT upper edge provides sufficient capabilities to verify the validity of the Characteristic Value whose format and unit is defined by the Characteristic Presentation Format.

  The presentation of value, exponent and unit is implementation dependent and may vary from the presentation of e.g., separate value, exponent and unit up to strings containing a human-readable interpretation of value and unit.

  As long as this may be verified, the capabilities are up to the implementer of the IUT to define, among other alternatives implementers may choose raw format or complete interpreted structure.

  Non-exhaustive Examples:

  #1 [Characteristic sint16 Format Descriptor, by client]:
  The Lower Tester presents the following field values to the IUT:

  - Characteristic Value = 0xF025
  - Format = 0x0E

- Exponent = 0xFB
- Unit = 0x27AC

The result presented by the IUT to the Upper Tester is:

- -0.04059 ˚F

#2 [Characteristic sint16 Format Descriptor, by client]:
The Lower Tester presents the following field values to the IUT:

- Characteristic Value = 0xF025
- Format = 0x0E
- Exponent = 0xFB
- Unit = 0x27AC

The result presented by the IUT to the Upper Tester is in the form of four individual elements:

- [value, format, exponent, unit] = [0xF025, 0x0E, 0x0FB, 0x27AC]

#3 [Characteristic FLOAT Format Descriptor, by client]:
The Lower Tester presents the following field values to the IUT:

- Characteristic Value = 0x4162.2B4A.BB55.CD44
- Format = 0x15
- Exponent = n/a
- Unit = 0x2782

The result presented by the IUT to the Upper Tester is:

- 9.5258458542238547e+6 Ångström

#4 [Characteristic utf16s Format Descriptor, by client]:
The Lower Tester presents the following field values to the IUT:

Characteristic Value = 0x1F08.03C1.03C7.03B9.03BC.03AE.03B4.03B7.03C2

Format = 0x1A

Exponent = n/a

Unit = 0x2700

The result presented by the IUT to the Upper Tester is:

- Ἀρχιμήδης

  (‘Archimedes’ in Greek letters)

GATT/SR/GPA/BV-12-C [Characteristic Presentation Format Descriptors – from Server]

- Test Purpose

  Verify that a Generic Attribute Profile server (IUT) can report a Characteristic Value whose format and unit is defined by the Characteristic Presentation Format.

- Reference

  [1] 3.3, 3.3.3.5, 4.7, 4.8

  [5] 3.3.1, 3.4.4.2, 3.4.4.4, 3.4.4.6

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The server IUT is configured with a test database that meets conditions described in Table 4.41. The Upper Tester and the Lower Tester have access to the same database.

- Test Procedure

  Execute the following procedure with a random Characteristic Value and format requested by the Lower Tester.

  1. Send an ATT_FIND_INFORMATION_REQ PDU from the Lower Tester to read the characteristic properties, using a handle range that will select the Characteristic Presentation Format Descriptor from the test database, and the type set to «Characteristic Format».
  2. On receipt of the IUT response, send an ATT_READ_REQ PDU, and/or a series of ATT_READ_BLOB_REQ PDUs, from the Lower Tester to the IUT to read the Characteristic Value, or Long Characteristic Value. The Lower Tester will request random combinations of Characteristic Value, exponent and unit within the ranges defined by Table 4.41.
  3. Characteristic Value, exponent and unit are randomly specified in the test database by the Lower Tester according to Table 4.41.

Valid Format	Value Range (hex)		Value Length	Exponent Range (decimal)	
	min	max	(octets)	min	max
boolean	0	0x1	1	n/a	
2bit	0	0x3	1	n/a	
nibble	0	0xF	1	n/a	
uint8	0	0xFF	1	-128	127
uint12	0	0xFFF	2	-128	127
uint16	0	0xFFFF	2	-128	127
uint24	0	0xFF. FFFF	3	-128	127
uint32	0	0xFFFF.FFFF	4	-128	127
uint48	0	0xFFFF.FFFF.FFFF	6	-128	127
uint64	0	0xFFFF.FFFF.FFFF.FFFF	8	-128	127
unit128	0	0xFFFF.FFFF.FFFF.FFFF. FFFF.FFFF.FFFF.FFFF	16	-128	127
sint8	0	0xFF	1	-128	127
sint12	0	0xFFF	2	-128	127
sint16	0	0xFFFF	2	-128	127

Valid Format	Value Range (hex)		Value Length	Exponent Range (decimal)	
	min	max	(octets)	min	max
sint24	0	0xFF.FFFF	3	-128	127
sint32	0	0xFFFF.FFFF	4	-128	127
sint48	0	0xFFFF.FFFF.FFFF	6	-128	127
sint64	0	0xFFFF.FFFF.FFFF.FFFF	8	-128	127
sint128	0	0xFFFF.FFFF.FFFF.FFFF.FFFF.FFFF.FFFF.FFFF	16	-128	127
float32	0	0xFFFF.FFFF	4	n/a	
float64	0	0xFFFF.FFFF.FFFF.FFFF	8	n/a	
SFLOAT	0	0xFFFF	2	n/a	
FLOAT	0	0xFFFF.FFFF	4	n/a	
duint16	0, 0	0xFFFF, 0xFFFF	4	n/a	
utf8	n/a		variable	n/a	
utf16	n/a		variable	n/a	
struct	n/a		variable	n/a	

Table 4.41: Characteristic Format Descriptor test cases - for server IUT

- Expected Outcome

  Pass verdict

  In response to the ATT_FIND_INFORMATION_REQ PDU the IUT sends a correctly formatted Characteristic Presentation Format Descriptor. The length of any variable length characteristics sent by the IUT has to match the one in the database.

  In response to the ATT_READ_REQ PDU, or series of ATT_READ_BLOB_REQ PDUs, the IUT sends a Characteristic Value correctly formatted to match the Characteristic Format contained in the Characteristic Presentation Format Descriptor.

- Notes

  The test assumes that the GATT upper edge provides sufficient capabilities to verify the validity of the Characteristic Value whose format and unit is defined by the Characteristic Presentation Format.

  The presentation of value, exponent and unit is implementation dependent and may vary from the presentation of, e.g., separate value, exponent and unit up to strings containing a human-readable interpretation of value and unit.

  As long as this may be verified, the capabilities are up to the implementer of the IUT to define, among other alternatives implementers may choose raw format or complete interpreted structure.

GATT/CL/GPA/BV-11-C [Characteristic Aggregate Format – by Client]

- Test Purpose

  Verify that a Generic Attribute Profile client (IUT) can read and interpret a Characteristic Value whose format and unit is defined by several Characteristic Presentation Formats that are concatenated by a

Characteristic Aggregate Format descriptor. The formats, units and values are not known to the IUT before the test.

- Reference

  [1] 3.3.3.6, 4.7.1, 4.8

  [5] 3.3.1, 3.4.4.3

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The handle range of the Characteristic used for the test is communicated to the IUT.

- Test Procedure

  Repeat the following procedure five times.

  1. Execute any of the following procedures; however, the Lower Tester responds with a random number (two or more) of individual values concatenated by a Characteristic Aggregate Format descriptor. The Characteristic format and exponents for each of the values as well as the values themselves are randomly chosen from Table 4.42:
     - GATT/CL/GAR/BV-06-C [Read Characteristic Descriptor – by Client]
     - GATT/CL/GAR/BV-01-C [Read Characteristic Value – by Client]
     - GATT/CL/GAR/BV-04-C [Read Long Characteristic Value – by Client]
  2. The IUT reports the information with the correct formatting and unit to the Upper Tester.

Value Format	Value Range (hex)		Value Length	Exponent Range (decimal)	
	min	max		min	max
boolean	0	0x1	1 bit	n/a	
2bit	0	0x3	2 bit	n/a	
nibble	0	0xF	4 bit	n/a	
uint8	0	0xFF	1 octet	-128	127
uint12	0	0xFFF	2 octets	-128	127
uint16	0	0xFFFF	2 octets	-128	127
uint24	0	0xFF.FFFF	3 octets	-128	127
uint32	0	0xFFFF.FFFF	4 octets	-128	127
uint48	0	0xFFFF.FFFF.FFFF	6 octets	-128	127
uint64	0	0xFFFF.FFFF.FFFF.FFFF	8 octets	-128	127
unit128	0	0xFFFF.FFFF.FFFF.FFFF.FFFF.FFFF.FFFF.FFFF	16 octets	-128	127
sint8	0	0xFF	1 octet	-128	127
sint12	0	0xFFF	2 octets	-128	127

Value Format	Value Range (hex)		Value Length	Exponent Range (decimal)	
	min	max		min	max
sint16	0	0xFFFF	2 octets	-128	127
sint24	0	0xFF.FFFF	3 octets	-128	127
sint32	0	0xFFFF.FFFF	4 octets	-128	127
sint48	0	0xFFFF.FFFF.FFFF	6 octets	-128	127
sint64	0	0xFFFF.FFFF.FFFF.FFFF	8 octets	-128	127
sint128	0	0xFFFF.FFFF.FFFF.FFFF.FFFF.FFFF.FFFF.FFFF	16 octets	-128	127
float32	0	0xFFFF.FFFF	4 octets	n/a	
float64	0	0xFFFF.FFFF.FFFF.FFFF	8 octets	n/a	
SFLOAT	0	0xFFFF	2 octets	n/a	
FLOAT	0	0xFFFF.FFFF	4 octets	n/a	
duint16	0, 0	0xFFFF, 0xFFFF	4 octets	n/a	

Table 4.42: Characteristic Format selection table - for client IUT

- Expected Outcome

  Pass verdict

  The IUT presents the correct amount of Characteristic Values with the exponent applied (if defined for that format) correctly formatted according to the Format field with unit to the Upper Tester.

- Notes

  The Lower Tester stores all Characteristic Value data as specified in Section 3.3.3.5.2 of GATT [1].

GATT/SR/GPA/BV-11-C [Characteristic Aggregate Format – by Server]

- Test Purpose

  Verify that a Generic Attribute Profile server (IUT) can report an aggregate Characteristic Value whose format and unit is defined by concatenating several Characteristic Presentation Formats.

- Reference

  [1] 3.3.3.6, 4.7.1, 4.8

  [5] 3.3.1, 3.4.4.2, 3.4.4.4, 3.4.4.6

- Initial Condition

  - A preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The server IUT is configured with a test database, which contains at least 5 aggregate format descriptors having the presentation formation from Table 4.43.

- Test Procedure

  Repeat the following test procedure five times:

  1. The Lower Tester sends an ATT_READ_BY_TYPE_REQ PDU to the IUT with a random number (two or more) of individual values concatenated by a Characteristic Aggregate Format descriptor, and handle range randomly chosen from Table 4.43.
  2. The IUT sends an ATT_READ_BY_TYPE_RSP PDU with characteristic aggregate descriptor to the Lower Tester.
  3. The Lower Tester sends an ATT_READ_BY_TYPE_REQ PDU, and/or a series of ATT_READ_BLOB_REQ PDUs to the IUT to read the Characteristic Aggregate Values (including any Long Characteristic Values) randomly chosen from Table 4.43.
  4. The IUT sends an ATT_READ_RSP PDU with characteristic aggregate values to the Lower Tester.

Value Format	Value Range (hex)		Value Length	Exponent Range (decimal)	
	min	max		min	max
boolean	0	0x1	1 bit	n/a	
2bit	0	0x3	2 bit	n/a	
nibble	0	0xF	4 bit	n/a	
uint8	0	0xFF	1 octet	-128	127
uint12	0	0xFFF	2 octets	-128	127
uint16	0	0xFFFF	2 octets	-128	127
uint24	0	0xFF.FFFF	3 octets	-128	127
uint32	0	0xFFFF.FFFF	4 octets	-128	127
uint48	0	0xFFFF.FFFF.FFFF	6 octets	-128	127
uint64	0	0xFFFF.FFFF.FFFF.FFFF	8 octets	-128	127
unit128	0	0xFFFF.FFFF.FFFF.FFFF. FFFF.FFFF.FFFF.FFFF	16 octets	-128	127
sint8	0	0xFF	1 octet	-128	127
sint12	0	0xFFF	2 octets	-128	127
sint16	0	0xFFFF	2 octets	-128	127
sint24	0	0xFF.FFFF	3 octets	-128	127
sint32	0	0xFFFF.FFFF	4 octets	-128	127
sint48	0	0xFFFF.FFFF.FFFF	6 octets	-128	127
sint64	0	0xFFFF.FFFF.FFFF.FFFF	8 octets	-128	127
sint128	0	0xFFFF.FFFF.FFFF.FFFF. FFFF.FFFF.FFFF.FFFF	16 octets	-128	127
float32	0	0xFFFF.FFFF	4 octets	n/a	
float64	0	0xFFFF.FFFF.FFFF.FFFF	8 octets	n/a	
SFLOAT	0	0xFFFF	2 octets	n/a	
FLOAT	0	0xFFFF.FFFF	4 octets	n/a	
duint16	0, 0	0xFFFF, 0xFFFF	4 octets	n/a	

Table 4.43: Characteristic Format selection table - for server IUT

- Expected Outcome

  Pass verdict

  In Steps 2 and 4, the IUT presents correctly a correctly formatted Aggregated Characteristic Value according to the Format fields in the reported Aggregate Characteristic Descriptor, including applicable exponent fields, with units to the Upper Tester. The IUT stores all Characteristic value data as specified in Section 3.3.3.5.2 of GATT [1].

- Notes

  The test assumes that the GATT value whose format and unit is defined by the Characteristic Presentation Format.

  The presentation of value, exponent and unit is implementation dependent and may vary from the presentation of e.g., separate value, exponent and unit up to strings containing a human-readable interpretation of value and unit.

  As long as this may be verified, the capabilities are up to the implementer of the IUT to define, among other alternatives implementers may choose raw format or complete interpreted structure.

4.12 Multiple ATT Bearer Support

Verify that the Generic Attribute Profile server properly handles the client configuration characteristic with a single device accessing the Generic Attribute Profile server using multiple Attribute Protocol bearers.

4.12.1 Client Characteristic Configuration Descriptor per ATT Client

- Test Purpose

  Verify how a Generic Attribute Profile server handles the same Client Characteristic Configuration Descriptor for an ATT client, irrespective of the bearer types and the number of bearers between them.

- Reference

  [11] 3.3.3

- Initial Condition

  - The IUT sets the EATT Supported bit set in the Server Supported Features characteristic as specified in Table 4.44. If no bits in the characteristic would be set to 1, the characteristic need not be present. Does not apply to GATT/SR/GPM/BV-13-C.
  - A preamble procedure defined in Section 4.2.3.1 is used to inform the IUT that the Lower Tester supports the Enhanced ATT bearer feature. Does not apply to GATT/SR/GPM/BV-13-C.
  - Preamble procedures defined in Sections 4.2.1.1, 4.2.1.2, 4.2.1.3, and 4.2.1.4 are used to set up one of each transport and L2CAP channel, as specified in Table 4.44.
  - The Lower Tester has the necessary security permissions from the IUT to write the Client Characteristic Configuration descriptor.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - The Lower Tester has discovered a characteristic that supports Notification.
  - At least two bearers are set up to be active simultaneously.

- Test Case Configuration

Test Case	Transport Bearer 1	Transport Bearer 2	EATT Supported bit	CCCD Value
GATT/SR/GPM/BV-01-C	ATT over BR/EDR	ATT over LE	0 or 1	1
GATT/SR/GPM/BV-02-C	ATT over BR/EDR	EATT over BR/EDR	1	1
GATT/SR/GPM/BV-03-C	ATT over BR/EDR	EATT over LE	1	1
GATT/SR/GPM/BV-04-C	ATT over LE	EATT over BR/EDR	1	1
GATT/SR/GPM/BV-05-C	ATT over LE	EATT over LE	1	1
GATT/SR/GPM/BV-06-C	EATT over BR/EDR	EATT over LE	1	1
GATT/SR/GPM/BV-13-C	ATT over LE	ATT over BR/EDR	N/A	0

Table 4.44: Client Characteristic Configuration Descriptor per ATT Client test cases

- Test Procedure

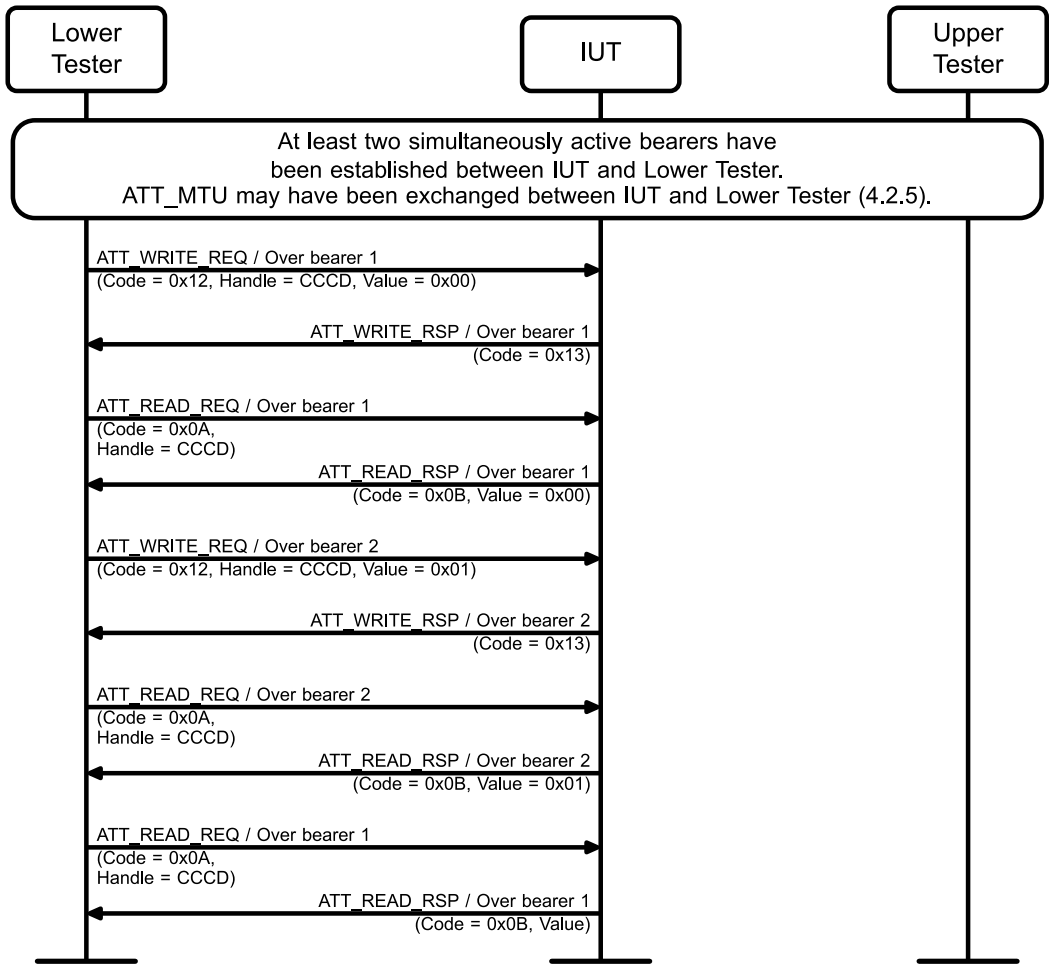


Figure 4.93: Client Characteristic Configuration Descriptor per ATT Client MSC

1. The Lower Tester sends an ATT_WRITE_REQ PDU to the IUT over transport bearer 1 to set the Client Characteristic Configuration Descriptor (CCCD) to 0x00.
2. The IUT sends an ATT_WRITE_RSP PDU to the Lower Tester over transport bearer 1.
3. The Lower Tester sends an ATT_READ_REQ PDU to the IUT over transport bearer 1 to read the CCCD.
4. The IUT sends an ATT_READ_RSP PDU to the Lower Tester over transport bearer 1 with the CCCD set to 0x00.
5. The Lower Tester sends an ATT_WRITE_REQ PDU to the IUT over transport bearer 2 to set the CCCD to 0x01.
6. The IUT sends an ATT_WRITE_RSP PDU to the Lower Tester over transport bearer 2.
7. The Lower Tester sends an ATT_READ_REQ PDU to the IUT over transport bearer 2 to read the CCCD.
8. The IUT sends an ATT_READ_RSP PDU to the Lower Tester over transport bearer 2 with the CCCD set to 0x01.
9. The Lower Tester sends an ATT_READ_REQ PDU to the IUT over transport bearer 1 to read the CCCD.
10. The IUT sends an ATT_READ_RSP PDU to the Lower Tester over transport bearer 1 with the CCCD set to the value indicated in Table 4.44, column CCCD Value.

- Expected Outcome

  Pass verdict

  In Step 4, the IUT returns the CCCD set to 0x00 on bearer 1.

  In Step 8, the IUT returns the CCCD set to 0x01 on bearer 2.

  In Step 10, the IUT returns the CCCD set to the value indicated in Table 4.44, column CCCD Value, on bearer 1.

4.12.2 Multiple Client Read Requests on Unsynchronized Database with Robust Caching

- Test Purpose

  Verify that the IUT acting as a GATT Client waits to read the Database Hash characteristic value until a response has been sent for all pending ATT bearer Client requests on an unsynchronized database with the Robust Caching feature being enabled.

- Reference

  [14] 2.5.2

- Initial Condition

  - A preamble procedure defined in Section 4.2.3.2 is used to inform the Lower Tester that the IUT supports the Enhanced ATT bearer feature.
  - Preamble procedures defined in Sections 4.2.1, 4.2.1.3, and 4.2.1.4 are used to set up one of each transport and L2CAP channel over LE and BR/EDR, as specified in Table 4.45.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
  - A preamble procedure defined in Section 4.2.2.1 is used to configure the characteristic for Notification on the ATT or EATT bearer over LE, as specified in Table 4.45.
  - A preamble procedure defined in Section 4.2.2.1 is used to configure the characteristic for Indications on the ATT or EATT bearer over BR/EDR, as specified in Table 4.45.

- Two bearers are set up to be active simultaneously.
- The GATT database on the Lower Tester contains at least one characteristic that supports the GATT Characteristic Value Read sub-procedure.
- The IUT has discovered the characteristics on the Lower Tester and has saved the handles of their values.
- The IUT does not enable indications on the «Service Changed» characteristic.
- The IUT has enabled the Robust Caching feature.
- There is no bond between the IUT and the Lower Tester.

- Test Case Configuration

Test Case	Transport Bearer 1	Transport Bearer 2
GATT/CL/GPM/BV-07-C	ATT over BR/EDR	ATT over LE
GATT/CL/GPM/BV-08-C	ATT over BR/EDR	EATT over BR/EDR
GATT/CL/GPM/BV-09-C	ATT over BR/EDR	EATT over LE
GATT/CL/GPM/BV-10-C	ATT over LE	EATT over BR/EDR
GATT/CL/GPM/BV-11-C	ATT over LE	EATT over LE
GATT/CL/GPM/BV-12-C	EATT over BR/EDR	EATT over LE

Table 4.45: Characteristic Format selection table - for server IUT test cases

- Test Procedure

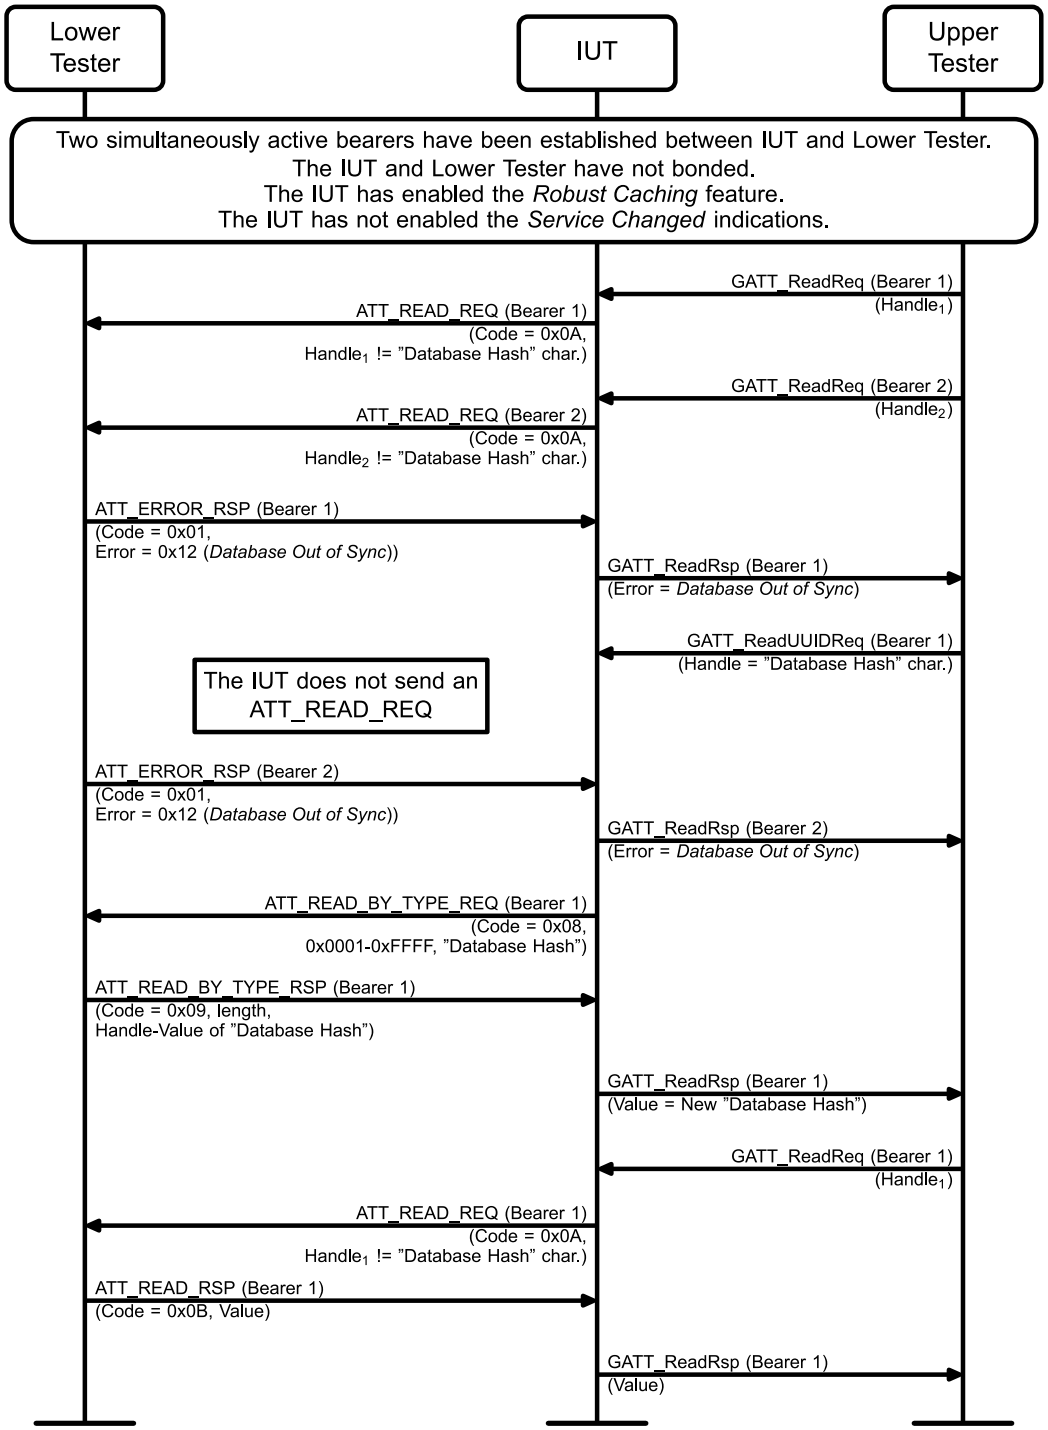


Figure 4.94: Multiple Client Read Requests on Unsynchronized Database with Robust Caching MSC

1. The Lower Tester changes its GATT database by adding or removing services and/or characteristics.
2. The Upper Tester sends a GATT Characteristic Value Read sub-procedure request to the IUT on Bearer 1 on a characteristic (other than the Database Hash characteristic).
3. The IUT sends the ATT_READ_REQ PDU to the Lower Tester for Bearer 1 using the characteristic received in Step 2.

4. The Upper Tester sends a GATT Characteristic Value Read sub-procedure request to the IUT on Bearer 2 on a characteristic (other than the Database Hash characteristic).
5. The IUT sends the ATT_READ_REQ PDU to the Lower Tester for Bearer 2 using the characteristic received in Step 4.
6. The Lower Tester sends an ATT_ERROR_RSP PDU to the IUT on Bearer 1 with Error Code set to “Database Out Of Sync”, 0x12.
7. The IUT sends a GATT Characteristic Value Read Response to the Upper Tester with the “Database Out of Sync (0x12)” Error Code.
8. The Upper Tester sends a GATT Read Using Characteristic UUID sub-procedure request to the IUT on Bearer 1 containing the UUID of the Database Hash characteristic.
9. The IUT does not send an ATT_READ_BY_TYPE_REQ PDU to the Lower Tester with the UUID of the Database Hash characteristic.
10. The Lower Tester sends an ATT Error Response to the IUT on Bearer 2 with Error Code set to “Database Out Of Sync”, 0x12.
11. The IUT sends a GATT Characteristic Value Read Response to the Upper Tester with the “Database Out of Sync (0x12)” Error Code.
12. The IUT sends the ATT_READ_BY_TYPE_REQ PDU to the Lower Tester for Bearer 1 containing the UUID of the Database Hash characteristic received.
13. The Lower Tester sends an ATT_READ_BY_TYPE_RSP PDU to the IUT on Bearer 1 containing the handle and value of the new Database Hash.
14. The Upper Tester sends a GATT Characteristic Value Read sub-procedure request to the IUT on Bearer 1 on a characteristic (other than the Database Hash characteristic).
15. The IUT sends the ATT_READ_REQ PDU to the Lower Tester for Bearer 1 using the characteristic received in Step 14.
16. The Lower Tester sends an ATT_READ_RSP PDU to the IUT on Bearer 1 containing the handle and value of the requested characteristic.
17. The IUT sends a GATT Characteristic Value Read Response to the Upper Tester with the characteristic value received in Step 14.

- Expected Outcome

  Pass verdict

  In Step 9, the IUT does not send an ATT_READ_BY_TYPE_REQ PDU for the Database Hash characteristic until after Step 10, where the IUT receives the response to the pending ATT Read Request on Bearer 2.

  In Step 12, the IUT sends an ATT_READ_BY_TYPE_REQ PDU for the Database Hash characteristic.

4.13 Unsupported Requests and Commands

GATT/SR/UNS/BI-01-C [Unsupported ATT Requests on Server]

- Test Purpose

  Verify that a Generic Attribute Profile server responds to ATT Requests with an unsupported opcode with a proper ATT Error Response.

- Reference

  [5] 3.3

- Initial Condition
  - The ATT Requests supported by the IUT can be derived from the ICS [3] [7].
  - The preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
- Test Procedure

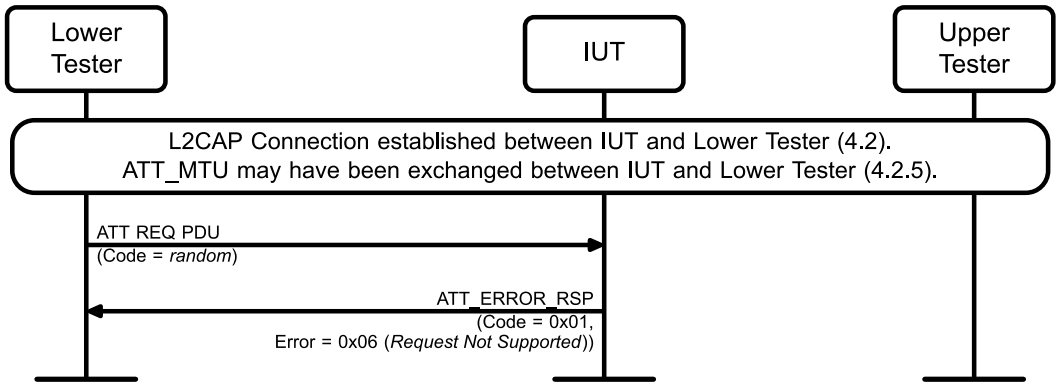


Figure 4.95: GATT/SR/UNS/BI-01-C [Unsupported ATT Requests on Server] MSC

1. The Lower Tester sends an Attribute PDU with the Attribute Opcode field set to a randomly generated request opcode, with the Command Flag set to 0, that is not in the list of ATT Requests supported by the IUT (if the IUT supports all the request opcodes defined by the specification, then the generated opcode will be an RFU value).

   If the value of the Authentication Signature Flag is 1, then the Authentication Signature field of the Attribute PDU is set to a random 12-octet value.

   The Attribute Parameters field of the Attribute PDU is set to an array of random octets, of size limited by the ATT_MTU and the authentication signature.
2. The IUT responds with an ATT Error Response PDU.

- Expected Outcome

  Pass verdict

  In Step 2, the IUT responds with an ATT Error Response PDU, with the Request Opcode In Error field set to the opcode sent by the Lower Tester, the Attribute Handle In Error field set to 0x0000, and the Error Code field set to 0x06 (Request Not Supported).

4.13.1.1 Unsupported ATT Commands on Server

- Test Purpose

  Verify that a Generic Attribute Profile server silently ignores ATT Commands with an unsupported opcode.

- Reference

  [5] 3.3

- Initial Condition
  - The ATT Commands supported by the IUT can be derived from the ICS [3] [7].
  - The preamble procedure defined in Section 4.2.1 is used to set up the transport and L2CAP channel.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.
- Test Case Configuration

Test Case	PDU
GATT/SR/UNS/BI-02-C [Unsupported ATT Commands on Server, Core v6.2 or earlier]	N/A
GATT/SR/UNS/BI-03-C [Unsupported ATT Commands on Server, Core v6.3 or later]	ATT_SIGNED_WRITE_CMD replaced with either ATT_WRITE_CMD or with RFU

Table 4.46: Unsupported ATT Commands on Server test cases

- Test Procedure

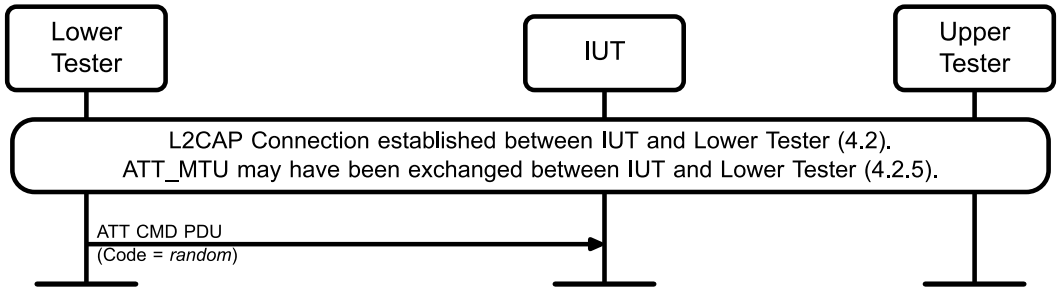


Figure 4.96: Unsupported ATT Commands on Server MSC

1. The Lower Tester sends an Attribute PDU with the Attribute Opcode field set to a randomly generated request opcode, with the Command Flag set to 1, that is not in the list of ATT Commands supported by the IUT (if the IUT supports all the command opcodes defined by the specification, then the generated opcode will be an RFU value). If a PDU is specified in Table 4.46 and is selected, then it is replaced with the specified PDU or with RFU.

   If the value of the Authentication Signature Flag is 1, then the Authentication Signature field of the Attribute PDU is set to a random 12-octet value.

   The Attribute Parameters field of the Attribute PDU is set to an array of random octets, of size limited by the ATT_MTU and the authentication signature.
2. The IUT silently ignores the command from the Lower Tester.

- Expected Outcome

  Pass verdict

  The IUT silently ignores the command from the Lower Tester.

4.14 Security Error

4.14.1 ATT PDU – MIC length too short – from Server

- Test Purpose

  Verify that a Generic Attribute Profile server can detect and reject an ATT PDU when the ACL connection has a MIC length that is too short.

- Initial Condition

  - A preamble procedure defined in Section 4.2.1.2 is used to set up an encrypted transport with a MIC length that is too short and an L2CAP channel.
  - The Upper Tester has access to the IUT server database structure.
  - A preamble procedure defined in Section 4.2.5 may have been used to exchange ATT MTU between the IUT and the Lower Tester.

- Test Case Configuration

Test Case	ATT PDU
GATT/SR/GAD/BI-01-C [ATT PDU – MIC length too short – from Server, ATT_READ_BY_TYPE_REQ] [16] 3.2.5, 3.4.4.1	ATT_READ_BY_TYPE_REQ
GATT/SR/GAR/BI-46-C [ATT PDU – MIC length too short – from Server, ATT_READ_REQ] [16] 3.4.4.3	ATT_READ_REQ
GATT/SR/GAR/BI-47-C [ATT PDU – MIC length too short – from Server, ATT_READ_BLOB_REQ] [16] 3.4.4.5	ATT_READ_BLOB_REQ
GATT/SR/GAR/BI-48-C [ATT PDU – MIC length too short – from Server, ATT_READ_MULTIPLE_REQ] [16] 3.4.4.7	ATT_READ_MULTIPLE_REQ
GATT/SR/GAR/BI-49-C [ATT PDU – MIC length too short – from Server, ATT_READ_MULTIPLE_VARIABLE_REQ] [16] 3.4.4.11	ATT_READ_MULTIPLE_VARIABLE_REQ
GATT/SR/GAW/BI-42-C [ATT PDU – MIC length too short – from Server, ATT_WRITE_REQ] [16] 3.4.5.1	ATT_WRITE_REQ
GATT/SR/GAW/BI-43-C [ATT PDU – MIC length too short – from Server, ATT_PREPARE_WRITE_REQ] [16] 3.4.6.1	ATT_PREPARE_WRITE_REQ
GATT/SR/GAR/BI-50-C [ATT PDU – MIC length too short – from Server, ATT_READ_BY_GROUP_TYPE_REQ] [16] 3.4.4.9	ATT_READ_BY_GROUP_TYPE_REQ

Table 4.47: ATT PDU – MIC length too short – from Server test cases

- Test Procedure

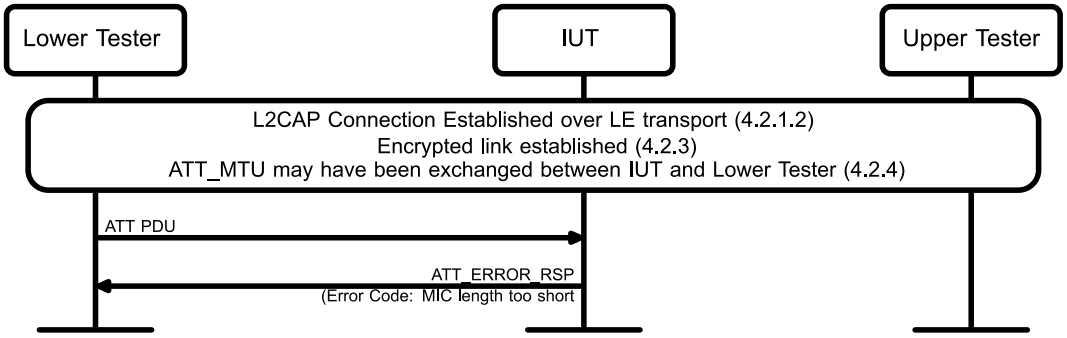


Figure 4.97: ATT PDU – MIC length too short – from Server MSC

1. The Lower Tester sends the ATT PDU specified in Table 4.47 to the IUT.
2. The IUT sends an ATT_ERROR_RSP PDU to the Lower Tester with Error Code set to MIC Length Too Short (0x14).

- Expected Outcome

  Pass verdict

  In Step 2, the IUT sends a MIC Length Too Short (0x14) error code.

5 Test case mapping

The Test Case Mapping Table (TCMT) maps test cases to specific requirements in the ICS. The IUT is tested in all roles for which support is declared in the ICS document.

The columns for the TCMT are defined as follows:

Item: Contains a logical expression based on specific entries from the associated ICS document. Contains a logical expression (using the operators AND, OR, NOT as needed) based on specific entries from the applicable ICS document(s). The entries are in the form of y/x references, where y corresponds to the table number and x corresponds to the feature number as defined in the ICS document for GATT [3].

If a test case is mandatory within the respective layer, then the y/x reference is omitted.

Feature: A brief, informal description of the feature being tested.

Test Case(s): The applicable test case identifiers are required for Bluetooth Qualification if the corresponding y/x references defined in the Item column are supported. Further details about the function of the TCMT are elaborated in [2].

For the purpose and structure of the ICS/IXIT, refer to [2].

Item	Feature	Test Case(s)
GATT 1/2	Generic Attribute Profile Server - Unsupported Requests and Commands	GATT/SR/UNS/BI-01-C
GATT 1/2 AND CORE 2b/62	Generic Attribute Profile Server - Unsupported Requests and Commands, Core v6.2 or earlier	GATT/SR/UNS/BI-02-C
GATT 1/2 AND CORE 2a/63	Generic Attribute Profile Server - Unsupported Requests and Commands, Core v6.3 or later	GATT/SR/UNS/BI-03-C
GATT 3/1 AND GATT 2/2	Exchange MTU	GATT/CL/GAC/BV-01-C
GATT 4/1 AND GATT 2/2	Exchange MTU	GATT/SR/GAC/BV-01-C
GATT 4/1 AND GATT 2/3a	Exchange MTU – EATT bearer over LE	GATT/SR/GAC/BI-01-C
GATT 4/1 AND GATT 1a/4	Exchange MTU – ATT bearer over BR/EDR	GATT/SR/GAC/BI-02-C
GATT 4/1 AND GATT 1a/4 AND GATT 2/3b	Exchange MTU – EATT bearer over BR/EDR	GATT/SR/GAC/BI-03-C
GATT 3/2	Discover All Primary Services	GATT/CL/GAD/BV-01-C
GATT 4/2	Discover All Primary Services	GATT/SR/GAD/BV-01-C
GATT 10/14	Read by Group Type Request	GATT/SR/GAR/BI-50-C
GATT 3/3	Discover Services by Service UUID	GATT/CL/GAD/BV-02-C
GATT 4/3	Discover Services by Service UUID	GATT/SR/GAD/BV-02-C
GATT 3/4	Find Included Services	GATT/CL/GAD/BV-03-C
GATT 4/4	Find Included Services	GATT/SR/GAD/BV-03-C GATT/SR/GAD/BI-01-C
GATT 3/5	Discover All Characteristics of a Service	GATT/CL/GAD/BV-04-C

Item	Feature	Test Case(s)
GATT 4/5	Discover All Characteristics of a Service	GATT/SR/GAD/BV-04-C
GATT 3/6	Discover Characteristics by UUID	GATT/CL/GAD/BV-05-C
GATT 4/6	Discover Characteristics by UUID	GATT/SR/GAD/BV-05-C
GATT 3/7	Discover All Characteristic Descriptors	GATT/CL/GAD/BV-06-C
GATT 4/7	Discover All Characteristic Descriptors	GATT/SR/GAD/BV-06-C
GATT 6/2 AND GATT 1/1	Discover GATT Services over BR/EDR using SDP	GATT/CL/GAD/BV-07-C GATT/CL/GAD/BV-08-C
GATT 6/3 AND GATT 1/2	Publish SDP record for GATT Services over BR/EDR	GATT/SR/GAD/BV-07-C GATT/SR/GAD/BV-08-C
GATT 3/8	Read Characteristic Value	GATT/CL/GAR/BV-01-C GATT/CL/GAR/BI-01-C GATT/CL/GAR/BI-02-C GATT/CL/GAT/BV-01-C
GATT 3/8 AND GATT 7/7	Read Characteristic Value and Insufficient Authorization	GATT/CL/GAR/BI-03-C
GATT 3/8 AND GATT 7/4	Read Characteristic Value and Insufficient Authentication	GATT/CL/GAR/BI-04-C
GATT 3/8 AND GATT 7/2	Read Characteristic Value and Insufficient Encryption Key Size	GATT/CL/GAR/BI-05-C
GATT 4/8	Read Characteristic Value	GATT/SR/GAR/BV-01-C GATT/SR/GAR/BI-01-C GATT/SR/GAR/BI-02-C GATT/SR/GAR/BI-45-C
GATT 4/8 OR GATT 4/19	Read Characteristic Value, Descriptor	GATT/SR/GAR/BI-46-C
GATT 4/8 AND GATT 7/7	Read Characteristic Value and Insufficient Authorization	GATT/SR/GAR/BI-03-C
GATT 4/8 AND GATT 7/4	Read Characteristic Value and Insufficient Authentication	GATT/SR/GAR/BI-04-C
GATT 4/8 AND GATT 7/2	Read Characteristic Value and Insufficient Encryption Key Size	GATT/SR/GAR/BI-05-C
GATT 3/9	Read using Characteristic UUID	GATT/CL/GAR/BV-03-C GATT/CL/GAR/BI-06-C GATT/CL/GAR/BI-07-C
GATT 3/9 AND GATT 7/7	Read using Characteristic UUID and Insufficient Authorization	GATT/CL/GAR/BI-09-C
GATT 3/9 AND GATT 7/4	Read using Characteristic UUID and Insufficient Authentication	GATT/CL/GAR/BI-10-C
GATT 3/9 AND GATT 7/2	Read using Characteristic UUID and Insufficient Encryption Key Size	GATT/CL/GAR/BI-11-C
GATT 4/9	Read using Characteristic UUID	GATT/SR/GAR/BV-03-C GATT/SR/GAR/BI-06-C GATT/SR/GAR/BI-07-C GATT/SR/GAR/BI-08-C
GATT 4/9 AND GATT 7/7	Read using Characteristic UUID and Insufficient Authorization	GATT/SR/GAR/BI-09-C

Item	Feature	Test Case(s)
GATT 4/9 AND GATT 7/4	Read using Characteristic UUID and Insufficient Authentication	GATT/SR/GAR/BI-10-C
GATT 4/9 AND GATT 7/2	Read using Characteristic UUID and Insufficient Encryption Key Size	GATT/SR/GAR/BI-11-C
GATT 3/10	Read Long Characteristic Value	GATT/CL/GAR/BV-04-C GATT/CL/GAR/BI-12-C GATT/CL/GAR/BI-13-C GATT/CL/GAR/BI-14-C
GATT 3/10 AND GATT 7/7	Read Long Characteristic Value and Insufficient Authorization	GATT/CL/GAR/BI-15-C
GATT 3/10 AND GATT 7/4	Read Long Characteristic Value and Insufficient Authentication	GATT/CL/GAR/BI-16-C
GATT 3/10 AND GATT 7/2	Read Long Characteristic Value and Insufficient Encryption Key Size	GATT/CL/GAR/BI-17-C
GATT 4/10	Read Long Characteristic Value	GATT/SR/GAR/BV-04-C GATT/SR/GAR/BI-12-C GATT/SR/GAR/BI-13-C GATT/SR/GAR/BI-14-C
GATT 4/10 OR GATT 4/20	Read Long Characteristic Value, Descriptor	GATT/SR/GAR/BI-47-C
GATT 4/10 AND GATT 7/7	Read Long Characteristic Value and Insufficient Authorization	GATT/SR/GAR/BI-15-C
GATT 4/10 AND GATT 7/4	Read Long Characteristic Value and Insufficient Authentication	GATT/SR/GAR/BI-16-C
GATT 4/10 AND GATT 7/2	Read Long Characteristic Value and Insufficient Encryption Key Size	GATT/SR/GAR/BI-17-C
GATT 3/11	Read Multiple Characteristic Values	GATT/CL/GAR/BV-05-C GATT/CL/GAR/BI-18-C GATT/CL/GAR/BI-19-C
GATT 3/11 AND GATT 7/7	Read Multiple Characteristic Values and Insufficient Authorization	GATT/CL/GAR/BI-20-C
GATT 3/11 AND GATT 7/4	Read Multiple Characteristic Values and Insufficient Authentication	GATT/CL/GAR/BI-21-C
GATT 3/11 AND GATT 7/2	Read Multiple Characteristic Values and Insufficient Encryption Key Size	GATT/CL/GAR/BI-22-C
GATT 4/11	Read Multiple Characteristic Values	GATT/SR/GAR/BV-05-C GATT/SR/GAR/BI-18-C GATT/SR/GAR/BI-19-C GATT/SR/GAR/BI-48-C
GATT 4/11 AND GATT 7/7	Read Multiple Characteristic Values and Insufficient Authorization	GATT/SR/GAR/BI-20-C
GATT 4/11 AND GATT 7/4	Read Multiple Characteristic Values and Insufficient Authentication	GATT/SR/GAR/BI-21-C
GATT 4/11 AND GATT 7/2	Read Multiple Characteristic Values and Insufficient Encryption Key Size	GATT/SR/GAR/BI-22-C
GATT 3/12	Write without Response	GATT/CL/GAW/BV-01-C

Item	Feature	Test Case(s)
GATT 4/12	Write without Response	GATT/SR/GAW/BV-01-C GATT/SR/GAW/BI-39-C
GATT 3/13 AND GATT 2/2	Signed Write Without Response	GATT/CL/GAW/BV-02-C
GATT 4/13	Signed Write Without Response	GATT/SR/GAW/BV-02-C GATT/SR/GAW/BI-01-C GATT/SR/GAW/BI-40-C
GATT 4/16 AND GATT 4/25	Characteristic Value Reliable Writes, Execute Write Request with no pending prepared write values	GATT/SR/GAW/BV-11-C
GATT 3/14	Write Characteristic Value	GATT/CL/GAW/BV-03-C GATT/CL/GAW/BI-02-C GATT/CL/GAW/BI-03-C GATT/CL/GAT/BV-02-C
GATT 3/14 AND GATT 7/7	Write Characteristic Value and Insufficient Authorization	GATT/CL/GAW/BI-04-C
GATT 3/14 AND GATT 7/4	Write Characteristic Value and Insufficient Authentication	GATT/CL/GAW/BI-05-C
GATT 3/14 AND GATT 7/2	Write Characteristic Value and Insufficient Encryption Key Size	GATT/CL/GAW/BI-06-C
GATT 4/14	Write Characteristic Value	GATT/SR/GAW/BV-03-C GATT/SR/GAW/BI-02-C GATT/SR/GAW/BI-03-C GATT/SR/GAW/BI-32-C
GATT 4/14 OR GATT 4/21	Write Characteristic Value	GATT/SR/GAW/BI-42-C
GATT 4/14 AND GATT 7/7	Write Characteristic Value and Insufficient Authorization	GATT/SR/GAW/BI-04-C
GATT 4/14 AND GATT 7/4	Write Characteristic Value and Insufficient Authentication	GATT/SR/GAW/BI-05-C
GATT 4/14 AND GATT 7/2	Write Characteristic Value and Insufficient Encryption Key Size	GATT/SR/GAW/BI-06-C
GATT 3/15	Write Long Characteristic Value	GATT/CL/GAW/BV-05-C GATT/CL/GAW/BI-07-C GATT/CL/GAW/BI-08-C GATT/CL/GAW/BI-09-C
GATT 3/15 AND GATT 7/7	Write Long Characteristic Value and Insufficient Authorization	GATT/CL/GAW/BI-11-C
GATT 3/15 AND GATT 7/4	Write Long Characteristic Value and Insufficient Authentication	GATT/CL/GAW/BI-12-C
GATT 3/15 AND GATT 7/2	Write Long Characteristic Value and Insufficient Encryption Key Size	GATT/CL/GAW/BI-13-C
GATT 4/15	Write Long Characteristic Value	GATT/SR/GAW/BV-05-C GATT/SR/GAW/BI-07-C GATT/SR/GAW/BI-08-C GATT/SR/GAW/BI-09-C GATT/SR/GAW/BI-33-C

Item	Feature	Test Case(s)
GATT 4/15 OR GATT 4/16 OR GATT 4/22	Write Long Characteristic Value, Descriptor	GATT/SR/GAW/BI-43-C
GATT 4/15 AND (GATT 8/6 OR GATT 8/7 OR GATT 8/8)	Multiple Prepare Writes over multiple bearers	GATT/SR/GAW/BV-12-C GATT/SR/GAW/BV-13-C GATT/SR/GAW/BV-14-C
GATT 4/15 AND GATT 7/7	Write Long Characteristic Value and Insufficient Authorization	GATT/SR/GAW/BI-11-C
GATT 4/15 AND GATT 7/4	Write Long Characteristic Value and Insufficient Authentication	GATT/SR/GAW/BI-12-C
GATT 4/15 AND GATT 7/2	Write Long Characteristic Value and Insufficient Encryption Key Size	GATT/SR/GAW/BI-13-C
GATT 4/13 AND GATT 1a/4	Signed Write Without Response – ATT bearer over BR/EDR	GATT/SR/GAW/BI-36-C
GATT 4/13 AND GATT 1a/4 AND GATT 2/3b	Signed Write Without Response – EATT bearer over BR/EDR	GATT/SR/GAW/BI-37-C
GATT 4/13 AND GATT 1a/3 AND GATT 2/3a	Signed Write Without Response – EATT bearer over LE	GATT/SR/GAW/BI-38-C
GATT 3/16	Characteristic Value Reliable Writes	GATT/CL/GAW/BV-06-C GATT/CL/GAW/BI-32-C
GATT 4/16	Characteristic Value Reliable Writes	GATT/SR/GAW/BV-06-C GATT/SR/GAW/BV-07-C GATT/SR/GAW/BV-10-C
GATT 3/17	Notifications	GATT/CL/GAN/BV-01-C
GATT 4/17	Notifications	GATT/SR/GAN/BV-01-C
GATT 4/17 AND ((GATT 1a/4 AND GAP 1/7) OR (GATT 1a/3 AND GAP 24/2) OR (GATT 1a/3 AND GAP 34/2))	Notifications with bonding	GATT/SR/GAN/BV-03-C
GATT 3/18	Indications	GATT/CL/GAI/BV-01-C GATT/CL/GAI/BI-01-C
GATT 4/18	Indications	GATT/SR/GAI/BV-01-C GATT/SR/GAT/BV-01-C
GATT 4/18 AND ((GATT 1a/4 AND GAP 1/7) OR (GATT 1a/3 AND GAP 24/2) OR (GATT 1a/3 AND GAP 34/2))	Indications with bonding	GATT/SR/GAI/BV-02-C

Item	Feature	Test Case(s)
GATT 3/29	Read Multiple Variable Length Characteristic Values	GATT/CL/GAR/BV-08-C GATT/CL/GAR/BI-36-C GATT/CL/GAR/BI-38-C GATT/CL/GAT/BV-03-C
GATT 3/29 AND (GATT 8/2 OR GATT 8/3 OR GATT 8/4 OR GATT 8/5)	Read Multiple Variable Length Characteristic Values – Unenhanced + EATT	GATT/CL/GAR/BV-10-C
GATT 3/29 AND (GATT 8/6 OR GATT 8/7 OR GATT 8/8)	Read Multiple Variable Length Characteristic Values – EATT	GATT/CL/GAR/BV-11-C
GATT 3/29 AND GATT 7/7	Read Multiple Variable Length Characteristic Values and Insufficient Authorization	GATT/CL/GAR/BI-40-C
GATT 3/29 AND GATT 7/4	Read Multiple Variable Length Characteristic Values and Insufficient Authentication	GATT/CL/GAR/BI-42-C
GATT 3/29 AND GATT 7/2	Read Multiple Variable Length Characteristic Values and Insufficient Encryption Key Size	GATT/CL/GAR/BI-44-C
GATT 4/30	Read Multiple Variable Length Characteristic Values	GATT/SR/GAR/BV-09-C GATT/SR/GAR/BI-36-C GATT/SR/GAR/BI-38-C GATT/SR/GAR/BI-49-C
GATT 4/30 AND (GATT 8/2 OR GATT 8/3 OR GATT 8/4 OR GATT 8/5)	Read Multiple Variable Length Characteristic Values – Unenhanced + EATT	GATT/SR/GAR/BV-11-C
GATT 4/30 AND (GATT 8/6 OR GATT 8/7 OR GATT 8/8)	Read Multiple Variable Length Characteristic Values – EATT	GATT/SR/GAR/BV-12-C
GATT 4/30 AND GATT 7/7	Read Multiple Variable Length Characteristic Values and Insufficient Authorization	GATT/SR/GAR/BI-40-C
GATT 4/30 AND GATT 7/4	Read Multiple Variable Length Characteristic Values and Insufficient Authentication	GATT/SR/GAR/BI-42-C
GATT 4/30 AND GATT 7/2	Read Multiple Variable Length Characteristic Values and Insufficient Encryption Key Size	GATT/SR/GAR/BI-44-C
GATT 3/30	Multiple Variable Length Notifications	GATT/CL/GAN/BV-02-C
GATT 4/31	Multiple Variable Length Notifications	GATT/SR/GAN/BV-02-C
GATT 3/19	Read Characteristic Descriptor	GATT/CL/GAR/BV-06-C
GATT 4/19	Read Characteristic Descriptor	GATT/SR/GAR/BV-06-C
GATT 3/21	Write Characteristic Descriptor	GATT/CL/GAW/BV-08-C
GATT 4/21	Write Characteristic Descriptor	GATT/SR/GAW/BV-08-C
GATT 3/20	Read Long Characteristic Descriptors	GATT/CL/GAR/BV-07-C
GATT 3/8 AND GATT 2/1	Read Characteristic Value and Invalid transport access over BR/EDR	GATT/CL/GAR/BI-34-C

Item	Feature	Test Case(s)
GATT 3/8 AND GATT 2/2	Read Characteristic Value and Invalid transport access over LE	GATT/CL/GAR/BI-35-C
GATT 4/20	Read Long Characteristic Descriptors	GATT/SR/GAR/BV-07-C GATT/SR/GAR/BV-08-C
GATT 4/8 AND GATT 2/1 AND GATT 2/2	Read Characteristic Value and Invalid transport access over supported transport	GATT/SR/GAR/BI-34-C GATT/SR/GAR/BI-35-C
GATT 3/22	Write Long Characteristic Descriptors	GATT/CL/GAW/BV-09-C
GATT 4/22	Write Long Characteristic Descriptors	GATT/SR/GAW/BV-09-C
GATT 3/23	Service Changed	GATT/CL/GAS/BV-01-C
GATT 4/23	Service Changed	GATT/SR/GAS/BV-01-C
GATT 3/26	Database Hash Characteristic	GATT/CL/GAS/BV-02-C
GATT 4/27 AND GATT 10/13	Database Hash Characteristic	GATT/SR/GAS/BV-02-C
GATT 4/23 AND GATT 4/26 AND GATT 4/27 AND GATT 10/13	Database Hash Characteristic	GATT/SR/GAS/BV-05-C GATT/SR/GAS/BV-06-C
GATT 4/26 AND (GAP 24/2 OR GAP 24/3 OR GAP 34/2 OR GAP 34/3)	Database Hash Characteristic Bonding	GATT/SR/GAS/BV-04-C
GATT 4/23 AND GATT 4/26 AND GATT 4/27 AND (GAP 24/2 OR GAP 24/3 OR GAP 34/2 OR GAP 34/3)	Database Hash Characteristic Bonding	GATT/SR/GAS/BV-07-C
GATT 4/23 AND GATT 4/26 AND GATT 4/27 AND GATT 4/30 AND GATT 10/13	Database Hash Characteristic	GATT/SR/GAS/BV-08-C
GATT 3/25 AND GATT 3/25a AND GATT 3/26	Enabling the Robust Caching	GATT/CL/GAS/BV-03-C
GATT 4/15 AND GATT 10/13 AND CORE 2a/61	Write Long Characteristic Value – Database out of Sync	GATT/SR/GAW/BI-41-C
GATT 4/26	Client Supported Features Characteristic	GATT/SR/GAS/BV-03-C
GATT 3/28	Characteristic Aggregate Format Descriptor	GATT/CL/GPA/BV-11-C
GATT 4/29	Characteristic Aggregate Format Descriptor	GATT/SR/GPA/BV-11-C
GATT 3/27	Characteristic Format Descriptor by Client	GATT/CL/GPA/BV-12-C
GATT 4/28	Characteristic Format Descriptor by Server	GATT/SR/GPA/BV-12-C

Item	Feature	Test Case(s)
GATT 8/1 AND GATT 1a/3 AND GATT 1a/4 AND CORE 2a/52	Support for multiple simultaneous active ATT bearers from the same device – ATT over BR/EDR and ATT over LE, v5.2 or later	GATT/SR/GPM/BV-01-C
GATT 8/1 AND GATT 1a/3 AND GATT 1a/4 AND CORE 2b/51	Support for multiple simultaneous active ATT bearers from the same device – ATT over BR/EDR and ATT over LE, v5.1 or earlier	GATT/SR/GPM/BV-13-C
GATT 1a/4 AND GATT 8/3	Support for multiple simultaneous active ATT bearers from same device – ATT over BR/EDR and EATT over BR/EDR	GATT/SR/GPM/BV-02-C
GATT 8/5 AND GATT 1a/3 AND GATT 1a/4	Support for multiple simultaneous active ATT bearers from same device – ATT over BR/EDR and EATT over LE	GATT/SR/GPM/BV-03-C
GATT 8/4 AND GATT 1a/3 AND GATT 1a/4	Support for multiple simultaneous active ATT bearers from same device – ATT over LE and EATT over BR/EDR	GATT/SR/GPM/BV-04-C
GATT 8/2 AND GATT 1a/3	Support for multiple simultaneous active ATT bearers from same device – ATT over LE and EATT over LE	GATT/SR/GPM/BV-05-C
GATT 8/6 AND GATT 1a/3 AND GATT 1a/4	Support for multiple simultaneous active EATT bearers from same device – EATT over BR/EDR and EATT over LE	GATT/SR/GPM/BV-06-C
GATT 1a/1 AND GATT 1a/2 AND GATT 3/25a AND GATT 3/26 AND GATT 8/1 AND CORE 2a/53	Support for multiple simultaneous active ATT bearers from the same device – ATT over BR/EDR and ATT over LE	GATT/CL/GPM/BV-07-C
GATT 1a/2 AND GATT 3/25a AND GATT 3/26 AND GATT 8/3 AND CORE 2a/53	Support for multiple simultaneous active ATT bearers from the same device – ATT over BR/EDR and EATT over BR/EDR	GATT/CL/GPM/BV-08-C
GATT 1a/1 AND GATT 1a/2 AND GATT 3/25a AND GATT 3/26 AND GATT 8/5 AND CORE 2a/53	Support for multiple simultaneous active ATT bearers from the same device – ATT over BR/EDR and EATT over LE	GATT/CL/GPM/BV-09-C
GATT 1a/1 AND GATT 1a/2 AND GATT 3/25a AND GATT 3/26 AND GATT 8/4 AND CORE 2a/53	Support for multiple simultaneous active ATT bearers from the same device – ATT over LE and EATT over BR/EDR	GATT/CL/GPM/BV-10-C
GATT 1a/1 AND GATT 3/25a AND GATT 3/26 AND GATT 8/2 AND CORE 2a/53	Support for multiple simultaneous active ATT bearers from the same device – ATT over LE and EATT over LE	GATT/CL/GPM/BV-11-C

Item	Feature	Test Case(s)
GATT 1a/1 AND GATT 1a/2 AND GATT 3/25a AND GATT 3/26 AND GATT 8/6 AND CORE 2a/53	Support for multiple simultaneous active EATT bearers from the same device – EATT over BR/EDR and EATT over LE	GATT/CL/GPM/BV-12-C
GATT 3/25 AND (GATT 2/3a OR GATT 2/3b)	Client Supported Features Characteristic	GATT/CL/GAS/BV-04-C
GATT 3/25 AND GATT 3/30	Client Supported Features Characteristic	GATT/CL/GAS/BV-05-C

Table 5.1: Test case mapping

6 Annex: Generic GATT Integrated Tests (GGIT)

This annex defines generic test procedures that integrate various GATT tests that are required to be executed for each supported service and characteristic.

6.1 Identification conventions

In addition to the conventions defined in Section 4.1.1 Test case identification conventions, the following identifiers are introduced in this annex.

Identifier Abbreviation	Group Identifier <class>
CGGIT	Client GGIT test procedures
CHA	Characteristic
CP	Control Point
DES	Descriptor
GGIT	Generic GATT Integrated Tests
ICDW	Invalid Characteristic or Descriptor Write
ICP	Indication Control Point
ISFC	Indication Supported Features Characteristic
NCP	Notification Control Point
SDP	Validate SDP Record
SDPNF	SDP Record Not Found
SER	Service
SGGIT	Server GGIT test procedures

Table 6.1: Identification conventions

6.2 GGIT input tables

The GGIT procedures are executed with an input consisting of a table. The table format whose format differs between the 1) SER-, CHA-, and DES-tests, 2) tests for common Control Point procedures, and 3) tests for the Indication Supported Features characteristic, where the value of the Features characteristic can change over the lifetime of the device.

In Test Suite documents that use the GGIT procedures, it may be a good idea to use the “landscape” page setup to achieve better readability to avoid the page width limitations the regular “portrait” page setup yields.

6.2.1 Input table for SER-, CHA-, and DES-tests

The table lists all the services and characteristics that are being tested, as well as descriptors and parameters. The CCCD and the SCCD are not listed as a descriptor in the table; their presence is inferred from the characteristic properties (the CCCD is present when the characteristic supports indications or notifications, and the SCCD is present when the characteristic supports broadcast). The Type column accepts the following enumeration applicable to service definitions: “Primary Service”, “Secondary Service”, and “Not defined”, as well as an optional attribute applicable to service and characteristic definitions: “Unique”, “None”, “Multiple”. These enumeration items and the optional attribute are used as follows:

- “Primary Service”: if a specification requires that a service be instantiated as a primary service.
- “Secondary Service”: if a specification requires that a service be instantiated as a secondary service. This enumeration item can optionally be followed by the UUID of the related primary service (e.g., in the context of a profile Test Suite, where the profile specification describes the relationship between services). If the UUID of the related primary service is known, the Service Type column can be set as “Secondary Service (Primary_Service_X_UUID)”.
- “Not defined”: if a specification does not mandate how to instantiate the service; for example, the specification recommends that a service be instantiated as a primary service without forbidding the option of instantiating it as a secondary service.
- “Unique”: if a specification requires that there is only one instance of a service or characteristic.
- “None”: if a specification requires that there are no instances of a service or characteristic.
- “Multiple”: if a specification requires that there are multiple instances of a service.

The Properties column accepts a hex number corresponding to the bits set in the Characteristic Properties bit field. Only a single value should be entered. In the case of SGGIT, for characteristics with more than one possible set of properties, there should be a new row added to cover each combination when the IUT is Server. In the case of CGGIT, this column indicates the bits the Lower Tester sets in the Characteristic Properties bit field in its test database, and the value should be set to cover the superset of supported properties for that characteristic to reduce the number of test iterations when the IUT is Client (e.g., the IDS IDD Features characteristic can support 0x02 (Read) and 0x20 (Indicate) properties, and the value in the properties column for the corresponding CGGIT test should be set to 0x22 (Read, Indicate)).

Test Case	Service / Characteristic / Descriptor	Reference	Properties	Value Length (Octets)	Type
TCID	Service_1	[SPEC] *X.Y*	-	-	*Primary Service, Unique, None, Multiple*
TCID	Characteristic_11	[SPEC] *X.Y*	0x*ZZ*	*N,* *Min-Max or Skip*	*- or Unique, None*
TCID	Descriptor_111	[SPEC] *X.Y*	-	*N* or *Min-Max*	-
TCID	Descriptor_112	[SPEC] *X.Y*	-	*N* or *Min-Max*	-
TCID	Characteristic_12	[SPEC] *X.Y*	0x*ZZ*	*N,* *Min-Max or Skip or Skip-Read or Skip-Write*	-
TCID	Descriptor_121	[SPEC] *X.Y*	-	*N* or *Min-Max*	-
…	…	…	…	…	…
TCID	Service_2	[SPEC] *X.Y*	-	-	*Not defined*
TCID	Characteristic_21	[SPEC] *X.Y*	0x*ZZ*	*N,* *Min-Max or Skip or Skip-Read or Skip-Write*	-
…	…	…	…	…	…

Table 6.2: GGIT input table format

The recommended format for the TCID of these tests is:

<spec abbreviation>*/ROLE/***SGGIT***/<func>/BV-XX-C, (for Server Tests), and*

<spec abbreviation>*/ROLE/***CGGIT***/<func>/BV-XX-C, (for Client Tests)*

6.2.1.1 Example usage – Blood Pressure Service TS

[This is an extract showing how the Blood Pressure Service TS can reference the GGIT as an alternative to creating test cases for each service and characteristic related procedures.]

Execute the Generic GATT Integrated Tests **defined in [GATT.TS.REF#] Section 6.3 Server test procedures (SGGIT) using Table 6.3 below as input:**

[REF#] below is the reference to the related specification (in this case Blood Pressure Service) as the BLS.TS defines it.

Test Case	Service / Characteristic / Descriptor	Reference	Properties	Value Length (Octets)	Type
BLS/SEN/SGGIT/SER/BV-01-C [Service GGIT – Blood Pressure]	Blood Pressure Service	[REF#] 2	-	-	Not defined
BLS/SEN/SGGIT/CHA/BV-02-C [Characteristic GGIT – Blood Pressure Measurement]	Blood Pressure Measurement characteristic	[REF#] 3, 3.1	0x20 (Indicate)	Skip	-
BLS/SEN/SGGIT/CHA/BV-03-C [Characteristic GGIT – Intermediate Cuff Pressure]	Intermediate Cuff Pressure characteristic	[REF#] 3, 3.2	0x10 (Notify)	Skip	-
BLS/SEN/SGGIT/CHA/BV-04-C [Characteristic GGIT – Blood Pressure Feature]	Blood Pressure Feature characteristic	[REF#] 3, 3.3	0x02 (Read)	2	-
BLS/SEN/SGGIT/CHA/BV-05-C [Characteristic GGIT – Enhanced Blood Pressure Measurement]	Enhanced Blood Pressure Measurement characteristic	[REF#] 3, 3.4	0x20 (Indicate)	Skip	-
BLS/SEN/SGGIT/CHA/BV-06-C [Characteristic GGIT – Enhanced Intermediate Cuff Pressure]	Enhanced Intermediate Cuff Pressure characteristic	[REF#] 3, 3.5	0x10 (Notify)	Skip	-
BLS/SEN/SGGIT/CHA/BV-07-C [Characteristic GGIT – Record Access Control Point]	Record Access Control Point (RACP) characteristic	[REF#] 3, 3.6	0x28 (Write, Indicate)	Skip	-

Test Case	Service / Characteristic / Descriptor	Reference	Properties	Value Length (Octets)	Type
BLS/SEN/SGGIT/CHA/BV-08-C [Characteristic GGIT – Blood Pressure Record]	Blood Pressure Record characteristic	[REF#] 3, 3.7	0x10 (Notify)	Skip	-
BLS/SEN/SGGIT/CHA/BV-09-C [Characteristic GGIT – Blood Pressure Feature - Indicate]	Blood Pressure Feature characteristic	[REF#] 3, 3.3	0x22 (Read, Indicate)	2	-

Table 6.3: Example input table for GGIT Server tests

6.2.1.2 Example usage – Itinerary Sharing Profile TS

[This is an extract showing how the Itinerary Sharing Profile TS can reference the GGIT as an alternative to creating test cases for each service and characteristic related procedures.]

Execute the Generic GATT Integrated Tests **defined in [GATT.TS.REF#] Section 6.4 Client test procedures (CGGIT) using Table 6.4 below as input**:

[REF#] below is the reference to the related specification (in this case Itinerary Sharing Profile) as the ISP.TS defines it.

Test Case	Service / Characteristic / Descriptor	Reference	Properties	Value Length (Octets)	Type
ISP/CL/CGGIT/SER/BV-01-C [Service GGIT – Itinerary Sharing]	Itinerary Sharing Service	[REF#] 4	-	-	Primary Service
ISP/CL/CGGIT/SER/BV-01-C [Service GGIT – Object Transfer]	Object Transfer Service	[REF#] 4	-	-	Secondary Service (Itinerary Sharing Service)

Table 6.4: Example input table for GGIT Client tests

6.2.2 Input table for common Control Point procedures (CP-, ICP-, and NCP-tests)

The table lists the control point characteristics and parameters that are being tested.

Characteristic: Control Point Characteristic that is the target of the test.

Parameter(s): Values that are passed in the control point Write Request. Consists of Opcode and (if needed) associated operands.

Pass verdict: Values that are matched in the Error Response, or Indication/Notification for a successful test.

Test Case	Characteristic	Reference	Parameter(s)	Pass Verdict
TCID	Characteristic_1	[SPEC] *X.Y*	0xZZ	*N*
TCID	Characteristic_2	[SPEC] *X.Y*	0xZZ	*N*
…	…	…	…	…

Table 6.5: GGIT input table format

The recommended format for the TCID of these tests is:

<spec abbreviation>*/ROLE/*SGGIT/**CP***/BI-XX-C or BV-XX-C, (for Control Point Server Tests that test Error Responses)*

<spec abbreviation>*/ROLE/*SGGIT/**ICP***/BI-XX-C or BV-XX-C, (for Control Point Server Tests that test Indications)*

<spec abbreviation>*/ROLE/*SGGIT/**NCP***/BI-XX-C or BV-XX-C, (for Control Point Server Tests that test Notifications)*

6.2.3 Input table for Indication Supported Features Characteristic procedures (ISFC-tests)

The table lists the Features Characteristics that are being tested.

Characteristic: Features Characteristic that is the target of the test (applicable where the value of the Features Characteristic can change over the lifetime of the device).

Test Case	Characteristic	Reference
TCID	Characteristic_1	[SPEC] *X.Y*
TCID	Characteristic_2	[SPEC] *X.Y*
…	…	…

Table 6.6: GGIT input table format

The recommended format for the TCID of these tests is <spec abbreviation>/*ROLE*/SGGIT/**ISFC**/*BI-XX-C or BV-XX-C*.

6.2.4 Input table for Invalid Characteristic or Descriptor Write (ICDW-tests)

The table lists the Characteristics or Descriptors and parameters that are being tested.

Characteristic or Descriptor: Characteristic or Descriptor that is the target of the test.

Parameter(s): Values that are passed in the Write Request.

Pass verdict: Values that are matched in the Error Response for a successful test.

Test Case	Characteristic / Descriptor	Reference	Parameter	Pass Verdict
TCID	Characteristic_1	[SPEC] *X.Y*	0xZZ	0xVV
TCID	Descriptor_1	[SPEC] *X.Y*	0xZZ	0xVV
…	…	…	…	…

Table 6.7: GGIT input table format

The recommended format for the TCID of these tests is:

<spec abbreviation>/*ROLE*/SGGIT/I**CDW**/*BI-XX-C or BV-XX-C , (for Server Tests)*

6.2.5 Example usages

[This is an extract showing how a TS can reference the GGIT as an alternative to creating test cases for each service and characteristic related procedures.]

Execute the Generic GATT Control Point Tests **defined in [GATT.TS.REF#] Section 6.3 Server test procedures (SGGIT) using** Table 6.8 **below as input:**

[REF#] below is the reference to the related specification as the TS defines it.

Test Case	Control Point Characteristic	Reference	Parameter(s)	Pass Verdict
DTS/SR/SGGIT/CP/BI-01-C [DTCP - Client Characteristic Configuration Descriptor Improperly Configured]	DTCP Characteristic	[REF#] 3.5.3	Opcode = 0x02 (Propose Time Update)	Client Characteristic Configuration Descriptor Improperly Configured (0xFD)
VCS/SR/SGGIT/CP/BI-02-C [Volume Control Point – Op Code Not Supported]	Volume Control Point Characteristic	[REF#] 1.6	Opcode = 0x07 (RFU)	Op Code Not Supported(0x81)

Table 6.8: Example input table for GGIT Control Point tests

Test Case	Characteristic	Reference
BLS/SEN/SGGIT/ISFC/BV-01-C [Characteristic GGIT – Blood Pressure Feature]	Blood Pressure Features Characteristic	[REF#] 3.3

Table 6.9: Example input table for GGIT Indication Supported Features Characteristic tests

6.3 Server test procedures (SGGIT)

If the specification requires bonding to be performed before any of the operations executed in this section, then the Lower Tester initiates bonding with the IUT as a precondition to the applicable tests.

In case of SER-, CHA-, and DES-tests, for each row of the Server GGIT input table:

- If the row defines a service, then the test sequence in Section 6.3.1 SGGIT/SER [Service GGIT] is executed.
- If the row defines a characteristic, then the test sequence in Section 6.3.2 SGGIT/CHA [Characteristic GGIT] is executed.
- If the row defines a characteristic descriptor other than the CCCD or the SCCD, then the test sequence in Section 6.3.3 SGGIT/DES [Descriptor GGIT] is executed.

Note: The GGIT input table may be preceded by additional initial conditions that need to be satisfied prior to executing any test sequence from the table.

Note: The GGIT input table may be followed by additional Pass verdicts, in which case the Lower Tester will cache all the database information collected when executing the test sequence described in this section to verify that the database meets these additional Pass verdicts.

In case of CP-, ICP-, and NCP-tests (Control Point procedures), for each row of the Server GGIT input table:

- If the row defines a control point, then the test sequence in Section 6.3.4 SGGIT/CP [Control Point] is executed.
- If the row defines an indication control point, then the test sequence in Section 6.3.5 SGGIT/ICP [Indication Control Point] is executed.
- If the row defines a notification control point, then the test sequence in Section 6.3.6 SGGIT/NCP [Notification Control Point] is executed.

In case of SDP-tests, for each row of the Server GGIT input table:

- If the row defines a service over the BR/EDR transport, then the test sequences in Section 6.3.7 SGGIT/SDP [Validate SDP Record] are executed.

In case of SDPNF-tests, for each row of the Server GGIT input table:

- If the row defines a service over the BR/EDR transport, then the test sequences in Section 6.3.8 SGGIT/SDPNF [SDP Record Not Found] are executed.

In case of ISFC-tests, for each row of the Server GGIT input table:

- The test sequences in Section 6.3.9 SGGIT/ISFC [Indication Supported Features Characteristic] are executed.

6.3.1 SGGIT/SER [Service GGIT]

Execute all the following tests using the Service UUID from the current row of the input table, or until one of the referenced tests fails. If the “Unique” attribute is indicated and if more than one instance of the service is discovered, fail this procedure. If the “None” attribute is indicated and if one or more instances of the service are discovered, fail this procedure. If the “Multiple” attribute is indicated and if only one instance of the service is discovered, then fail this procedure:

If Service Type is “Primary Service”:

1. Execute GATT/SR/GAD/BV-01-C [Discover All Primary Services – from Server] or GATT/SR/GAD/BV-07-C [Discover Primary Services using SDP – from Server], depending on the transports tested for this Service UUID, to verify that the Service UUID is present in the list of Primary Services retrieved from the IUT. Optionally, the Lower Tester can cache the primary service discovery results to avoid repeating this step for other services.
2. Execute GATT/SR/GAD/BV-02-C [Discover Primary Service by Service UUID – from Server] or GATT/SR/GAD/BV-08-C [Discover Services by UUID using SDP - from Server] with the Service UUID, depending on the transports tested for this Service UUID, to verify that the UUID is discovered in the database of the IUT. Save the service handle range.

If Service Type is “Secondary Service”:

1. Execute GATT/SR/GAD/BV-01-C [Discover All Primary Services – from Server] or GATT/SR/GAD/BV-07-C [Discover Primary Services using SDP – from Server], depending on the transports tested for this Service UUID. Optionally, the Lower Tester can cache the primary service discovery results to avoid repeating this step for other services.
2. Execute GATT/SR/GAD/BV-03-C [Find Included Services – from Server] for each primary service handle range discovered in Step 1 or GATT/SR/GAD/BV-08-C [Discover Services by UUID using SDP - from Server] with the Service UUID, depending on the transports tested for this Service UUID, to verify that the UUID is discovered in the database of the IUT. Save the service handle range.

If Service Type is “Not defined”:

1. Execute GATT/SR/GAD/BV-01-C [Discover All Primary Services – from Server] or GATT/SR/GAD/BV-07-C [Discover Primary Services using SDP – from Server], depending on the transports tested for this Service UUID. Optionally, the Lower Tester can cache the primary service discovery results to avoid repeating this step for other services. If the Service UUID is present in the list of Primary Services retrieved from the IUT, execute Step 2; then, execute Step 3.
2. Execute GATT/SR/GAD/BV-02-C [Discover Primary Service by Service UUID – from Server] or GATT/SR/GAD/BV-08-C [Discover Services by UUID using SDP - from Server] with the Service UUID, depending on the transports tested for this Service UUID, to verify that the UUID is discovered in the database of the IUT. Save the service handle range of each discovered instance.
3. Execute GATT/SR/GAD/BV-03-C [Find Included Services – from Server] for each primary service handle range discovered in Step 1 or GATT/SR/GAD/BV-08-C [Discover Services by UUID using SDP - from Server] with the Service UUID, depending on the transports tested for this Service UUID. Save the service handle range for each discovered service instance.

If the service is not discovered on the IUT, fail this procedure. Otherwise, execute the following step:

1. For each discovered service instance (both primary and secondary), execute GATT/SR/GAD/BV-04-C [Discover All Characteristics of a Service – from Server] with the instance handle range to verify that all the mandatory characteristics are discovered in the service instance.

Note: In the context of a profile specification, the database on the Server is verified by executing SGGIT once for each service (assuming each service Test Suite includes SGGIT). If a profile specification defines a relationship between services on the Server, or number of instances for a service, SGGIT should not be used in the profile Test Suite. A separate test case should exist to cover these requirements.

6.3.2 SGGIT/CHA [Characteristic GGIT]

Execute all the following tests using the Characteristic UUID from the current row of the input table, or until one of the referenced tests fails:

1. Execute GATT/SR/GAD/BV-05-C [Discover Characteristics by UUID – from Server] with the Characteristic UUID to verify that the UUID is discovered in the database of the IUT. Save the characteristic properties and handle range(s) for the next steps. If a single instance of the characteristic is discovered, verify that all characteristic properties listed in the input table are supported; otherwise, verify that each instance of the characteristic supports the mandatory properties, and that all optional properties (if any) declared as supported are present for at least one instance of the characteristic. If this characteristic is a “Unique” Type, and there is more than one instance, then fail this procedure. If this characteristic is a “None” Type, and there are one or more instances, then fail this procedure. Otherwise, execute Steps 2–7 for each instance of the characteristic discovered by the procedure.
2. Execute GATT/SR/GAD/BV-06-C [Discover All Characteristic Descriptors – from Server] with the characteristic handle range to verify that all the characteristic descriptors listed under the Characteristic UUID in the input table are discovered in the database of the IUT. If the characteristic supports Notifications or Indications, then expect the CCCD to be present in the list of descriptors. If the characteristic supports Broadcast, then expect the SCCD to be present in the list of descriptors. Save all handle ranges for the next steps.
3. If the CCCD and/or the SCCD is present in the list of descriptors, then execute GATT/SR/GAR/BV-06-C [Read Characteristic Descriptor – from Server] using the discovered handle of the CCCD and/or, respectively, the SCCD.
4. If the *Value Length (Octets)* column does not specify “Skip” or “Skip-Read” for this characteristic and if the characteristic supports the Read property, then:

    a) Execute GATT/SR/GAR/BV-01-C [Read Characteristic Value - from Server] if the value length allows small reads.
    b) Execute GATT/SR/GAR/BV-03-C [Read Using Characteristic UUID – from Server].
    c) Execute GATT/SR/GAR/BV-04-C [Read Long Characteristic Value – from Server] if the value length allows long reads.
    d) Verify that all Reserved for Future Use (RFU) bits, as defined by the service specification, are set to 0.

5. If the *Value Length (Octets)* column specifies “Skip” or “Skip-Write” for this characteristic, then skip Steps 6–7.
6. If the characteristic supports the Write Without Response property, then execute GATT/SR/GAW/BV-01-C [Write Without Response – to Server].

7. If the characteristic supports the Write property, then:

    a) Execute GATT/SR/GAW/BV-03-C [Write Characteristic Value – to Server] if the value length allows small writes.
    b) Execute GATT/SR/GAW/BV-05-C [Write Long Characteristic Value – to Server] if the value length allows long writes.

Note: If the characteristic supports the following properties: Broadcast, Notify, Indicate, Authenticated Signed Writes (earlier than v6.3), or Extended Properties (such as Reliable Write), a separate test case should exist to cover these requirements.

6.3.3 SGGIT/DES [Descriptor GGIT]

Execute all the following tests using the discovered handle of the Descriptor UUID from the current row of the input table, or until one of the referenced tests fails:

1. Execute GATT/SR/GAR/BV-06-C [Read Characteristic Descriptor – from Server] if the value length allows small reads. Verify that all Reserved for Future Use (RFU) bits, as defined by the service specification, are set to 0.
2. Execute GATT/SR/GAR/BV-07-C [Read Long Characteristic Descriptor – from Server] if the value length allows long reads. Verify that all Reserved for Future Use (RFU) bits, as defined by the service specification, are set to 0.
3. Execute GATT/SR/GAW/BV-08-C [Write Characteristic Descriptor – from Server] if the value length allows small writes.
4. Execute GATT/SR/GAW/BV-09-C [Write Long Characteristic Descriptors – to Server] if the value length allows long writes.

6.3.4 SGGIT/CP [Control Point]

Execute all the following test steps using the Characteristic UUID from the current row of the input table, or until one of the referenced tests fails:

1. Execute GATT/SR/GAD/BV-05-C [Discover Characteristics by UUID – from Server] with the Characteristic UUID to verify that the UUID is discovered in the database of the IUT. Save the characteristic properties and handle range for the next steps.
2. Execute GATT/SR/GAD/BV-06-C [Discover All Characteristic Descriptors – from Server] with the characteristic handle range to verify that all the characteristic descriptors listed under the Characteristic UUID in the input table are discovered in the database of the IUT. If the characteristic supports Notifications or Indications, then expect the CCCD to be present in the list of descriptors. Save all handle ranges for the next steps.
3. The Lower Tester has or acquires the necessary security permissions from the IUT to write to the Control Point characteristic and descriptor.
4. Execute an ATT_WRITE_REQ (Control Point Characteristic) with the fields set to values specified in the Parameter column from the input table.
5. The Lower Tester receives an ATT_ERROR_RSP from the IUT.

    Pass verdict

    Error Code matches the value in the Pass Verdict column.

6.3.5 SGGIT/ICP [Indication Control Point]

Execute all the following test steps using the Characteristic UUID from the current row of the input table, or until one of the referenced tests fails:

1. Execute GATT/SR/GAD/BV-05-C [Discover Characteristics by UUID – from Server] with the Characteristic UUID to verify that the UUID is discovered in the database of the IUT. Save the characteristic properties and handle range for the next steps.
2. Execute GATT/SR/GAD/BV-06-C [Discover All Characteristic Descriptors – from Server] with the characteristic handle range to verify that all the characteristic descriptors listed under the Characteristic UUID in the input table are discovered in the database of the IUT. If the characteristic supports Notifications or Indications, then expect the CCCD to be present in the list of descriptors. Save all handle ranges for the next steps.
3. The Lower Tester has or acquires the necessary security permissions from the IUT to write to the Control Point characteristic and descriptor.
4. Enable Indications of the Control Point characteristic by sending an ATT_WRITE_REQ (Control Point CCCD, 0x0002) from the Lower Tester to the IUT.
5. The Lower Tester receives an ATT_WRITE_RSP from the IUT.
6. Execute an ATT_WRITE_REQ (Control Point Characteristic) with the fields set to values mentioned in the Parameter column from the input table.
7. The Lower Tester receives an ATT_WRITE_RSP from the IUT.
8. The IUT sends an ATT_HANDLE_VALUE_IND of the Control Point Characteristic.
9. The Lower Tester sends an ATT_HANDLE_VALUE_CFM to the IUT.

Pass verdict

The IUT sent an Indication that matches the values in the Pass Verdict column.

6.3.6 SGGIT/NCP [Notification Control Point]

Execute all the following test steps using the Characteristic UUID from the current row of the input table, or until one of the referenced tests fails:

1. Execute GATT/SR/GAD/BV-05-C [Discover Characteristics by UUID – from Server] with the Characteristic UUID to verify that the UUID is discovered in the database of the IUT. Save the characteristic properties and handle range for the next steps.
2. Execute GATT/SR/GAD/BV-06-C [Discover All Characteristic Descriptors – from Server] with the characteristic handle range to verify that all the characteristic descriptors listed under the Characteristic UUID in the input table are discovered in the database of the IUT. If the characteristic supports Notifications or Indications, then expect the CCCD to be present in the list of descriptors. Save all handle ranges for the next steps.
3. The Lower Tester has or acquires the necessary security permissions from the IUT to write to the Control Point characteristic and descriptor.
4. Enable Notification of the Control Point Characteristic by sending an ATT_WRITE_REQ (Control Point CCCD, 0x0001) from the Lower Tester to the IUT.
5. The Lower Tester receives an ATT_WRITE_RSP from the IUT.
6. Execute an ATT_WRITE_REQ (Control Point Characteristic) with the fields set to values mentioned in the Parameter column from the input table.

7. The Lower Tester receives an ATT_WRITE_RSP from the IUT.
8. The IUT sends an ATT_HANDLE_VALUE_NTF of the Control Point Characteristic.

   Pass verdict

   The IUT sent a Notification that matches the values in the Pass Verdict column.

6.3.7 SGGIT/SDP [Validate SDP Record]

Execute all the following test steps using the Service UUID from the current row of the input table, or until one of the test steps fails. If the “Unique” attribute is indicated and if more than one instance of the service is discovered, fail this procedure. If the “None” attribute is indicated and if one or more instances of the service are discovered, fail this procedure. If the “Multiple” attribute is indicated and if only one instance of the service is found, then fail this procedure:

1. A BR/EDR transport connection is set up between the IUT and the Lower Tester.
2. The Lower Tester sends an SDP request to retrieve matching service records on the IUT corresponding to the Service UUID and requests all attributes of those service records by sending an SDP_SERVICE_SEARCH_ATTR_REQ (code=0x06) with a ServiceSearchPattern parameter set to the <Service UUID>, the MaximumAttributeByteCount parameter set to 0xFFFF, the AttributeIDList parameter set to the range 0x0000–0xFFFF (retrieve all attributes), and the ContinuationState parameter set to 0x00.
3. The test will continue until the IUT returns an SDP_SERVICE_SEARCH_ATTR_RSP with a zero continuation state parameter. If the IUT returns an SDP_SERVICE_SEARCH_ATTR_RSP including a non-zero continuation state parameter, the Lower Tester continues to send SDP_SERVICE_SEARCH_ATTR_REQ requests to the IUT, including the returned continuation state parameter, until the IUT returns an SDP_SERVICE_SEARCH_ATTR_RSP with a zero continuation state parameter.

If the service is not discovered on the IUT, fail this procedure. Otherwise, execute the following step:

4. Execute GATT/SR/GAD/BV-08-C [Discover Services by UUID using SDP - from Server] with the Service UUID, and save the service handle range.

   Pass verdict

   The SDP record for the service is discovered.

   All attributes that are mandatory for the service are present in the SDP record.

   The values of all attributes in the SDP record meet the requirements of the service.

6.3.8 SGGIT/SDPNF [SDP Record Not Found]

Execute all the following test steps using the Service UUID from the current row of the input table, or until one of the test steps fails:

1. A BR/EDR transport connection is set up between the IUT and the Lower Tester.
2. The Lower Tester sends an SDP request to retrieve matching service records on the IUT corresponding to the Service UUID and requests all attributes of those service records by sending an SDP_SERVICE_SEARCH_ATTR_REQ (code=0x06) with a ServiceSearchPattern parameter set to the <Service UUID>, the MaximumAttributeByteCount parameter set to a valid value, the AttributeIDList parameter set to the range 0x0000–0x0004, and the ContinuationState parameter set to 0x00.
3. The IUT returns an SDP_SERVICE_SEARCH_ATTR_RSP.

   Pass verdict

   The IUT responds with the requested attribute (NULL) upon reception of the SDP_SERVICE_SEARCH_ATTR_REQ PDU indicating that the Service is not discoverable over the BR/EDR transport.

6.3.9 SGGIT/ISFC [Indication Supported Features Characteristic]

Execute all the following test steps using the Features Characteristic UUID from the current row of the input table, or until one of the referenced tests fails:

1. Execute GATT/SR/GAD/BV-05-C [Discover Characteristics by UUID – from Server] with the Features Characteristic UUID to verify that the UUID is discovered in the database of the IUT. Save the characteristic properties and handle range for the next steps.
2. Execute GATT/SR/GAD/BV-06-C [Discover All Characteristic Descriptors – from Server] with the characteristic handle range to verify that the CCCD is discovered in the database of the IUT.
3. The Lower Tester has or acquires the necessary security permissions from the IUT to write to the Features Characteristic and descriptor.
4. Enable Indications of the Features Characteristic by sending an ATT_WRITE_REQ (Features Characteristic CCCD, 0x0002) from the Lower Tester to the IUT.
5. The Lower Tester receives an ATT_WRITE_RSP from the IUT.
6. If not done already, perform pairing with bonding between the IUT and the Lower Tester, then terminate the connection.
7. The Upper Tester orders the IUT to change the Features Characteristic to a different valid value.
8. Establish a new connection between the IUT and the Lower Tester.
9. The IUT sends an ATT_HANDLE_VALUE_IND of the Features Characteristic, with the value set in Step 7, to the Lower Tester.
10. The Lower Tester sends an ATT_HANDLE_VALUE_CFM to the IUT.

    Pass verdict

    The IUT sends an Indication that matches the values set in Step 7.

6.3.10 SGGIT/ICDW [Invalid Characteristic or Descriptor Write]

Execute all the following test steps using the Characteristic UUID or Descriptor from the current row of the input table, or until one of the referenced tests fails:

1. Execute GATT/SR/GAD/BV-05-C [Discover Characteristics by UUID – from Server] with the Characteristic UUID, to verify that the UUID is found in the database of the IUT. Save the characteristic properties and handle range for the next steps.
2. Execute GATT/SR/GAD/BV-06-C [Discover All Characteristic Descriptors – from Server] with the characteristic handle range to verify that all the characteristic descriptors listed under the Characteristic UUID in the input table are found in the database of the IUT. Save all handle ranges for the next steps.
3. The Lower Tester has or acquires the necessary security permissions from the IUT to write to the characteristic and descriptor.
4. Execute an ATT_WRITE_REQ with the fields set to values mentioned in the Parameter column from the input table.
5. The Lower Tester receives an ATT_ERROR_RSP from the IUT.

   Pass verdict

   The IUT sends an ATT_ERROR_RSP with the code that matches the value in the Pass Verdict column.

6.4 Client test procedures (CGGIT)

If the specification requires bonding to be performed before any of the operations executed in this section, then the Upper Tester triggers the IUT to initiate bonding with the Lower Tester as a precondition to the applicable tests.

For each row of the Client GGIT input table:

- If the row defines a service, then the test sequence in Section 6.4.1 CGGIT/SER [Service GGIT] is executed.
- If the row defines a characteristic, then the test sequence in Section 6.4.2 CGGIT/CHA [Characteristic GGIT] is executed.
- If the row defines a characteristic descriptor other than the CCCD, then the test sequence in Section 6.4.3 CGGIT/DES [Descriptor GGIT] is executed.
- If the row defines a Features Characteristic, where its value can change over the lifetime of the device, then the test sequence in Section 6.4.4 CGGIT/ISFC [Indication Supported Features Characteristic] is also executed.

6.4.1 CGGIT/SER [Service GGIT]

Execute all the following tests using the Service UUID from the current row of the input table, or until one of the referenced tests fails:

If Service Type is “Primary Service”:

1. If the IUT supports the GATT Discover All Primary Services sub-procedure, then execute GATT/CL/GAD/BV-01-C [Discover All Primary Services – by Client] or GATT/CL/GAD/BV-07-C [Discover Primary Services Using SDP – by Client], depending on the transports tested for this Service UUID, to verify that the IUT discovers all the primary services and reports that the Service UUID is present in the list of Primary Services retrieved from the Lower Tester. Optionally, the IUT can cache the primary service discovery results to avoid repeating this step for other services.
2. If the IUT supports the GATT Discover Primary Service by UUID sub-procedure, then execute GATT/CL/GAD/BV-02-C [Discover Primary Service by Service UUID – by Client] or GATT/CL/GAD/BV-08-C [Discover Services by UUID Using SDP – by Client] with the Service UUID, depending on the transports tested for this Service UUID, to verify that the IUT finds the UUID in the database of the Lower Tester and reports the correct handle range.

If Service Type is “Secondary Service”:

1. If the IUT supports the GATT Discover All Primary Services sub-procedure, then execute GATT/CL/GAD/BV-01-C [Discover All Primary Services – by Client] or GATT/CL/GAD/BV-07-C [Discover Primary Services Using SDP – by Client], depending on the transports tested for this Service UUID. Optionally, the IUT can cache the primary service discovery results to avoid repeating this step for other services. If the related primary service UUID is present in the Service Type column, the IUT may execute Step 2 only for the handle range of that primary service if LE transport is tested.
2. If the IUT supports the Find Included Services sub-procedure, then execute GATT/CL/GAD/BV-03-C [Find Included Services – by Client] either using each handle range of the primary services retrieved from the Lower Tester in Step 1 or using the handle range of the related primary service or GATT/CL/GAD/BV-08-C [Discover Services by UUID Using SDP – by Client] with the Service UUID, depending on the transports tested for this Service UUID, to verify that the IUT finds the UUID in the database of the Lower Tester and reports the correct handle range.

If Service Type is “Not defined”:

1. If the IUT supports the GATT Discover All Primary Services sub-procedure, then execute GATT/CL/GAD/BV-01-C [Discover All Primary Services – by Client] or GATT/CL/GAD/BV-07-C [Discover Primary Services Using SDP – by Client], depending on the transports tested for this Service UUID, to verify that the IUT discovers all the primary services. Optionally, the IUT can cache the primary service discovery results to avoid repeating this step for other services. If the IUT reports that the service UUID is discovered in the list of Primary Services retrieved from the Lower Tester, execute Step 2; then, execute Step 3.
2. If the IUT supports the GATT Discover Primary Service by UUID sub-procedure, then execute GATT/CL/GAD/BV-02-C [Discover Primary Service by Service UUID – by Client] or GATT/CL/GAD/BV-08-C [Discover Services by UUID Using SDP – by Client] with the Service UUID, depending on the transports tested for this Service UUID, to verify that the IUT finds the UUID in the database of the Lower Tester and reports the correct handle range for each discovered instance.
3. If the IUT supports the Find Included Services sub-procedure, then execute GATT/CL/GAD/BV-03-C [Find Included Services – by Client] using each handle range of the primary services retrieved from the Lower Tester in Step 1 or GATT/CL/GAD/BV-08-C [Discover Services by UUID Using SDP –

by Client] with the Service UUID, depending on the transports tested for this Service UUID, to verify that the IUT finds the UUID in the database of the Lower Tester and reports the correct handle range for each discovered instance.

Finally, execute the following procedure:

1. For each discovered service instance (both primary and secondary), if the IUT supports the GATT Discover All Characteristics of a Service sub-procedure, then execute GATT/CL/GAD/BV-04-C [Discover All Characteristics of a Service – by Client] with the service handle range to verify that all the mandatory characteristics listed under the Service UUID in the input table are discovered by the IUT in the database of the Lower Tester. In addition to the characteristics listed under the Service UUID, the service instantiation contains two «future» characteristics. The «future» characteristics are randomly inserted between the characteristics listed under the Service UUID. The «future» characteristic is a 16-bit UUID randomly selected from unassigned UUIDs at the time of the test.

6.4.2 CGGIT/CHA [Characteristic GGIT]

Execute all the following tests using the Characteristic UUID from the current row of the input table, or until one of the referenced tests fails:

1. If the IUT supports the GATT Discover Characteristics by UUID sub-procedure, then execute GATT/CL/GAD/BV-05-C [Discover Characteristics by UUID – by Client] with the Characteristic UUID to verify that the IUT finds the UUID in the database of the IUT and reports the correct characteristic properties and handle range as follows: if a single instance of the characteristic is reported, all characteristic properties defined in the input table are reported; otherwise, each characteristic instance is reported to support all mandatory properties, and each optional property is discovered for at least one instance of the characteristic. Execute Steps 2–6 for each discovered instance of the characteristic.
2. If the IUT supports the GATT Discover All Characteristic Descriptors sub-procedure, then execute GATT/CL/GAD/BV-06-C [Discover All Characteristic Descriptors – by Client] with the characteristic handle range to verify that all the characteristic descriptors listed under the Characteristic UUID in the input table are discovered by the IUT in the database of the Lower Tester and that the correct handle ranges are reported.
3. If the *Value Length (Octets)* column does not specify “Skip” or “Skip-Read” for this characteristic and if the characteristic supports the Read property, then:
    a) if the IUT supports the GATT Read Characteristic Value sub-procedure, then execute GATT/CL/GAR/BV-01-C [Read Characteristic Value – by Client] if the value length allows small reads.
    b) if the IUT supports the GATT Read Using Characteristic UUID sub-procedure, then execute GATT/CL/GAR/BV-03-C [Read Using Characteristic UUID – by Client].
    c) if the IUT supports the GATT Read Long Characteristic Value sub-procedure, then execute GATT/CL/GAR/BV-04-C [Read Long Characteristic Value – by Client] if the value length allows long reads.
4. If the *Value Length (Octets)* column specifies “Skip” or “Skip-Write” for this characteristic, then skip Steps 5–6.
5. If the characteristic supports the Write Without Response property and if the IUT supports the GATT Write Without Response sub-procedure, then execute GATT/CL/GAW/BV-01-C [Write without Response – by Client].

6. If the characteristic supports the Write property, then:
    a) If the IUT supports the GATT Write Characteristic Value sub-procedure, then execute GATT/CL/GAW/BV-03-C [Write Characteristic Value - by Client] if the value length allows small writes.
    b) If the IUT supports the GATT Write Long Characteristic Value sub-procedure, then execute GATT/CL/GAW/BV-05-C [Write Long Characteristic Value – by Client] if the value length allows long writes.
    c) Verify that all Reserved for Future Use (RFU) bits, as defined by the service specification, are set to 0.

Note: If the characteristic supports the following properties: Broadcast, Notify, Indicate, Authenticated Signed Writes (earlier than v6.3), or Extended Properties (such as Reliable Write), a separate test case should exist to cover these requirements.

6.4.3 CGGIT/DES [Descriptor GGIT]

Execute all the following tests using the discovered handle of the Descriptor UUID from the current row of the input table, or until one of the referenced tests fails:

1. If the IUT supports the GATT Read Characteristic Descriptor sub-procedure, then execute GATT/CL/GAR/BV-06-C [Read Characteristic Descriptor – by Client] if the value length allows small reads.
2. If the IUT supports the GATT Read Long Characteristic Descriptors sub-procedure, then execute GATT/CL/GAR/BV-07-C [Read Long Characteristic Descriptor – by Client] if the value length allows long reads.
3. If the IUT supports the GATT Write Characteristic Descriptor sub-procedure, then execute GATT/CL/GAW/BV-08-C [Write Characteristic Descriptor – by Client] if the value length allows small writes.
4. If the IUT supports the GATT Write Long Characteristic Descriptors sub-procedure, then execute GATT/CL/GAW/BV-09-C [Write Long Characteristic Descriptors – by Client] if the value length allows long writes.

6.4.4 CGGIT/ISFC [Indication Supported Features Characteristic]

Execute all the following test steps using the Features Characteristic UUID from the current row of the input table, or until one of the referenced tests fails:

1. If the IUT supports the GATT Discover Characteristics by UUID sub-procedure, then execute GATT/CL/GAD/BV-05-C [Discover Characteristics by UUID – by Client] with the Features Characteristic UUID to verify that the IUT finds the UUID in the database of the Lower Tester and reports the correct characteristic properties and handle range.
2. If the IUT supports the GATT Discover All Characteristic Descriptors sub-procedure, then execute GATT/CL/GAD/BV-06-C [Discover All Characteristic Descriptors – by Client] with the characteristic handle range to verify that all the characteristic descriptors listed under the Features Characteristic UUID in the input table are discovered by the IUT in the database of the Lower Tester and that the correct handle ranges are reported.
3. If the IUT supports the GATT Write Characteristic Descriptor sub-procedure, then execute GATT/CL/GAW/BV-08-C [Write Characteristic Descriptor – by Client] with the Features Characteristic CCCD, to verify that the IUT writes the CCCD in the Lower Tester database.
4. If not done already, perform pairing with bonding between the IUT and the Lower Tester, then terminate the connection.

5. The Lower Tester changes the Features Characteristic value to a different valid value.
6. Establish a new connection between the IUT and the Lower Tester.
7. The Lower Tester sends an ATT_HANDLE_VALUE_IND of the Features Characteristic, with the value set in Step 5, to the IUT, which reports it to the Upper Tester.
8. The IUT sends an ATT_HANDLE_VALUE_CFM to the Lower Tester.

Pass verdict

The IUT sends an ATT_WRITE_REQ (Features Characteristic CCCD, 0x0002) to the Lower Tester, enabling Indication of the Features Characteristic.

The value reported by the IUT in Step 7 matches the value set by the Lower Tester in Step 5.

7 Revision history and acknowledgments

Revision History

Publication Number	Revision Number	Date	Comments
0	4.0.0	2010-06-30	Publication.
	4.0.1r00	2010-08-24	TSE 3427: new text in 4.2.3 TSE 3911: new test TP/GAN/CL/BV-01-C (GATT/CL/GAN/BV-01-C after ID conversion) and TCMT entry for 3/17
	4.0.1r01 – 4.0.1r12	2010-10-10 – 2011-06-13	TSE 3859: edit 4.2.3; add missing references to 4.2.3. TSE 3911: add timer to TP/GAN/CL/BV-01-C TSE 3937: correct opcode for ATT_WRITE_CMD in TP/GAW/xx/BV-01-C, TP and TP/GAW/xx/BV-02-C TSE 4106: 128-bit UUID optional in TP/GAD/CL/BV-01-C (GATT/CL/GAD/BV-01-C after ID conversion), TP/GAR/CL/BV-03-C (GATT/CL/GAR/BV-03-C after ID conversion)and TP/GAD/CL/BV-02-I TSE 4107 & 4122: explicitly state the option to use ATT_READ_REQ as the first operation in Read Long Characteristic tests: TP/GAR/CL/BV-04-C (GATT/CL/GAR/BV-04-C after ID conversion), and TP/GAR/SR/BI-12-C through TP/GAR/SR/BI-17-C (GATT/SR/GAR/BI-12-C through BI-17-C after ID conversion). TSE 4127: remove requirement to use IXIT from TP/GAD/CL/BV-01-C, AND TP/GAD/CL/BV-02-I (GATT/CL/GAD/BV-01-C after ID conversion). TSE 4130: revise Pass Verdict in TP/GAR/SR/BI-18-C (GATT/SR/GAR/BI-18-C after ID conversion). TSE 4132: edit initial condition in TP/GAR/SR/BV-03-C (GATT/SR/GAR/BV-03-C after ID conversion). TSE 4133: correct initial conditions in, TP/GAW/CL/BI-09-C and TP/GAW/CL/BI-27-C (GATT/CL/GAW/BI-09-C and GATT/CL/GAW/BI-27-C after ID conversion). TSE 4134: add ATT_PREPARE_WRITE_RSP and ATT_EXECUTE_WRITE_REQ, in test procedure, MSC and Pass Verdict. TSE 4135: correct test purpose for TP/GAW/CL/BI-13-C (GATT/CL/GAW/BI-13-C after ID conversion). TSE 4107: Redo TP/GAR/CL/BV-04-C (GATT/CL/GAR/BV-04-C after ID conversion), MSC (done), TP/GAR/CL/BI-12-C (GATT/CL/GAR/BI-12-C after ID conversion), TP/GAR/SR/BI-13-C through TP/GAR/SR/BI-17-C (GATT/SR/GAR/BI-13-C through GATT/SR/GAR/BI-13-C after ID conversion) TSE 4122: TP/GAR/CL/BI-28-C through TP/GAR/CL/BI-33-C Pending JDs update (GATT/CL/GAR/BI-28-C through GATT/CL/GAR/BI-33-C after ID conversion)

Publication Number	Revision Number	Date	Comments
			TSE 4123: Update hyperlinks page 16, 26, 37, 43 TSE 4124: TP/GAR/SR/BI-04-C, TP/GAR/SR/BI-10-C, TP/GAR/SR/BI-16-C, TP/GAR/SR/BI-26-C, TP/GAR/SR/BI-32-C, TP/GAW/SR/BI-05-C, TP/GAW/SR/BI-12-C, TP/GAW/SR/BI-18-C, TP/GAW/SR/BI-23-C, TP/GAW/SR/BI-30-C: TCMT (GATT/SR/GAR/BI-04-C, GATT/SR/GAR/BI-32-C, GATT/SR/GAW/BI-05-C, GATT/SR/GAW/BI-12-C, GATT/SR/GAW/BI-18-C, GATT/SR/BI-23-C, and GATT/SR/GAW/BI-31-C after ID conversion) TSE 4130: TP/GAR/SR/BI-18-C: update Pass Verdict (GATT/SR/GAR/BI-18-C after ID conversion) TSE 4132: TP/GAR/SR/BV-03-C: update Test procedure (GATT/SR/GAR/BV-03-C after ID conversion) TSE 4133: TP/GAW/CL/BI-09-C, TP/GAW/CL/BI-27-C: Initial condition (GATT/CL/GAW/BI-09-C, GATT/CL/GAW/BI-27-C after ID conversion) TSE 4134: TP/GAW/CL/BI-09-C, TP/GAW/SR/BI-09-C, TP/GAW/CL/BI-27-C and TP/GAW/SR/BI-27-C: update MSCs (GATT/CL/GAW/BI-09-C, GATT/SR/GAW/BI-09-C, GATT/CL/GAW/BI-27-C, and GATT/SR/GAW/BI-27-C after ID conversion) TSE 4135: TP/GAW/CL/BI-13-C (GATT/CL/GAW/BI-13-C after ID conversion): change authentication to encryption TSE 4152: TP/GAW/SR/BI-01-C, TP/GAW/SR/BV-02-C: update MSCs (GATT/SR/GAW/BI-01-C, GATT/SR/GAW/BV-02-C after ID conversion) TSE 4153: TP/GAW/CL/BV-01-C, TP/GAW/SR/BV-01-C:update MSCs (GATT/CL/GAW/BV-01-C and GATT/SR/GAW/BV-01-C after ID conversion) TSE 4154: TP/GAW/CL/BV-02-C, TP/GAW/SR/BV-02-C: update MSCs (GATT/CL/GAW/BV-02-C and GATT/SR/GAW/BV-02-C after ID conversion) TSE 4156: TP/GAW/CL/BV-05-C, TP/GAW/CL/BV-09-C: correct Pass Verdict (GATT/CL/GAW/BV-05-C and GATT/CL/GAW/BV-09-C after ID conversion) TSE 4160: TP/GAW/CLBI-32;C new test case (GATT/CL/GAW/BI-32-C after ID conversion) TSE 4170: Update references from 4.2.1 and 4.2.1.2 to 3.2.1 and 3.2.1.2 TSE 4172: TP/GAR/SR/BI-19-C through TP/GAR/SR/BI-22-C (GATT/SR/GAR/BI-19-C through GATT/SR/GAR/BI-22-C after ID conversion) TSE 4179: TP/GAW/CL/BI-09-C (GATT/CL/GAW/BI-09-C after ID conversion): edit Test Procedure TSE 4236:Update TCMT for TP/GAS/CL/BV-01-C, TP/GAS/SR/BV-01-C (GATT/CL/GAS/BV-01-C, GATT/SR/GAS/BV-01-C after ID conversion). TSE 4237: Duplicate of TSE 4170

Publication Number	Revision Number	Date	Comments
			Input TSE 4223: TP/GAN/SR/BV-01-C, TP/GAI/CL/BV-01-C (GATT/SR/GAN/BV-01-C, GATT/CL/GAI/BV-01-C after ID conversion): Update Pass Verdicts; TP/GAS/SR/BV-01-C (GATT/SR/GAS/BV-01-C after ID conversion) update initial condition and Pass Verdict Update TCMT per TSE 4236 comment ID 10166 TSE 4222: new test cases TP/GAR/CL/BV-34-C, TP/GAR/CL/BV-35-C, TP/GAR/SR/BV-34-C, TP/GAR/SR/BV-35-C (GATT/CL/GAR/BV-34-C, GATT/CL/GAR/BV-35, GATT/SR/GAR/BV-34-C, GATT/SR/GAR/BV-35-C) after ID conversion) TSE 4225: new test cases TP/GAD/CL/BV-07-C, TP/GAD/CL/BV-08-C, TP/GAD/SR/BV-07-C, TP/GAD/SR/BV-08-C (GATT/CL/GAD/BV-07-C, GATT/CL/GAD/BV-08-C, GATT/SR/GAD/BV-07-C, GATT/SR/GAD/BV-08-C after ID conversion) TSE 4218: TP/GAW/CL/BV-05-C, TP/GAW/CL/BI-07-C, TP/GAW/CL/BI-08-C, TP/GAW/CL/BI-09-C, TP/GAW/CL/BI-11-C, TP/GAW/CL/BI-12-C, TP/GAW/CL/BI-13-C, TP/GAW/CL/BV-09-C, TP/GAW/CL/BI-25-C, TP/GAW/CL/BI-26-C, TP/GAW/CL/BI-27-C, TP/GAW/CL/BI-29-C, TP/GAW/CL/BI-30-C, TP/GAW/CL/BI-31-C (GATT/CL/GAW/BV-05-C, GATT/CL/GAW/BI-07-C, GATT/CL/GAW/BI-08-C, GATT/CL/GAW/BI-09-C, GATT/CL/GAW/BI-11-C, GATT/CL/GAW/BI-12-C, GATT/CL/GAW/BI-13-C, GATT/CL/GAW/BV-09-C, GATT/CL/GAW/BI-25-C, GATT/CL/GAW/BI-26-C, GATT/CL/GAW/BI-27-C, GATT/CL/GAW/BI-29-C, GATT/CL/GAW/BI-30-C, GATT/CL/GAW/BI-31-C after ID conversion) TSE 4251: TP/GAC/CL/BV-01-C (GATT/CL/GAC/BV-01-C after ID conversion): Test Procedure TSE 4307: TP/GAW/CL/BV-02-C (GATT/CL/GAW/BV-02-C after ID conversion): Update TCMT Proposed edits for TSE 4331: Include ATT in the scope (1) Add reference to ATT.ICS Redirect the (2.5) reference to ATT TCMT to the new 4.2 Split Test Case Mapping into 4.1 (GATT) and 4.2 (ATT) Replicate the ATT TCMT from ATT.TS 4.0.1 r3 Editorial cleanup in the references TSE 4326: GATT TCMT changes Input review comments for TSE 4331 Input Jdecuir's comments for italics, xref colors, section numbering, missing graphic, comment deletion. Added header to ATT TCMT. Changed formatting to "ATT:" and "GATT:" in TCMTs.

Publication Number	Revision Number	Date	Comments
			TSE 4386: Change mapping for TP/GAT/SR/BV-01-C from ATT: 4/30 to ATT:4/27 (GATT/SR/GAT/BV-01-C after ID conversion) Separate GAS/CL and GAS/SR to have separate mappings TCMT: Switch server/client timeout features based on changes to ATT ICS. TSE 4401: Remove duplicate entries in TCMT by consolidating rows
1	4.0.1	2011-07-12	Prepare for publication.
	4.0.2r0	2011-09-12	TSE 4210: update UUIDs for TP/GAD/SR/BV-01-C, TP/GAD/SR/BV-02-C, TP/GAD/SR/BV-03-C, TP/GAD/SR/BV-04-C, TP/GAD/SR/BV-05-C, TP/GAD/SR/BV-06-C (GATT/SR/GAD/BV-01-C, GATT/SR/GAD/BV-02-C, GATT/SR/GAD/BV-03-C, GATT/SR/GAD/BV-04-C, GATT/SR/GAD/BV-05-C, GATT/SR/GAD/BV-06-C after ID conversion) TSE 4327: update pass verdicts for TP/GAR/SR/BV-04-C, TP/GAR/SR/BV-07-C (GATT/SR/GAR/BV-04-C, GATT/SR/GAR/BV-07-C after ID conversion) TSE 4366: update TP/GAR/CL/BV-04-C, TP/GAR/SR/BV-04-C, TP/GAR/CL/BV-07-C, TP/GAR/SR/BV-07-C, TP/GAW/SR/BV-06-C (GATT/CL/GAR/BV-04-C, GATT/SR/GAR/BV-04-C, GATT/CL/GAR/BV-07-C, GATT/SR/GAR/BV-07-C, GATT/SR/GAW/BV-06-C after ID conversion); add new test cases TP/GAW/SR/BV-08-C, TP/GAW/SR/BV-10-C (GATT/SR/GAW/BV-08-C, GATT/SR/GAW/BV-10-C after ID conversion) TSE 4384: Update section 3.3.2 TSE 4503: TP/GAD/CL/BV-03-C, TP/GAD/CL/BV-03-I, TP/GAD/SR/BV-03-C (GATT/CL/GAD/BV-03-C and GATT/SR/GAD/BV-03-C after ID conversion): add additional Pass Verdict TSE 4540: TCMT updates for TP/GAR/SR/BI-34-C, TP/GAR/SR/BI-35-C (GATT/SR/GAR/BI-34-C, GATT/SR/GAR/BI-35-C after ID conversion) TSE 4564: TP/GAW/CL/BV-08-C, TP/GAW/CL/BI-20-C, TP/GAW/CL/BI-21-C, TP/GAW/CL/BI-22-C, TP/GAW/CL/BI-23-C, TP/GAW/CL/BI-24-C, TP/GAW/SR/BV-08-C, TP/GAW/SR/BI-20-C, TP/GAW/SR/BI-21-C, TP/GAW/SR/BI-22-C, TP/GAW/SR/BI-23-C, TP/GAW/SR/BI-24-C, TP/GAI/SR/BV-01-C, TP/GAI/CL/BV-01-C: Update MSCs (GATT/CL/GAW/BV-08-C, GATT/CL/GAW/BI-20-C, GATT/CL/GAW/BI-21-C, GATT/CL/GAW/BI-22-C, GATT/CL/GAW/BI-23-C, GATT/CL/GAW/BI-24-C, GATT/SR/GAW/BV-08-C, GATT/SR/GAW/BI-20-C, GATT/SR/GAW/BI-21-C, GATT/SR/GAW/BI-22-C, GATT/SR/GAW/BI-23-C, GATT/SR/GAW/BI-24-C, GATT/SR/GAI/BV-01-C, GATT/CL/GAI/BV-01-C after ID conversion)
	4.0.2r1	2011-12-16	Incorporate GATT-3 Test CR D09r04+

Publication Number	Revision Number	Date	Comments
	4.0.2r0	2012-02-08	TSE 4661: Incorporate GATT-3 Test CR D09r08 TSE 4502: Update TCMT to remove contradiction with ICS
	4.0.2r1	2012-02-15	TSE 4340, comment ID 12164: Delete Reference [4] from the test cases in which it appears
2	4.0.2	2012-03-30	Prepare for publication.
	4.0.3r0	2012-05-18	TSE 4709: New test cases TP/GAW/CL/BI-33-C through TP/GAW/CL/BI-36-C and TP/GAW/SR/BI-32-C, through TP/GAW/SR/BI-35-C (GATT/CL/GAW/BI-33-C through GATT/CL/GAW/BI-36-C and GATT/SR/GAW/BI-32-C through GATT/SR/GAW/BI-35-C after ID conversion) TSE 4744: TP/GAC/CL/BV-01-C (GATT/CL/GAC/BV-01-C after ID conversion): Change value in Initial Condition and in Test Procedure TSE 4711: TP/GAD/SR/BV-02-C (GATT/SR/GAD/BV-02-C after ID conversion): Test Procedure
	4.0.3r1	2012-06-27	Add subheads for 4.10.1 and 4.10.2 test cases; regenerate ToC TSE 4843: TP/GPA/CL/BV-12-C (GATT/CL/GPA/BV-12-C after ID conversion): Move examples to Notes section TSE 4844: TP/GPA/SR/BV-12-C (GATT/SR/GPA/BV-12-C after ID conversion): Purpose, Initial Condition, Test Condition, Notes TSE 4823: Update TCMT for TP/GPA/CL/BV-05-C through TP/GPA/CL/BV-10 (GATT/CL/GPA/BV-05-C through GATT/CL/GPA/BV-10-C after ID conversion) and TP/GPA/SR/BV-05-C through TP/GPA/SR/BV-10 (GATT/SR/GPA/BV-05-C through GATT/SR/GPA/BV-10-C after ID conversion)
3	4.0.3	2012-07-24	Prepare for publication.
	4.0.4r0	2012-10-10	TSE 4914: Removed “Permissions” from the values column for TP/GPA/SR/BV-01-C and TP/GPA/SR/BV-02-C in Table 4.3 (GATT/SR/GPA/BV-01-C and GATT/SR/GPA/BV-02-C after ID conversion) and TP/GPA/CL/BV-01-C and TP/GPA/CL/BV-02-C in Table 4.2 (GATT/CL/GPA/BV-01-C and GATT/CL/GPA/BV-02-C after ID conversion). TSE 4787: Changes to test case TP/GAD/CL/BV-03-C, and TP/GAD/CL/BV-03-I (GATT/CL/GAD/BV-03-C after ID conversion) TSE 4841: Changes to test case TP/GPA/CL/BV-12-C (GATT/CL/GPA/BV-12-C after ID conversion) TSE 4943: Added “/descriptor value length” to TP/GAW/SR/BI-32-C through TP/GAW/SR/BI-35-C, and TP/GAW/CL/BI-35-C (GATT/SR/GAW/BI-32-C through GATT/SR/GAW/BI-35-C and GATT/CL/GAW/BI-35-C after ID conversion).

Publication Number	Revision Number	Date	Comments
			TSE 4847: Corrected errors in TP/GPA/SR/BV-11-C (GATT/SR/GPA/BV-11-C after ID conversion), Test Procedure and Expected Outcome. TSE 4845: Changes to TP/GPA/SR/BV-11-C (GATT/SR/GPA/BV-11-C after ID conversion). TSE 4810: Added a paragraph to the initial condition of TP/GPA/CL/BV-03-C (GATT/CL/GPA/BV-03-C after ID conversion) to correct the “can’t specifically look for Secondary Services in GATT” problem.
	4.0.4r2	2012-11-12	Edits to TSE 4943, and 4847. TSE 4688: Changes to TP/GAD/CL/BV-07-C, TP/GAD/CL/BV-08-C, TP/GAD/SR/BV-07-C, and TP/GAD/SR/BV-08-C (GATT/CL/GAD/BV-07-C, GATT/CL/GAD/BV-08-C, GATT/SR/GAD/BV-07-C, and GATT/SR/GAD/BV-08-C after ID conversion). Added MSCs (examples) and removed the “All SDP records for GATT Services conform to the requirements in Table 9.1 in [1].…” In these test cases. TSE 4979: Added statement for clearing cache to the following test cases: TP/GAD/CL/BV-01-C, TP/GAD/CL/BV-01-I, TP/GAD/CL/BV-02-C, TP/GAD/CL/BV-02-I, TP/GAD/CL/BV-06-C, TP/GAD/CL/BV-06-I, and TP/GPA/CL/BV-02-C (GATT/CL/GAD/BV-01-C, GATT/CL/GAD/BV-02-C, GATT/CL/GAD/BV-06-C, and GATT/CL/GPA/BV-02-C after ID conversion).
	4.0.4r3	2012-11-15	TSE 5012: Edits to TP/GAW/CL/BV-02-C and TP/GAW/SR/BV-02-C (GATT/CL/GAW/BV-02-C and GATT/SR/GAW/BV-02-C after ID conversion) to change ATT_ Write_Command to ATT_SIGNED_WRITE_CMD.
4	4.0.4	2012-11-16	Prepare for Publication
	4.0.5rT	2013-05-24	Template Conversion: - Update of language to match BTI approved wording (example, fail verdicts) - Removal of Test Subgroup Objectives - Removal of sections marked “N/A”
	4.0.5r1	2013-05-29	TSE 5011: Updated MSC in TP/GAW/CL/BV-01-C (GATT/CL/GAW/BV-01-C after ID conversion). TSE 5028: Updated TCMT mapping for TP/GAW/SR/BI-33-C (GATT/SR/GAW/BI-33-C after ID conversion) to “GATT 4/15 OR ATT 4/23” TSE 5093: Editorially updated TP/GAW/SR/BI-19-C (GATT/SR/GAW/BI-19-C after ID conversion) from regular text to heading text. TSE 5115: Edited the test procedure and MSC for TP/GAW/SR/BI-09-C and TP/GAW/SR/BI-27-C (GATT/SR/GAW/BI-19-C and GATT/SR/GAW/BI-27-C after ID conversion).

Publication Number	Revision Number	Date	Comments
			TSE 5142: Deleted the following test cases: TP/GAD/CL/BV-01-I, TP/GAD/CL/BV-02-I, TP/GAD/CL/BV-03-1, TP/GAD/CL/BV-04-I, TP/GAD/CL/BV-05-I and TP/GAD/CL/BV-06-I. The implications of this removal are that the corresponding –C test cases will become category B, as tracked in the TCRL.
	4.0.5r2	2013-06-06	BTI Review, Comments from Magnus and Alicia
5	4.0.5	2013-07-02	Prepare for Publication
	4.0.6rT, 4.0.6rTr3	2013-07-03, 2013-09-27	Template Conversion: - Update of language to match BTI approved wording (example, removed fail verdicts) - Removal of Test Subgroup Objectives and sections marked “N/A”
	4.0.6rTr4	2013-09-27	Template Review Comment Resolution & Changes Accepted.
	4.1.0r01	2013-09-27	TSE 5262: Removal of test case TP/GAW/CL/BV-07-C and TCMT update. Update to MSC for TP/GAW/CL/BI-32-C (GATT/CL/GAW/BI-32-C after ID conversion). TSE 5211: Update to Test Procedure and Pass Verdict for GATT Declarations and Descriptors - by client (TP/GPA/CL/BV-01-C through TP/GPA/CL/BV-08-C) (GATT/CL/GPA/BV-01-C through GATT/CL/GPA/BV-08-C after ID conversion)and GATT Declarations and Descriptors - from server (TP/GPA/SR/BV-01-C through TP/GPA/SR/BV-07-C, and TP/GPA/SR/BV-01-C) (GATT/SR/GPA/BV-01-C through GATT/SR/GPA/BV-07-C after ID conversion). TSE 5181: Updated Test Verdict in TP/GAT/CL/BV-01-C, TP/GAT/CL/BV-02-C, and TP/GAT/SR/BV-01-C (GATT/CL/GAT/BV-01-C, GATT/CL/GAT/BV-02-C, and GATT/SR/GAT/BV-01-C after ID conversion).
	4.1.0r02	2013-10-04	Dual Mode Topology CR
	4.1.0r03	2013-10-07	TSE 5290: Removed TP/GAD/CL/BV-02-I from the TCMT.
	4.1.0r04	2013-11-08	Added IXIT to references
6	4.1.0	2013-12-03	Prepare for Publication
	4.1.1r00	2014-04-07	TSE 5424: Updated the Initial Condition of TP/GPM/SR/BV-01-C (GATT/SR/GPM/BV-01-C after ID conversion). TSE 5547: Removed “or shorter” wording in the test case description for TP/GAW/SR/BI-32-C and TP/GAW/SR/BI-34-C (GATT/SR/GAW/BI-32-C and GATT/SR/GAW/BI-34-C after ID conversion). TSE 5513: Updated MSC in TP/GAW/CL/BI-32-C (GATT/CL/GAW/BI-32-C after ID conversion) to reference "TP/GAC/CL/BV-01-C" (GATT/CL/GAC/BV-01-C after ID conversion).

Publication Number	Revision Number	Date	Comments
			TSE 5487: Updated the discovery command in step one of the test procedure and pass verdict of TP/GPA/SR/BV-12-C (GATT/SR/GPA/BV-12-C after ID conversion) from “ATT_READ_BY_TYPE_REQ” to “ATT_FIND_INFORMATION_REQ.”
	4.1.1r01	2014-06-17	BTI Review, Magnus, editorial corrections
7	4.1.1	2014-07-07	TCRL 2014-1 Publication
	4.2.0r00	2014-11-24	Revved version to align with Core 4.2 release
8	4.2.0	2014-12-04	Prepared for TCRL 2014-2 publication
	4.2.1r00	2015-05-05	TSE 6274: Corrected references in TP/GPM/SR/BV-01-C (GATT/SR/GPM/BV-01-C after ID conversion)
9	4.2.1	2015-07-14	Prepared for TCRL 2015-1 publication
	4.2.2r00	2015-10-07	TSE 6271: Corrected maximum value allowed for MTU size; added additional initial condition for TP/GAC/SR/BV-01-C (GATT/SR/GAC/BV-01-C after ID conversion); corrected ATT_EXCHANGE_MTU_REQ value in MSC; and corrected reference to ATT in Section 4.3.2.
	4.2.2r01	2015-10-12	TSE 6392: Corrected test case mapping for TP/GAW/CL/BV-02-C (GATT/CL/GAW/BV-02-C after ID conversion).
	4.2.2r02	2015-10-23	Reviewed by Alicia Courtney. Updated MSC for TP/GAC/SR/BV-01-C (GATT/SR/GAC/BV-01-C after ID conversion); editorial corrections to TCMT.
10	4.2.2	2015-12-22	Prepared for TCRL 2015-2 publication.
	4.2.3r00, 4.2.3r01, 4.2.3r02, 4.2.3r03	2016-02-01, 2016-02-17, 2016-02-20, 2016-02-23	Converted test case IDs to new convention defined in TSTO v4.1 and transfer over to new template
	4.2.3r04	2016-03-01	TSE 6790: Expanded Initial Condition for test case GATT/SR/GPA/BV-02-C. TSE 5483: Major change. Rewrite of Sections GATT Declarations and Descriptors – by Client (test cases GATT/CL/GPA/BV-01-C through GATT/CL/GPA/BV-08-C) and GATT Declarations and Descriptors – from Server (test cases GATT/SR/GPA/BV-01-C through GATT/SR/GPA/BV-08-C) (Sections 4.10.1 and 4.10.2).
	4.2.3r05	2016-03-09	TSE 6651: TCMT Items updated to remove ATT ICS Mapping which has been moved instead to the ICS conditionals.
	4.2.3r06	2016-04-27	Corrected some omissions from the conversion to the new test case ID conventions.
11	4.2.3	2016-07-13	Prepared for TCRL 2016-1 publication.

Publication Number	Revision Number	Date	Comments
	5.0.0r00	2016-10-07	TSE 7558 (erratum 4654) - Clarification for octet alignment in Characteristic Aggregate Format tests GATT/CL/GPA/BV-11-C and GATT/SR/GPA/BV-11-C. TSE 7798: Corrected mapping for GATT/CL/GAW/BV-02-C from GATT 0/2 to 2/2 Advanced document number to 5.0.0 to align with Bluetooth Core Spec 5.0 release.
	5.0.0r01	2016-10-17	TSE 7573 (erratum 5610): Added new test case GATT/SR/GAW/BV-11-C for Characteristic Value Reliable Writes - No Pending Prepared Write Requests. Updated TCMT with new entry.
	5.0.0r02	2016-10-19	Completed conversion to new Test Case ID conventions as defined in TSTO v4.1
12	5.0.0	2016-12-13	Approved by BTI. Prepared for TCRL 2016-2 publication.
	5.0.1r00	2017-04-10	TSE 8719: Changed initial condition of GATT/CL/GAR/BI-34-C and GATT/SR/GAR/BI-35-C to “Section 4.2.1.1”. Changed initial condition of GATT/CL/GAR/BI-35-C, GATT/SR/GAR/BI-34-C to “Section 4.2.1.2”. Cleaned up TCMT for tests GATT/SR/GAR/BI-34-C and GATT/SR/GAR/BI-35-C by merging rows in TCMT and updating feature to add “supported transport” as reviewers pointed out the test case mapping was the same for the two tests.
13	5.0.1	2017-07-05	Approved by BTI. Prepared for TCRL 2017-1 publication.
	5.0.2r00	2017-08-29	TSE 9718: Added UNS to Table 4.1. Added new test cases GATT/SR/UNS/BI-01-C and GATT/SR/UNS/BI-02-C in new section “Unsupported Requests and Commands” and in the TCMT.
	5.0.2r01	2017-09-27	TSE 9857: Removed 58 duplicate test cases from Test Cases section and TCMT: GATT/CL/GAR/BI-23-C – 33-C; GATT/SR/GAR/BI-23-C – 33-C; GATT/CL/GAW/BI-14-C – 15-C, 17-C – 27-C, 29-C – 31-C, 35-C – 36-C; and GATT/SR/GAW/BI-14-C – 15-C, 17-C – 27-C, 29-C – 31-C, 34-C – 35-C.
	5.0.2r02	2017-10-31	TSE 9857: Removed test cases from the TCMT: SR/GAW/BI-14-C – 15-C and 17-C – 19-C, and CL/GAW/BI-14-C – 15-C and 17-C – 19-C.
14	5.0.2	2017-12-07	Approved by BTI. Prepared for TCRL 2017-2 publication.
	5.0.3r00-04	2018-02-20 – 2018-05-10	TSE 10284 (rating 1): Updated Reference for GATT/SR/UNS/BI-01-C. TSE 10347 (rating 3): Simplified the Initial Condition, Test Procedure and MSC, and the Pass Verdict of test case GATT/SR/GAC/BV-01-C to show IUT doesn't support Read Blob.

Publication Number	Revision Number	Date	Comments
			TSE 10525 (rating 3): Added a preamble for Exchange MTU. Updated the initial conditions globally to remove references to GATT/SR/GAC/BV-01-C and GATT/CL/GAC/BV-01-C and instead replaced with a statement referencing the new preamble section. TSE 10522 (rating 3): Removed invalid behavior from the initial condition of test cases GATT/CL/GAW/BI-02-C and 07-C; and GATT/CL/GAR/BI-14-C, 19-C, and 01-C. TSE 10369 (rating 3): Changed name of test case GATT/SR/GPA/BV-12-C to [Characteristic Presentation Format Descriptors – from Server]. Added 3.3.3.5 to Reference 1. Updated test procedure and pass verdict to include "Presentation" in the test case name. TSE 10657 (rating 3): Removed invalid behavior from initial condition for test cases GATT/CL/GAR/BI-02-C, 06-C, 12-C, and 18-C; and GATT/CL/GAW/BI-03-C and 08-C.
15	5.0.3	2018-07-02	Approved by BTI. Prepared for TCRL 2018-1 publication.
	5.0.4r00-r03	2018-07-27 - 2018-11-12	Incorporated GATT Caching TEST CR r09. Added new TCIDs GATT/CL/GAS/BV-02-C and 03-C; GATT/SR/GAS/BV-02-C through 07-C; and added them to the TCMT. TSE 10616 (rating 2): In the TCMT, removed test case GATT/SR/GAR/BV-08-C from GATT 4/10, and added test case GATT/SR/GAR/BV-08-C to GATT 4/20. Issue 11143: Updates to TCMT entries for GATT/CL/GAS/BV-02-C, GATT/SR/GAS/BV-02-C, GATT/SR/GAS/BV-05-C, GATT/SR/GAS/BV-06-C, GATT/SR/GAS/BV-04-C, GATT/SR/GAS/BV-07-C, GATT/SR/GAS/BV-03-C Added new reference for Bluetooth Core Specification version 5.1.
	5.1.0r00-r01	2018-11-13 - 2018-11-21	Updated revision number from 5.0.4 to 5.1.0 to align with the adoption of Core Specification version 5.1 TSE 11290 (rating 4): Addition of ANNEX: Generic GATT Integrated Tests (GGIT), 6.1 GGIT Inputs, 6.2 Server Test Procedures (SGGIT), 6.3 Client Test Procedures (CGGIT) and associated subsections.
16	5.1.0	2018-12-07	Approved by BTI. Prepared for TCRL 2018-2 publication.
	5.1.1r00–r06	2019-02-19 – 2019-06-18	TSE 11481 (rating 3): Updated Steps 6 and 7 in SGGIT/CHA [Characteristic GGIT] to be service-specific. TSE 11466 (rating 3): Updated section heading and preamble procedure for "Characteristic Configuration for Notification" and "Characteristic Configuration for Indication".

Publication Number	Revision Number	Date	Comments
			Added new sections "Characteristic Configuration for Notification – IUT as Client" and "Characteristic Configuration for Indication – IUT as Client". Updated initial condition for test cases GATT/CL/GAR/BV-01-C, 03-C, 04-C, 07-C; GATT/SR/GAR/BV-03-C; GATT/CL/GAW/BV-01-C, 08-C; GATT/SR/GAW/BV-01-C; GATT/CL/GAN/BV-01-C. Updated initial condition and pass verdict for test cases GATT/CL/GAR/BV-05-C, 06-C; GATT/SR/GAR/BV-06-C; GATT/CL/GAW/BV-03-C, 05-C, 09-C. Updated initial condition, test procedure, and pass verdict for test cases GATT/SR/GAR/BV-05-C; GATT/CL/GAW/BV-06-C; GATT/CL/GAW/BI-32-C. Updated pass verdict for test case GATT/CL/GAI/BV-01-C. Updated Characteristic_11, 12, and 21 in Table 6.2 GGIT Input Table Format. Updated 2nd paragraph in section "Example Usage – Blood Pressure Service TS". Updated Steps 1 and 2 in section "SGGIT/SER [Service GGIT]". Added new Step 3 in section "SGGIT/CHA [Characteristic GGIT]". Updated Steps 1 and 2 in section "CGGIT/SER [Service GGIT]". Added new Step 3 and removed Steps 7 and 8 in section "CGGIT/CHA [Characteristic GGIT]". TSE 11617 (rating 3): Updated text in Encryption Key Size section; revised the initial conditions (and MSCs where required) for tests that are only meant for LE transport (test cases GATT/CL/GAD/BV-07-C and -08-C; GATT/SR/GAD/BV-07-C and -08-C; GATT/CL/GAR/BI-03-C – -05-C; GATT/SR/GAR/BI-03-C – -05-C; GATT/CL/GAR/BI-09-C – -11-C; GATT/SR/GAR/BI-09-C – -11-C; GATT/CL/GAR/BI-15-C – -17-C; GATT/SR/GAR/BI-15-C – -17-C; GATT/CL/GAR/BI-20-C – -22-C; GATT/SR/GAR/BI-20-C – -22-C; GATT/CL/GAR/BI-34-C and -35-C; GATT/SR/GAR/BI-34-C and -35-C; GATT/CL/GAW/BV-02-C; GATT/SR/GAW/BV-02-C; GATT/SR/GAW/BI-01-C; GATT/CL/GAW/BI-04-C – -06-C; GATT/SR/GAW/BI-04-C – -06-C; GATT/CL/GAW/BI-11-C – -13-C; GATT/SR/GAW/BI-11-C – -13-C). Revised the TCMT for tests that contained references to GAP 0/2.

Publication Number	Revision Number	Date	Comments
			TSE 11538 (rating 4): Removed Complete GATT and redundant test cases no longer needed that rely on higher layer profiles or are implementation specific (deleted test cases GATT/CL/GPA/BV-01-C – -08-C and GATT/SR/GPA/BV-01-C – -08-C). Revised TCMT for GATT/SR/GPA/BV-11-C and -12-C and GATT/CL/GPA/BV-11-C and -12-C based on ICS changes from this TSE. TSE 11775 (rating 1): Updated the MSC for test case GATT/SR/GAS/BV-01-C to add further explanation to the sequence diagram. TSE 11943 (rating 1): Replaced the MSC for test case GATT/CL/GAW/BI-09-C to fix an invalid value.
17	5.1.1	2019-08-01	Approved by BTI. Prepared for TCRL 2019-1 publication.
	p18r00–r14	2019-08-21 – 2019-12-05	Added test groups to accommodate adoption of Core Specification V5.2 with regard to EATT CR r07. Updated References section with new Core Specifications. Updated Test Suite Structure section with EATT-related material. Updated Setup Preambles section with EATT-related material. Added test case GATT/SR/GAC/BI-01-C to Server Configuration section; added test cases GATT/CL/GAR/BV-08-C – -11-C and BI-36-C – -45-C and GATT/SR/GAR/BV-09-C – -12-C and BI-36-C – -45-C to Read section; added test cases GATT/CL/GAW/BV-10-C and GATT/SR/GAW/BV-12-C – -14-C and GATT/CL/GAW/BI-37-C to Write section; added test cases GATT/CL/GAN/BV-02-C and -03-C and GATT/SR/GAN/BV-02-C and -03-C to Notification and Indication section; added test cases GATT/SR/GAS/BV-08-C and -09-C to Generic Attribute Profile Services section; added test cases GATT/CL/GAT/BV-03-C and -04-C to GATT Transaction Timeouts section; updated test case GATT/SR/GPM/BV-01-C in Multiple ATT Bearer Support section. Updated TCMT accordingly. Updated per Issue 12484 (CR from comment 49740). Updated test case table location/heading for sections containing a TCID table within the “Read”, “Notification and Indication”, “Generic Attribute Profile Services” (not in Issue CR, but same problem), and “GATT Transaction Timeouts” sections (moved from “Expected Outcome” to “Notes” heading. TSE 12259 (rating 3): Added an initial condition to test case GATT/CL/GAS/BV-01-C so that Lower Tester waits for IUT to write CCCD before indicating. TSE 12001 (rating 2): Added inconclusive verdicts to the Pass/Inconclusive/Fail Verdict Conventions section in the Introduction section in the Test Cases section and added an inconclusive verdict to test cases GATT/SR/GAS/BV-02-C, -05-C, and -06-C.

Publication Number	Revision Number	Date	Comments
			Updated per test issue 12414 (CR from comment 50004). For “Handle Value Multiple Notification – to Client” section, updated the Test Purpose and Initial Condition clauses, replaced the MSC, added two new test steps, and updated the Pass verdict. For the “Handle Value Multiple Notification – by Server” section, updated the Test Purpose and Initial Condition clauses, replaced the MSC, added and updated test steps, and updated the Pass verdict. Added a new section for “Enabling the Features in Client Supported Features” containing new test cases GATT/CL/GAS/BV-04-C and -05-C. Updated the TCMT accordingly. Updated per test issue 12508 (CR from comment 50003). Added “Client Supported Features Configuration” section to “Setup Preambles” section, with several subsections by IUT role. Updated initial condition clauses for test case GATT/SR/GAC/BI-01-C in the Server Configuration section; test cases GATT/CL/GAR/BV-08-C – -11-C, GATT/CL/GAR/BI-36-C – -45-C, GATT/SR/GAR/BV-09-C – -12-C, and GATT/SR/GAR/BI-36-C – -45-C in the Read section; test cases GATT/CL/GAW/BV-10-C and -BI-37-C and GATT/SR/GAW/BV-12-C – -14-C in the Write section; test cases GATT/CL/GAN/BV-02-C and -03-C and GATT/SR/GAN/BV-02-C and -03-C in the Notification and Indication section; test cases GATT/SR/GAS/BV-08-C and -09-C and GATT/CL/GAS/BV-04-C and -05-C in the Generic Attribute Profile Services section; test cases GATT/CL/GAT/BV-03-C and -04-C in the GATT Transaction Timeouts section; and test case GATT/SR/GPM/BV-01-C in the Multiple ATT Bearer Support section. Updated per test issue 12509 (CR from comment 50073): Updated Initial Condition clauses for test case GATT/SR/GAC/BI-01-C in the Server Configuration section; test cases GATT/CL/GAR/BV-08-C – -11-C, GATT/CL/GAR/BI-36-C – -45-C, GATT/SR/GAR/BV-09-C – -12-C, and GATT/SR/GAR/BI-36-C – -45-C in the Read section; test cases GATT/CL/GAW/BV-10-C and -BI-37-C and GATT/SR/GAW/BV-12-C – -14-C in the Write section; test cases GATT/CL/GAN/BV-02-C and -03-C and GATT/SR/GAN/BV-02-C and -03-C in the Notification and Indication section; test cases GATT/SR/GAS/BV-08-C and -09-C and GATT/CL/GAS/BV-04-C and -05-C in the Generic Attribute Profile Services section; test cases GATT/CL/GAT/BV-03-C and -04-C in the GATT Transaction Timeouts section; and test case GATT/SR/GPM/BV-01-C in the Multiple ATT Bearer Support section.

Publication Number	Revision Number	Date	Comments
			Updated per test issue 12510 (CR from comment 50074): Updated TCMT. Test cases GATT/CL/GAS/BV-04-C and -05-C were added to the TCMT during integration of Issue 12414 (same data, but a different location in the TCMT; left as is after 12414). Updated per test issue 12629 (CR from comment 50448): Updated the "Enabling the Features in Client Supported Features" section's test Steps 1 and 2 to fix a typo. TSE 12574 (rating 4): In the Annex, added a "Related to Primary Service (Optional)" column to the "GGIT Input Table Format" table; added an "Example Usage - Itinerary Sharing Profile TS" section; updated items in the "Server test procedures (SGGIT)" section and added an "SGGIT/INC [Included Service GGIT]" section; updated items in the "Client test procedures (CGGIT)" section and added a "CGGIT/INC [Included Service GGIT]" section. Incorporated entire new ANNEX section for "Generic GATT tests for Control Point" per the review item in BTI Spec Workspace (CR from doc labeled "CPIT_r6.docx"). Magnus and Ismail further configured the new annex and inserted queries. I made Ismail's changes when additional SME consideration was not required. Incorporated additional ANNEX feedback from Jorg's review copy from "MS2" version that was checked into ISOAL doc location in DocMan. Issue 12627 (CR from comment 51453): For "Client Characteristic Configuration Descriptor per ATT Client" section, moved test case number into configuration table with other new test cases GATT/SR/GPM/BV-02-C – -06-C; updated test purpose, initial condition, test procedure, and pass verdict to match CR text; updated TCMT accordingly. TSE 12120 (rating 2): For test case GATT/SR/GAS/BV-01-C, updated test case name, test purpose, initial conditions, MSC, test steps, and pass verdict. TCMT entry was already in place (items read the same). TSE 12523 (rating 1): Changed GATT test cases to table-based format in Sections 4.4–4.12. Replaced .X and Milan references with real numbers. TSE 12926 (rating 1): Fixed "Lower Tester expects" wording to "Lower Tester receives" wording for section containing test case GATT/SR/GAW/BV-11-C (only such instance in entire TS). Revised document numbering convention, setting last release publication of 5.1.1 as p17; added publication number column to Revision History. Reverted previous TSE 12523 CR and integrated simplified change from comment 53376.

Publication Number	Revision Number	Date	Comments
			TSE 13087 (rating 4): Updated Annex section. Modified the following sections: “Input table for SER-, CHA-, and DES-tests” (and related example sections), ”Example Usages”, “Server test procedures (SGGIT)”, “SGGIT/SER [Service GGIT]”, “SGGIT/CHA [Characteristic GGIT]”, “SGGIT/DES [Descriptor GGIT]”, “Client test procedures [CGGIT]”, ”CGGIT/SER [Service GGIT]”, and “CGGIT/CHA [Characteristic GGIT]”; deleted the following sections: “SGGIT/INC [Included Service GGIT]” and “CGGIT/INC [Included Service GGIT]”. Continued extended integration of TSE 12523, with CR added in comment 53474. Moved certain test cases from TC table into section heading and deleted TCs that were no longer necessary (including from TCMT and TCRL): GATT/CL/GAR/BV-09-C, BI-37-C, BI-39-C, BI-41-C, BI-43-C, BI-45-C; GATT/CL/GAT/BV-04-C; GATT/SR/GAR/BV-10-C, BI-37-C, BI-39-C, BI-41-C, BI-43-C, and BI-45-C; GATT/CL/GAN/BV-03-C; GATT/SR/GAN/BV-03-C; and GATT/SR/GAS/BV-09-C. Updated Contributors list.
18	p18	2020-01-07	Approved by BTI on 2019-12-22. Prepared for TCRL 2019-2 publication.
	p18 edition 2	2020-01-24	Fixed broken cross-references with healthy links and prepared for edition 2 publication.
	p18e3r00	2020-02-04	TSE 13420 (rating 1): Restored TCMT items errantly overwritten during insertion of new test cases from EATT CR for Core V5.2. Affected test cases are: GATT/CL/GAI/BV-01-C; GATT/CL/GAN/BV-01-C; GATT/CL/GAR/BV-06-C; GATT/CL/GAW/BI-32-C; GATT/CL/GAW/BV-06-C and -08-C; GATT/SR/GAI/BV-01-C; GATT/SR/GAN/BV-01-C; GATT/SR/GAR/BV-06-C; GATT/SR/GAT/BV-01-C; GATT/SR/GAW/BI-11-C – -13-C and -33-C; and GATT/SR/GAW/BV-06-C, -07-C, and -10-C; also moved GATT/SR/GAS/BV-08-C to a new location within the TCMT.
	p18 edition 3	2020-02-21	Prepared for edition 3 publication.
	p19r00	2020-06-22 – 2020-06-23	TSE 13111 (rating 3): To address an issue with “ATT 2/3 does not mean multiple ATT bearer support”: Updated initial conditions and added an “EATT Supported bit” column to the Test Case Configuration table for the section containing test cases GATT/SR/GPM/BV-01-C – -06-C; updated the test purpose for test cases GATT/CL/GAW/BV-10-C and GATT/CL/GAW/BI-37-C; updated the section title and the test purpose for sections containing test cases GATT/CL/GAR/BV-10-C and -11-C and test cases GATT/SR/GAR/BV-11-C and -12-C; updated the TCMT accordingly. Additionally, updated only the TCMT entries for test cases GATT/SR/GAW/BV-12-C – -14-C.

Publication Number	Revision Number	Date	Comments
			TSE 13156 (rating 2): Corrected problems in the TCMT. TSE 13342 (rating 4): Added SDP and SDPNF test sections to the GGIT annex (used updated CR in comment 59941). TSE 14717 (rating 4): Updated GGIT Annex to address Unique instances of services or characteristics.
19	p19	2020-12-22	Template-related editorials, including replacing Conformance and Pass/Fail Verdict verbiage, recategorizing contractors as Bluetooth SIG, updating TCIDs with Heading 8 and 9 new styles. Approved by BTI on 2020-12-03. Prepared for TCRL 2020-1 publication.
	p20r00–r12	2021-02-05 – 2021-05-24	TSE 13028 (rating 2): Updated initial conditions for TCs GATT/CL/GAW/BV-10-C and BI-37-C and GATT/SR/GAW/BV-12-C – -13-C to address an issue with packet size. TSE 13112 (rating 1): Deleted TCs GATT/CL/GAW/BV-10-C and BI-37-C because a GATT client should not have a requirement to write across multiple ATT bearers. Updated TCMT accordingly. TSE 13588 (rating 4): Updated section previously containing only TC GATT/SR/GAC/BI-01-C by changing its title, test purpose, reference, initial condition, MSC, test procedure, and pass verdict and adding a test case config table and new TCs GATT/SR/GAC/BI-02-C and -03-C; added a new section containing new TCs GATT/SR/GAW/BI-36-C – -38-C. Updated TCMT accordingly. TSE 13605 (rating 1): Updated instances of “ATT_Read_Multiple_Variable_Length_Request” to “ATT_READ_MULTIPLE_VARIABLE_REQ” and “ATT_Read_Multiple_Variable_Length_Response” to “ATT_READ_MULTIPLE_VARIABLE_RSP” in test cases and MSCs throughout. Corrected pdu opcode for ATT_READ_MULTIPLE_VARIABLE_REQ to “0x20” in GATT/SR/GAS/BV-08-C. TSE 13606 (rating 1): Corrected references to IUT and Lower Tester in Step 2 of GATT/CL/GAT/BV-03-C test procedure to reflect that IUT is the Client. TSE 14642 (rating 4): To address an issue with an ATT server crash when receiving a second request before replying to the first request, added new TCs GATT/SR/GAR/BI-45-C and GATT/CL/GAI/BI-01-C. Updated TCMT accordingly. TSE 14932 (rating 1): Added SCCD info to the GGIT tests. TSE 14993 (rating 3): Updated initial condition, test procedure, and pass verdict for section containing TCs GATT/SR/GPM/BV-01-C – -06-C.

Publication Number	Revision Number	Date	Comments
			TSE 15177 (rating 2): Updated EATT-related preambles to take SDP into consideration. TSE 15216 (rating 1): Clarified a test step for TC GATT/SR/GAS/BV-08-C. TSE 15760 (rating 2): Updated initial conditions of TCs GATT/CL/GAC/BV-01-C and GATT/SR/GAC/BV-01-C and BI-01-C to address a change made in the ICS. TSE 15770 (rating 3): Replaced the MSCs for TCs GATT/CL/GAW/BI-09-C and GATT/SR/GAW/BI-09-C (also fixed parameter in pass verdict for the latter). TSE 15824 (rating 1): Replaced the MSC for TC GATT/SR/GAN/BV-02-C. TSE 15846 (rating 1): Replaced the MSC for TC GATT/SR/GAS/BV-08-C. TSE 15848 (rating 2): Updated TCMT entries for TCs GATT/SR/GAN/BV-02-C and GATT/SR/BAS/BV-08-C. TSE 15949 (rating 1): Updated Test Strategy and “ATT and EATT Bearers” setup preamble. TSE 16160 (rating 4): To address E15764 so that an unaware client using multiple ATT bearers waits until all servers have responded before reading the Database Hash, added a reference to the ATT section of the Core Spec v5.3 and added a new section with new TCs GATT/CL/GPM/BV-07-C – -12-C. Updated TCMT accordingly. TSE 16190 (rating 4): To address E15876, Client Characteristic Configuration requirement different between 5.1 and 5.2, added a new TC GATT/SR/GPM/BV-13-C to the “Client Characteristic Configuration Descriptor per ATT Client” section. Updated TCMT accordingly, and updated TCMT entry for GATT/SR/GPM/BV-01-C. TSE 16212 (rating 2): To address an issue in E15831 with not including the GATT start/stop handle in SDP records, updated the Pass verdict in the “SGGIT/SDP [Validate SDP Record]” section. TSE 16374 (rating 1): To address E15831, GAP SDP Interoperability Requirements updated for ATT/EATT support, updated the Initial Condition of TC GATT/CL/GAD/BV-07-C. TSE 16492 (rating 4): Updated the GGIT section to add indications to the Features Characteristic in the specifications. TSE 16590 (rating 2): Updated the GGIT section to account for “No instances of services or characteristics”. TSE 16592 (rating 2): Updated the GGIT section to account for “Skip-Read” and “Skip-Write” to allow only skipping the appropriate test steps.

Publication Number	Revision Number	Date	Comments
			TSE 16950 (rating 2): Updated initial condition of section containing TCs GATT/SR/GPM/BV-01-C – -06-C.
20	p20	2021-07-13	Approved by BTI on 2021-06-27. Prepared for TCRL 2021-1 publication.
	p21r00–r07	2021-08-16 – 2021-12-20	TSE 16914 (rating 2): Updated the TCMT entries for TCs GATT/SR/GAS/BV-04-C – -07-C. TSE 16929 (rating 2): Updated initial condition, test procedure, and Pass verdict for section containing TCs GATT/SR/GPM/BV-01-C – -06-C and for TC GATT/SR/GPM/BV-13-C. TSE 17404 (rating 2): To address lingering issues from E15764, updated TCMT entries for TCs GATT/CL/GPM/BV-07-C – -12-C. TSE 17410 (rating 2): Updated TCMT entry for TC GATT/SR/GAC/BI-03-C to add EATT over BR/EDR support. TSE 17436 (rating 2): Updated the preamble for ATT and EATT Bearers to provide an option to select the bearer to be used. TSE 17443 (rating 2): Updated the TCMT entry for GATT/CL/GAS/BV-03-C. TSE 17444 (rating 2): Updated the TCMT entry for GATT/SR/GAC/BI-01-C. TSE 17460 (rating 2): Updated MSC and test steps for GATT/SR/GAW/BV-14-C. TSE 18044 (rating 1): Updated GGIT CHA test groups for properties such as Notify, Indicate, and Extended. TSE 18101 (rating 1): Updated SGGIT/SDP test to remove start and end handles no longer needed. Performed template-related editorials, including aligning the copyright page with v2 of the DNMD.
21	p21	2022-01-25	Approved by BTI on 2021-12-27. Prepared for TCRL 2021-2 publication.
	p22r00–r04	2022-02-02 – 2022-05-16	TSE 17781 (rating 2): Updated the TCMT entries for GATT/CL/GPM/BV-07-C – -12-C. TSE 17908 (rating 2): Updated the MSC, test procedure, and expected outcome for GATT/SR/GAS/BV-08-C. TSE 17992 (rating 2): Updated the Initial Condition for GATT/SR/GPA/BV-11-C. TSE 18045 (rating 1): Updated the figure and text in the Overview section. TSE 18167 (rating 1): Updated explanatory text for GGIT Input Tables section. TSE 18381 (rating 2): Added “Fields and Bits Reserved for Future Use” section. TSE 18516 (rating 2): Updated the MSC for GATT/CL/GAN/BV-02-C.

Publication Number	Revision Number	Date	Comments
			TSE 18623 (rating 1): Updated the test purpose, MSC, and expected outcome for GATT/SR/GAR/BI-11-C. TSE 18948 (rating 2): Corrected an initial condition for the section containing GATT/SR/GPM/BV-01-C – -06-C. Performed template-related formatting fixes. Made consistency checker editorials (aligning TCID description w/ TCRL description).
22	p22	2022-06-28	Approved by BTI on 2022-05-31. Prepared for TCRL 2022-1 publication.
	p23r00–r03	2022-07-27 – 2022-11-29	TSE 18781 (rating 2): Updated TCMT entries for GATT/SR/GAW/BI-37-C and -38-C. TSE 20363 (rating 1): Corrected a test step in the CGGIT/CHA [Characteristic GGIT] section. TSE 20365 (rating 1): Corrected wording in the intro to the SGGIT/SER [Service GGIT] section. TSE 22134 (rating 3): Updated the TCMT entries to reflect the splitting of GATT 2/3 into GATT 2/3a and 2/3b. TSE 22143 (rating 2): Updated an initial condition in GATT/CL/GAR/BI-36-C. TSE 22189 (rating 2): Corrected the TCMT entry for GATT/CL/GAT/BV-03-C.
23	p23	2023-02-07	Approved by BTI on 2022-12-28. Prepared for TCRL 2022-2 publication.
	p23ed2r00–r01	2023-03-08 – 2023-03-22	TSE 22586 (rating 1): Updated the server test procedures for Characteristic GGIT (SGGIT/CHA). TSE 22879 (rating 1): Updated language in server test procedures (SGGIT) and client test procedures (CGGIT) in Section 6, Annex: Generic GATT Integrated Tests (GGIT).
	p23 edition 2	2023-04-13	Approved by BTI on 2023-04-13. Prepared for edition 2 publication.
	p24r00–r02	2023-04-15 – 2023-05-02	TSE 20590 (rating 1): Added SGGIT Invalid Characteristic or Descriptor Write (ICDW) test case and example input table. TSE 22276 (rating 1): Deleted TC Configuration description and column from the GGIT TCs using CP, ICP, NCP, and ISFC identifiers. Deleted Tables 6.8 and 6.9 because the examples are not implemented and updated Table 6.7 with examples that are implemented. In SGGIT/CP, SGGIT/ICP, SGGIT/NCP, and SGGIT/ISFC sections, removed the test steps referencing the TC Configuration column. TSE 22838 (rating 2): Added an introductory sentence to the Server test procedures (SGGIT) and the Client test procedures (CGGIT) regarding an additional initial condition for bonding.

Publication Number	Revision Number	Date	Comments
			TSE 22911 (rating 2): Added GATT 3/25a to the TCMT for GATT/CL/GPM/BV-07-C – -12-C and GATT/CL/GAS/BV-03-C.
24	p24	2023-06-29	Approved by BTI on 2023-06-05. Prepared for TCRL 2023-1 publication.
	p25r00–r13	2023-08-08 – 2024-05-15	TSE 18900 (rating 2): Per E17466, added test steps and updated the MSC, Pass verdict, and the TCMT entry for GATT/SR/GAS/BV-05-C. TSE 23000 (rating 2): Updated the TCMT entries for GATT/CL/GAR/BV-10-C and GATT/SR/GAR/BV-11-C. TSE 23193 (rating 1): Updated the GGIT annex to accommodate multiple instances of a service. TSE 24092 (rating 1): Replaced the SUM ICS references in the TCMT with CORE ICS references. Affects GATT/SR/GPM/BV-01-C, -13-C; GATT/CL/GPM/BV-07-C to -12-C. TSE 24131 (rating 3): Updated the Initial Condition for GATT/CL/GAD/BV-07-C and -08-C; updated the Test Purpose, Initial Condition, test steps, MSC, and the Pass verdict for GATT/SR/GAD/BV-07-C; and updated the Test Purpose, Initial Condition, test procedure, MSC, and Pass verdict for GATT/SR/GAD/BV-08-C to support checking that an SDP record is present for <<GATT Service>>. TSE 24271 (rating 1): Per E24247, converted the following commands from plural to singular: from “Discover Primary Services By Service UUID” to “Discover Primary Service By Service UUID”, from “Read Long Characteristic Values” to “Read Long Characteristic Value”, from “Write Long Characteristic Values” to “Write Long Characteristic Value”, from “Read Characteristic Descriptors” to “Read Characteristic Descriptor”, and from “Write Characteristic Descriptors” to “Write Characteristic Descriptor”. TSE 24825 (rating 1): Simplified the TCMT logic for GATT/CL/GAR/BV-10-C and -11-C, GATT/SR/GAR/BV-11-C and -12-C, GATT/SR/GAW/BV-12-C – -14-C, and GATT/SR/GPM/BV-06-C. Updated the document to align with latest standards.
25	p25	2024-07-01	Approved by BTI on 2024-05-22. Prepared for TCRL 2024-1 publication.
	p26r00–01	2024-07-16 – 2024-07-19	TSE 25414 (rating 1): Updated “GATT service” terminology/capitalization in GATT/CL/GAD/BV-07-C and -08-C.
26	p26	2024-09-04	Approved by BTI on 2024-08-14. Prepared for TCRL 2024-2 publication.

Publication Number	Revision Number	Date	Comments
	p27r00–r06	2024-10-24 – 2024-11-11	TSE 25851 (rating 2): Corrected the MSC/test procedure and the Pass verdict for GATT/CL/GAS/BV-01-C. TSE 25976 (rating 1): Per E19169, added explanatory text in the Introduction section to explain errata-based naming convention changes. TSE 26380 (rating 2): Corrected test step/MSC and Pass verdict for GATT/SR/GAD/BV-07-C and -08-C. TSE 26455 (rating 4): Updated GATT/SR/GAN/BV-01-C and GATT/SR/GAI/BV-01-C to table-based tests, adding new tests GATT/SR/GAN/BV-03-C and GATT/SR/GAI/BV-02-C, to verify bonding/CCCD persistence. Updated the TCMT accordingly.
27	p27	2025-02-18	Approved by BTI on 2024-12-26. Prepared for TCRL 2025-1 publication.
	p28r00–r03	2025-01-29 – 2025-03-24	TSE 24898 (rating 4): To accommodate ES-17355, deleted TCs GATT/CL/GAW/BI-33-C and -34-C; revised test description, initial condition, test purpose, test procedure, and Pass verdict for GATT/SR/GAW/BI-32-C and -33-C; and added a new section with new TCs GATT/SR/GAW/BI-39-C and -40-C. Updated the TCMT accordingly.
28	p28	2025-05-06	Approved by BTI on 2025-04-16. Prepared for TCRL 2025-2 publication.
	p28ed2r00	2025-06-02	TSE 27638 (rating 1): Added a step to some SGGIT tests to specify acquiring security permissions.
	p28 edition 2	2025-06-25	Approved by BTI on 2025-06-22. Prepared for edition 2 publication.
	p29r00–r03	2025-06-25 – 2025-07-30	TSE 25396 (rating 2): Removed “inconclusive” material from the Pass/Fail verdict conventions; removed the inconclusive verdict from GATT/SR/GAS/BV-02-C, -05-C, and -06-C; added a Fail verdict to GATT/SR/GAS/BV-08-C. TSE 25413 (rating 2): Cleaned up IXIT references throughout the document to better align with how PTS consumes them. TSE 26905 (rating 4): To accommodate changes needed for E20421, added a reference to ATT v6.1, added new TC GATT/SR/GAW/BI-41-C, and updated the TCMT entries for GATT/SR/GAS/BV-02-C, -05-C, -06-C, and -08-C. TSE 27159 (rating 2): To accommodate changes needed for E191072, updated preambles for EATT to include “encrypted”. TSE 27466 (rating 2): Removed the reference to the GATT Client Discovery Qualification Test Databases. Revised the Server testing configuration text and GATT/CL/GAD/BV-06-C and GATT/SR/GPA/BV-12-C to remove that reference.

Publication Number	Revision Number	Date	Comments
			TSE 27643 (rating 3): Updated the test steps and MSCs for the section containing GATT/SR/GAN/BV-01-C and -03-C and the section containing GATT/SR/GAI/BV-01-C and -02-C.
29	p29	2025-11-04	Approved by BTI on 2025-10-05. Prepared for TCRL pkg101 publication.
	p30r00–r07	2025-11-21 – 2026-02-19	TSE 27410 (rating 2): Added an initial condition to the section containing GATT/SR/GAN/BV-01-C and -03-C and to the section containing GATT/SR/GAI/BV-01-C and -02-C. TSE 28304 (rating 3): Reverted the changes originally made in TSE 27643, affecting GATT/SR/GAN/BV-01-C and -03-C, to correct an issue with bonding in the revised test. TSE 28341 (rating 4): To support E18901, converted GATT/SR/UNS/BI-02-C to table-driven format, added new TC GATT/SR/UNS/BI-03-C, and updated the TCMT accordingly. Updated the Annex: Generic GATT Integrated Tests (GGIT) section to account for Core v6.3. TSE 28433 (rating 2): Added a new preamble section to enable robust caching. Added related initial condition to GATT/SR/GAW/BI-41-C.
30	p30	2026-05-05	Approved by BTI on 2026-04-07. Prepared for TCRL pkg103 publication.
	p31r00–r08	2026-06-16 – 2026-10-05	TSE 28146 (rating 3): Corrected the Initial Condition and Test Procedure/MSC for GATT/SR/GAW/BI-09-C. TSE 29250 (rating 2): Long-term updates to the entire Test Suite, as initially captured in BTI review JR-7096. TSE 29494 (rating 4): To accommodate changes needed for the LE High Data Throughput (HDT) feature of the Core v7.0 release, added a reference to the Core 7.0 spec and added new sections with new TCs GATT/SR/GAD/BI-01-C, GATT/SR/GAR/BI-46-C – -50-C, and GATT/SR/GAW/BI-42-C – -43-C. Updated the TCMT accordingly. Editorial updates to references to align with BTI's desired test doc conventions.
31	p31	2026-11-03	Approved by BTI on 2026-10-12. Prepared for TCRL pkg105 publication.

Acknowledgments

Name	Company
Elizabeth Dominguez	AT4 wireless
Juanma Hidalgo	AT4 wireless
Elisa Rincón	AT4 wireless
Angel Romero	AT4 wireless
Bogdan Alexandru	Bluetooth SIG, Inc.
Alexandru Andreescu	Bluetooth SIG, Inc.

Name	Company
Dejan Berec	Bluetooth SIG, Inc.
Gene Chang	Bluetooth SIG, Inc.
Virgil Dragomir	Bluetooth SIG, Inc.
Tim Eichelberger	Bluetooth SIG, Inc.
Manivannan Elangovan	Bluetooth SIG, Inc.
Yung Ming Kung	Bluetooth SIG, Inc.
Charlie Lenahan	Bluetooth SIG, Inc.
Jawid Mirani	Bluetooth SIG, Inc.
Aravind Narasimhan	Bluetooth SIG, Inc.
Meagan Schuver	Bluetooth SIG, Inc.
Florin Toma	Bluetooth SIG, Inc.
Alicia Courtney	Broadcom
Norbert Grunert	Broadcom
Rasmus Abildgren	CSR
Joe Decuir	CSR
Robin Heydon	CSR
Magnus Sommansson	CSR
Tim Howes	Nokia
Miika Laaksonen	Nokia
Frank Karlsen	Nordic Semiconductor
Sebastien Mackaie-Blanchi	Nordic Semiconductor
Miles Smith	Nordic Semiconductor
Terry Bourk	Qualcomm
Brian A. Redding	Qualcomm
Morteza Rahchamani	TI
Jason Hillyard	Wicentric