

HVAC Integration NLC Profile

Bluetooth® Profile Specification

- **Version:** d0.9r05_PR
- **Version Date:** 2025-02-07
- **Prepared By:** Mesh Working Group

This document is a working draft of a potential Bluetooth specification. It is subject to change and Bluetooth SIG is not required to finalize or adopt it. Although the Bluetooth SIG Board of Directors has decided to publicly release this working draft, other draft specifications, including prior or subsequent versions of this document, are Bluetooth SIG Confidential Information, unless they have been approved for public release by the Bluetooth SIG Board of Directors. Bluetooth SIG Members must comply with the Bluetooth SIG Confidentiality Policy and not disclose any document that is Bluetooth SIG confidential to anyone that is not a member of the Bluetooth SIG.

Abstract:

The HVAC Integration NLC Profile specifies the requirements for a product acting as a wall thermostat subscribing to occupancy sensors in a Bluetooth® mesh system.



Use of this specification is your acknowledgement that you agree to and will comply with the following notices and disclaimers. You are advised to seek appropriate legal, engineering, and other professional advice regarding the use, interpretation, and effect of this specification.

Use of Bluetooth specifications by members of Bluetooth SIG is governed by the membership and other related agreements between Bluetooth SIG and its members, including those agreements posted on Bluetooth SIG's website located at www.bluetooth.com. Any use of this specification by a member that is not in compliance with the applicable membership and other related agreements is prohibited and, among other things, may result in (i) termination of the applicable agreements and (ii) liability for infringement of the intellectual property rights of Bluetooth SIG and its members. This specification may provide options, because, for example, some products do not implement every portion of the specification. All content within the specification, including notes, appendices, figures, tables, message sequence charts, examples, sample data, and each option identified is intended to be within the bounds of the Scope as defined in the Bluetooth Patent/Copyright License Agreement ("PCLA"). Also, the identification of options for implementing a portion of the specification is intended to provide design flexibility without establishing, for purposes of the PCLA, that any of these options is a "technically reasonable non-infringing alternative."

Use of this specification by anyone who is not a member of Bluetooth SIG is prohibited and is an infringement of the intellectual property rights of Bluetooth SIG and its members. The furnishing of this specification does not grant any license to any intellectual property of Bluetooth SIG or its members. THIS SPECIFICATION IS PROVIDED "AS IS" AND BLUETOOTH SIG, ITS MEMBERS AND THEIR AFFILIATES MAKE NO REPRESENTATIONS OR WARRANTIES AND DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTIES OF MERCHANTABILITY, TITLE, NONINFRINGEMENT, FITNESS FOR ANY PARTICULAR PURPOSE, OR THAT THE CONTENT OF THIS SPECIFICATION IS FREE OF ERRORS. For the avoidance of doubt, Bluetooth SIG has not made any search or investigation as to third parties that may claim rights in or to any specifications or any intellectual property that may be required to implement any specifications and it disclaims any obligation or duty to do so.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, BLUETOOTH SIG, ITS MEMBERS AND THEIR AFFILIATES DISCLAIM ALL LIABILITY ARISING OUT OF OR RELATING TO USE OF THIS SPECIFICATION AND ANY INFORMATION CONTAINED IN THIS SPECIFICATION, INCLUDING LOST REVENUE, PROFITS, DATA OR PROGRAMS, OR BUSINESS INTERRUPTION, OR FOR SPECIAL, INDIRECT, CONSEQUENTIAL, INCIDENTAL OR PUNITIVE DAMAGES, HOWEVER CAUSED AND REGARDLESS OF THE THEORY OF LIABILITY, AND EVEN IF BLUETOOTH SIG, ITS MEMBERS OR THEIR AFFILIATES HAVE BEEN ADVISED OF THE POSSIBILITY OF THE DAMAGES.

Products equipped with Bluetooth wireless technology ("Bluetooth Products") and their combination, operation, use, implementation, and distribution may be subject to regulatory controls under the laws and regulations of numerous countries that regulate products that use wireless non-licensed spectrum. Examples include airline regulations, telecommunications regulations, technology transfer controls, and health and safety regulations. You are solely responsible for complying with all applicable laws and regulations and for obtaining any and all required authorizations, permits, or licenses in connection with your use of this specification and development, manufacture, and distribution of Bluetooth Products. Nothing in this specification provides any information or assistance in connection with complying with applicable laws or regulations or obtaining required authorizations, permits, or licenses.

Bluetooth SIG is not required to adopt any specification or portion thereof. If this specification is not the final version adopted by Bluetooth SIG's Board of Directors, it may not be adopted. Any specification adopted by Bluetooth SIG's Board of Directors may be withdrawn, replaced, or modified at any time. Bluetooth SIG reserves the right to change or alter final specifications in accordance with its membership and operating agreements.

Copyright © 2024–2025. All copyrights in the Bluetooth Specifications themselves are owned by Apple Inc., Ericsson AB, Intel Corporation, Google LLC, Lenovo (Singapore) Pte. Ltd., Microsoft Corporation, Nokia Corporation, and Toshiba Corporation. The Bluetooth word mark and logos are owned by Bluetooth SIG, Inc. Other third-party brands and names are the property of their respective owners.



Contents

1	Introduction.....	4
1.1	Language.....	4
1.1.1	Language conventions.....	4
1.1.1.1	Implementation alternatives.....	5
1.1.1.2	Discrepancies.....	5
1.1.2	Reserved for Future Use.....	5
1.1.3	Prohibited.....	6
1.2	Requirements in Tables.....	6
1.2.1	Table requirements for unused cells.....	6
1.3	Conformance.....	6
2	Configuration.....	7
2.1	Identification.....	7
2.2	Mesh profile relationships.....	7
2.3	Concurrency limitations and restrictions.....	7
2.4	Topology limitations and restrictions.....	7
2.5	Bluetooth specification release compatibility.....	7
2.6	Mesh Protocol dependencies.....	7
3	Requirements and recommendations.....	8
3.1	Provisioning.....	8
3.2	Bearers.....	8
3.3	Features.....	8
3.4	Performance.....	8
3.5	Models.....	9
3.6	Combinations of mesh profiles.....	9
3.7	Recommendations.....	9
4	Acronyms and abbreviations.....	10
5	References.....	11



1 Introduction

Bluetooth® Networked Lighting Control (NLC) systems implement dense grids of occupancy sensors, very often using a sensor in every luminaire, known as luminaire-level lighting control (LLLC). Performance of heating, ventilation, and air conditioning (HVAC) systems controlled by wall thermostats can be improved when the thermostats are aware of occupancy status reported by the occupancy sensors used by lighting systems to save energy when rooms are unoccupied.

The HVAC Integration Mesh Profile is the top-layer specification in the mesh networking stack (see Section 2.1 in Mesh Protocol [2]). The profile specifies the requirements for a product acting as a thermostat with an integrated Sensor Client model (see Section 4.4.1 in Mesh Model [3]) that can subscribe to occupancy sensors in a Bluetooth mesh system. The HVAC Integration Mesh Profile sets up a methodology for building a thermostat with an integrated occupancy observer feature.

A common use case for the HVAC Integration Mesh Profile is a device with a Sensor Client model subscribing to sensors reporting occupancy in a given space.

The HVAC Integration Mesh Profile supports three methods of occupancy detection and reporting:

- Sensing motion: This is the most common method, usually based on passive infrared (PIR) sensing to detect motion. When motion is detected, the space monitored by the sensor is considered occupied for a certain time. The amount of time is specified by an application using the Sensor Client model and not by the Sensor Client model.
- Sensing presence: This method requires that the sensor can detect both presence (occupancy) and absence (vacancy).
- People-counting: This method requires that the sensor can count and report the number of occupants in the space monitored by the sensor.

Terms, acronyms, and abbreviations that have a specific meaning in the context of this Bluetooth Document or the Bluetooth environment in general are either defined or cross-referenced on their first use in this Bluetooth Document. Bluetooth-specific terms that are not defined in this specification are defined in other Bluetooth specifications, such as the Bluetooth Core Specification.

1.1 Language

1.1.1 Language conventions

In the development of a specification, the Bluetooth SIG has established the following conventions for use of the terms “*shall*”, “*mandatory*”, “*shall not*”, “*should*”, “*should not*”, “*may*”, “*optional*”, “*must*”, and “*can*”. In this Bluetooth specification, the terms in Table 1.1 have the specific meanings given in that table, irrespective of other meanings that exist.

Term	Definition
shall or mandatory	—used to express what is required by the specification and is to be implemented exactly as written without deviation
shall not	—used to express what is forbidden by the specification



Term	Definition
should or may or optional	— not mandatory. Used to express either: 1. what is recommended by the specification without forbidding anything (“should”) 2. what is permissible within the limits of the specification (“may” or “optional”)
should not	—used to indicate that something is discouraged but not forbidden by the specification
must	—used to indicate either: 1. an indisputable statement of fact that is always true regardless of the circumstances 2. an implication or natural consequence if a separately-stated requirement is followed
can	—used to express a statement of possibility or capability

Table 1.1: Language conventions terms and definitions

Where more than one item is permitted but not required, the choices to include or support those items are independent from one another unless the specification explicitly states otherwise. Each item that is implemented shall be implemented exactly as written without deviation.

1.1.1.1 Implementation alternatives

When specification content indicates that there are multiple alternatives to satisfy specification requirements, if one alternative is explained or illustrated in an example it is not intended to limit other alternatives that the specification requirements permit.

1.1.1.2 Discrepancies

It is the goal of Bluetooth SIG that specifications are clear, unambiguous, and do not contain discrepancies. However, members can report any perceived discrepancy by filing an erratum and can request a test case waiver as appropriate.

1.1.2 Reserved for Future Use

Where a field in a packet, Protocol Data Unit (PDU), or other data structure is described as "Reserved for Future Use" (irrespective of whether in uppercase or lowercase), the device creating the structure shall set its value to zero unless otherwise specified. Any device receiving or interpreting the structure shall ignore that field; in particular, it shall not reject the structure because of the value of the field.

Where a field, parameter, or other variable object can take a range of values, and some values are described as "Reserved for Future Use," a device sending the object shall not set the object to those values. A device receiving an object with such a value should reject it, and any data structure containing it, as being erroneous; however, this does not apply in a context where the object is described as being ignored or it is specified to ignore unrecognized values.

When a field value is a bit field, unassigned bits can be marked as Reserved for Future Use and shall be set to 0. Implementations that receive a message that contains a Reserved for Future Use bit that is set to 1 shall process the message as if that bit was set to 0, except where specified otherwise.

The acronym RFU is equivalent to Reserved for Future Use.



1.1.3 Prohibited

When a field value is an enumeration, unassigned values can be marked as “Prohibited.” These values shall never be used by an implementation, and any message received that includes a Prohibited value shall be ignored and shall not be processed and shall not be responded to.

Where a field, parameter, or other variable object can take a range of values, and some values are described as “Prohibited,” devices shall not set the object to any of those Prohibited values. A device receiving an object with such a value should reject it, and any data structure containing it, as being erroneous.

“Prohibited” is never abbreviated.

1.2 Requirements in Tables

Requirements in this specification are defined as "Mandatory" (M), "Optional" (O), "Excluded" (E), "Not Applicable" (N/A), or "Conditional" (C.#). Conditional statements (C.#) are listed directly below the table in which they appear.

- "M" for mandatory. See [Table 1.1: Language conventions terms and definitions](#).
- "O" for optional. See [Table 1.1: Language conventions terms and definitions](#).
- "E" for excluded. “Excluded” means not permitted in this context; cannot be supported or included for this purpose. The item can still be supported or included if allowed for some other purpose (e.g., a feature can be mandatory for one role and excluded for another; a device that supports both roles must support this feature).
- "C.#" for conditional. “Conditional” means that an item is required, optional, or prohibited based on whether one or more other items are supported or included (# represents any number). Within the definition of the condition, if those other items mean that “not permitted” applies, it has the same meaning as “E”.

1.2.1 Table requirements for unused cells

An unused cell is a table cell without a value or content, which is indicated with either the word “none” (without quotation marks) or a hyphen (i.e., a “minus” sign).

To use an additional form of notation in this specification’s tables—such as an ellipsis (...) to indicate a gap in a series of values—add an explanation of that notation in the specification’s section on table conventions for requirements and unused cells. If a particular table uses a notation that differs from the initially expressed table conventions for unused cells, explain this additional notation in the introduction of the table to which it applies.

1.3 Conformance

Each capability of this specification shall be supported in the specified manner. This specification may provide options for design flexibility, because, for example, some products do not implement every portion of the specification. For each implementation option that is supported, it shall be supported as specified.



2 Configuration

2.1 Identification

The HVAC Integration Mesh Profile shall be identified by the «HVAC Integration» mesh profile UUID (see [5]) in the Composition Data Page 2 (see Mesh Protocol [2]).

2.2 Mesh profile relationships

A device implementing the HVAC Integration Mesh Profile interacts with a device implementing the Occupancy Sensor NLC Profile [6] as outlined in Mesh Model [3] Section 4.4.1.2.12, “Receiving a Sensor Status message”, and shown in Figure 2.1.

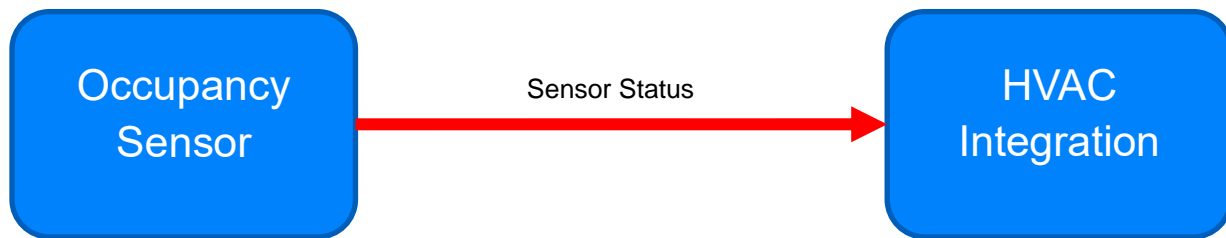


Figure 2.1: Interaction of an HVAC Integration with an Occupancy Sensor

2.3 Concurrency limitations and restrictions

There are no concurrency limitations or restrictions imposed by this specification.

2.4 Topology limitations and restrictions

There are no topology limitations or restrictions imposed by this specification.

2.5 Bluetooth specification release compatibility

This specification is compatible with Mesh Protocol, Version 1.1 [2], and Mesh Model, Version 1.1 [3].

2.6 Mesh Protocol dependencies

This specification requires implementation of all mandatory requirements for an unprovisioned device, and a node described in the Mesh Protocol [2].

3 Requirements and recommendations

The HVAC Integration Mesh Profile specifies the following requirements and recommendations.

3.1 Provisioning

The following requirements are related to provisioning:

- The PB-GATT provisioning bearer shall be supported. See Section 5.2.2 in Mesh Protocol [2].
- Either the device «Complete Local Name» advertising data (AD) type or the device «Shortened Local Name» AD type shall be included in scan response data when advertising the Mesh Provisioning Service. See Section 7.1.2.2.1 in [2].
- Visual attention indication for all instances of the Attention Timer shall be supported. The visual attention indication may be shared among multiple instances of the Attention Timer. See Section 4.2.10 in [2].

3.2 Bearers

The following requirements are related to bearers:

- The advertising bearer shall be supported. See Section 3.3.1 in [2].
- The Generic Attribute Profile (GATT) bearer shall be supported in the GATT Bearer Server role. See Section 3.3.2 in [2].

3.3 Features

The following requirements are related to features:

- The Relay feature shall be supported. See Section 3.4.6.1 in [2].
- The Proxy feature shall be supported. See Section 3.4.6.2 in [2].

3.4 Performance

The following requirements are related to performance:

- At least two network keys shall be supported. See Section 3.9.6.3 in [2].
- At least three application keys shall be supported. See Section 3.9.6.2 in [2].
- At least three application keys shall be supported by the Model to AppKey List state for each model instance that uses application keys. See Section 4.2.7 in [2].
- At least 255 entries in the replay protection list shall be supported. See Section 4.2.2.1 in [2].
- The Sensor Client model shall support a subscription list size of at least 32 items. See Section 4.2.3 in [2].
- At least 8 entries per connection in the proxy filter list shall be supported. See Section 6.4 in [2].
- At least 64 entries in the network message cache shall be supported. See Section 3.4.6.5 in [2].



3.5 Models

The following requirements are related to models:

- The Sensor Client model shall be supported. See Section 4.4.1 in Mesh Model [3].
- The Sensor Client model shall support receiving the Sensor Status message with any of the following:
 - A Sensor Property ID field value referencing the Motion Sensed device property (see [4]).
 - A Sensor Property ID field value referencing the Time Since Motion Sensed device property (see [4]).
 - A Sensor Property ID field value referencing the People Count device property (see [4]).
 - A Sensor Property ID field value referencing the Presence Detected device property (see [4]).

3.6 Combinations of mesh profiles

The following requirements are related to combinations of the HVAC Integration Mesh Profile and combinations with other mesh profiles (see [5]):

- When multiple instances of the HVAC Integration Mesh Profile are combined on a device, the number of entries in the replay protection list on the device shall be at least the number of entries in the replay protection list required by the HVAC Integration Mesh Profile. See Section 4.2.2.1 in Mesh Protocol [2].
- When the HVAC Integration Mesh Profile is combined with other mesh profiles on a device, the number of entries in the replay protection list on the device shall be at least the highest required minimum number of entries among the mesh profiles. See Section 4.2.2.1 in [2].
- When multiple instances of the HVAC Integration Mesh Profile are combined on a device, the device shall support at least the minimum number of network keys identified for the HVAC Integration Mesh Profile. See Section 3.9.6.3 in [2].
- When the HVAC Integration Mesh Profile is combined with other mesh profiles on a device, the device shall support at least the highest minimum number of network keys identified among the mesh profiles. See Section 3.9.6.3 in [2].
- When multiple instances of the HVAC Integration Mesh Profile are combined on a device, the device shall support at least the minimum number of application keys identified for the HVAC Integration Mesh Profile. See Section 3.9.6.2 in [2].
- When the HVAC Integration Mesh Profile is combined with other mesh profiles on a device, the device shall support at least the highest minimum number of application keys identified among the mesh profiles. See Section 3.9.6.2 in [2].

3.7 Recommendations

Implementers should consider the following recommendations:

- If a reset to factory default settings is supported, then a manual reset (i.e., physical interaction with the device) should be supported.



4 Acronyms and abbreviations

Acronym/Abbreviation	Meaning
AD	advertising data
GATT	Generic Attribute Profile
HVAC	Heating Ventilation and Air Conditioning
LLLC	luminaire-level lighting control
PDU	Protocol Data Unit
PIR	passive infrared
RFU	Reserved for Future Use

Table 4.1: Acronyms and abbreviations

5 References

- [1] Open Interoperable Mesh Products FRD
- [2] Mesh Protocol, Version 1.1 or later
- [3] Mesh Model, Version 1.1 or later
- [4] Device Properties, <https://www.bluetooth.com/specifications/specs/device-properties/>
- [5] Bluetooth SIG Assigned Numbers, <https://www.bluetooth.com/specifications/assigned-numbers>
- [6] Occupancy Sensor NLC Profile, Version 1.0 or later