

# Immediate Alert Service (IAS)

## **Bluetooth® Test Suite**

---

- **Revision:** IAS.TS.p3
- **Revision Date:** 2023-06-29
- **Prepared By:** BTI
- **Published during TCRL:** TCRL.2023-1



This document, regardless of its title or content, is not a Bluetooth Specification as defined in the Bluetooth Patent/Copyright License Agreement (“PCLA”) and Bluetooth Trademark License Agreement. Use of this document by members of Bluetooth SIG is governed by the membership and other related agreements between Bluetooth SIG Inc. (“Bluetooth SIG”) and its members, including the PCLA and other agreements posted on Bluetooth SIG’s website located at [www.bluetooth.com](http://www.bluetooth.com).

THIS DOCUMENT IS PROVIDED “AS IS” AND BLUETOOTH SIG, ITS MEMBERS, AND THEIR AFFILIATES MAKE NO REPRESENTATIONS OR WARRANTIES AND DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY, TITLE, NON-INFRINGEMENT, FITNESS FOR ANY PARTICULAR PURPOSE, THAT THE CONTENT OF THIS DOCUMENT IS FREE OF ERRORS.

TO THE EXTENT NOT PROHIBITED BY LAW, BLUETOOTH SIG, ITS MEMBERS, AND THEIR AFFILIATES DISCLAIM ALL LIABILITY ARISING OUT OF OR RELATING TO USE OF THIS DOCUMENT AND ANY INFORMATION CONTAINED IN THIS DOCUMENT, INCLUDING LOST REVENUE, PROFITS, DATA OR PROGRAMS, OR BUSINESS INTERRUPTION, OR FOR SPECIAL, INDIRECT, CONSEQUENTIAL, INCIDENTAL OR PUNITIVE DAMAGES, HOWEVER CAUSED AND REGARDLESS OF THE THEORY OF LIABILITY, AND EVEN IF BLUETOOTH SIG, ITS MEMBERS, OR THEIR AFFILIATES HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

This document is proprietary to Bluetooth SIG. This document may contain or cover subject matter that is intellectual property of Bluetooth SIG and its members. The furnishing of this document does not grant any license to any intellectual property of Bluetooth SIG or its members.

This document is subject to change without notice.

Copyright © 2012–2023 by Bluetooth SIG, Inc. The Bluetooth word mark and logos are owned by Bluetooth SIG, Inc. Other third-party brands and names are the property of their respective owners.



# Contents

<b>1</b>	<b>Scope .....</b>	<b>4</b>
<b>2</b>	<b>References, definitions, and abbreviations .....</b>	<b>5</b>
2.1	References .....	5
2.2	Definitions .....	5
2.3	Abbreviations .....	5
<b>3</b>	<b>Test Suite Structure (TSS) .....</b>	<b>6</b>
3.1	Overview .....	6
3.2	Test Strategy .....	6
3.3	Test groups .....	6
<b>4</b>	<b>Test cases (TC) .....</b>	<b>7</b>
4.1	Introduction .....	7
4.1.1	Test case identification conventions .....	7
4.1.2	Conformance .....	7
4.1.3	Pass/Fail verdict conventions .....	8
4.2	Setup preambles .....	8
4.2.1	ATT Bearer on LE Transport .....	8
4.3	Generic GATT Integrated Tests .....	9
	IAS/SR/SGGIT/SER/BV-01-C [Service GGIT – Immediate Alert] .....	9
	IAS/SR/SGGIT/CHA/BV-01-C [Characteristic GGIT – Alert Level] .....	9
4.4	Characteristic Write without Response .....	10
	IAS/SR/CW/BV-01-C [Characteristic Write without Response – Alert Level] .....	10
4.5	Service Procedures .....	10
	IAS/SR/SP/BV-01-C [Writing Alert Level Behavior] .....	10
<b>5</b>	<b>Test case mapping .....</b>	<b>12</b>
<b>6</b>	<b>Revision history and acknowledgments .....</b>	<b>13</b>

# 1 Scope

---

This Bluetooth document contains the Test Suite Structure (TSS) and test cases to test the implementation of the Bluetooth Immediate Alert Service Specification with the objective to provide a high probability of air interface interoperability between the tested implementation and other manufacturers' Bluetooth devices.

## 2 References, definitions, and abbreviations

---

### 2.1 References

This document incorporates provisions from other publications by dated or undated reference. These references are cited at the appropriate places in the text, and the publications are listed hereinafter. Additional definitions and abbreviations can be found in [1] and [2].

- [1] Test Strategy and Terminology Overview
- [2] Bluetooth Core Specification, Version 4.0 or later
- [3] Immediate Alert Service Specification, Version 1.0
- [4] ICS Proforma for Immediate Alert Service, IAS.ICS
- [5] GATT Test Suite, GATT.TS

### 2.2 Definitions

In this Bluetooth document, the definitions from [1] and [2] apply.

### 2.3 Abbreviations

In this Bluetooth document, the definitions, acronyms, and abbreviations from [1] and [2] apply.

## 3 Test Suite Structure (TSS)

### 3.1 Overview

The Immediate Alert Service requires GAP, SM, and GATT. This is illustrated in [Figure 3.1](#).

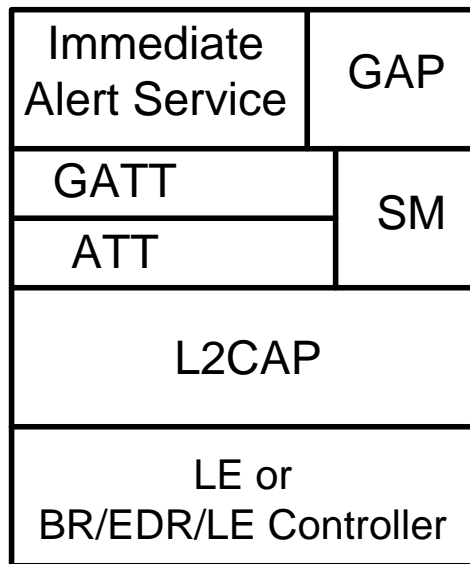


Figure 3.1: Immediate Alert Service test model

### 3.2 Test Strategy

The test objectives are to verify functionality of the Immediate Alert Service within a Bluetooth Host and enable interoperability between Bluetooth Hosts on different devices. The testing approach covers mandatory and optional requirements in the specification and matches these to the support of the IUT as described in the ICS. Any defined test herein is applicable to the IUT if the ICS logical expression defined in the Test Case Mapping Table (TCMT) evaluates to true.

The test equipment provides an implementation of the Radio Controller and the parts of the Host needed to perform the test cases defined in this Test Suite. A Lower Tester acts as the IUT's peer device and interacts with the IUT over-the-air interface. The configuration, including the IUT, needs to implement similar capabilities to communicate with the test equipment. For some test cases, it is necessary to stimulate the IUT from an Upper Tester. In practice, this could be implemented as a special test interface, a Man Machine Interface (MMI), or another interface supported by the IUT.

This Test Suite contains Valid Behavior (BV) tests complemented with Invalid Behavior (BI) tests where required. The test coverage mirrored in the Test Suite Structure is the result of a process that started with catalogued specification requirements that were logically grouped and assessed for testability enabling coverage in defined test purposes.

### 3.3 Test groups

The following test groups have been defined:

- Generic GATT Integrated Tests
- Characteristic Write
- Service Procedures

## 4 Test cases (TC)

### 4.1 Introduction

#### 4.1.1 Test case identification conventions

Test cases are assigned unique identifiers per the conventions in [1]. The convention used here is:

**<spec abbreviation>/<IUT role>/<class>/<feat>/<func>/<subfunc>/<cap>/<xx>-<nn>-<y>.**

Additionally, testing of this specification includes tests from the GATT Test Suite [5] referred to as Generic GATT Integrated Tests (GGIT); when used, the GGIT tests are referred to through a TCID string using the following convention:

**<spec abbreviation>/<IUT role>/<GGIT test group>/< GGIT class >/<xx>-<nn>-<y>.**

Identifier Abbreviation	Spec Identifier <spec abbreviation>
IAS	Immediate Alert Service
Identifier Abbreviation	Role Identifier <IUT role>
SR	Server Role
Identifier Abbreviation	Reference Identifier <GGIT test group>
SGGIT	Server Generic GATT Integrated Tests
Identifier Abbreviation	Reference Identifier <GGIT class>
CHA	Characteristic
SER	Service
Identifier Abbreviation	Feature Identifier <feat>
CW	Characteristic Write
SP	Service Procedures

Table 4.1: IAS TC feature naming conventions

#### 4.1.2 Conformance

When conformance is claimed for a particular specification, all capabilities are to be supported in the specified manner. The mandated tests from this Test Suite depend on the capabilities to which conformance is claimed.

The Bluetooth Qualification Program may employ tests to verify implementation robustness. The level of implementation robustness that is verified varies from one specification to another and may be revised for cause based on interoperability issues found in the market.

Such tests may verify:

- That claimed capabilities may be used in any order and any number of repetitions not excluded by the specification
- That capabilities enabled by the implementations are sustained over durations expected by the use case
- That the implementation gracefully handles any quantity of data expected by the use case
- That in cases where more than one valid interpretation of the specification exists, the implementation complies with at least one interpretation and gracefully handles other interpretations
- That the implementation is immune to attempted security exploits

A single execution of each of the required tests is required to constitute a Pass verdict. However, it is noted that to provide a foundation for interoperability, it is necessary that a qualified implementation consistently and repeatedly pass any of the applicable tests.

In any case, where a member finds an issue with the test plan generated by Launch Studio, with the test case as described in the Test Suite, or with the test system utilized, the member is required to notify the responsible party via an erratum request such that the issue may be addressed.

### **4.1.3 Pass/Fail verdict conventions**

Each test case has an Expected Outcome section. The IUT is granted the Pass verdict when all the detailed pass criteria conditions within the Expected Outcome section are met.

The convention in this Test Suite is that, unless there is a specific set of fail conditions outlined in the test case, the IUT fails the test case as soon as one of the pass criteria conditions cannot be met. If this occurs, then the outcome of the test is a Fail verdict.

## **4.2 Setup preambles**

The procedures defined in this section are provided for information, as they are used by test equipment in achieving the initial conditions in certain tests.

### **4.2.1 ATT Bearer on LE Transport**

Follow the preamble procedure described in [5] Section 4.2.1.2.



### 4.3 Generic GATT Integrated Tests

Execute the Generic GATT Integrated Tests defined in [5] Section 6.3, Server test procedures (SGGIT), using Table 4.2 below as input:

TCID	Service / Characteristic	Reference	Properties	Value Length (Octets)	Service Type
IAS/SR/SGGIT/SER/BV-01-C [Service GGIT – Immediate Alert]	Immediate Alert Service	[3] 2	-	-	Primary Service, Unique
IAS/SR/SGGIT/CHA/BV-01-C [Characteristic GGIT – Alert Level]	Alert Level Characteristic	[3] 3	0x04 (Write Without Response)	Skip	-

Table 4.2: Input for the GGIT Server test procedure

## 4.4 Characteristic Write without Response

Verify that the characteristics that support write can be written.

### IAS/SR/CW/BV-01-C [Characteristic Write without Response – Alert Level]

- Test Purpose
 

Write characteristic value.
- Reference
 

[3] 3.1.1
- Initial Condition
  - The handle of the Alert Level characteristic has been previously discovered by the Lower Tester during the test procedure in Section 4.3 or is known to the Lower Tester by other means.
  - If the IUT requires a bonding procedure then perform a bonding procedure.
  - Establish an ATT Bearer connection between the Lower Tester and IUT as described in Section 4.2.1.
  - If IUT permissions for the characteristic require a specific security mode or security level, establish a connection meeting those requirements.
- Test Procedure
  1. Select a value that is valid for the characteristic. Write the characteristic value by executing the GATT procedure Write Without Response.
  2. Verify that the characteristic value is successfully written.
- Expected Outcome
 

Pass verdict

The characteristic value is successfully written.

## 4.5 Service Procedures

Verify the operation of additional procedures defined in the service specification.

### IAS/SR/SP/BV-01-C [Writing Alert Level Behavior]

- Test Purpose
 

Verify that the IUT starts alerting when the Alert Level characteristic is written.
- Reference
 

[3] 4.1
- Initial Condition
  - If the IUT requires a bonding procedure then perform a bonding procedure.
  - Establish an ATT Bearer connection between the Lower Tester and IUT as described in Section 4.2.1.

- Test Procedure
  1. Run the procedure described in test case [IAS/SR/CW/BV-01-C \[Characteristic Write without Response – Alert Level\]](#) with the alert level set to "Mild Alert".
  2. Verify that the IUT starts alerting with a Mild Alert. (Note: The alerting action is implementation specific.)
  3. Run the procedure described in test case [IAS/SR/CW/BV-01-C \[Characteristic Write without Response – Alert Level\]](#) with the alert level set to "High Alert".
  4. Verify that the IUT starts alerting with a High Alert. (Note: The alerting action is implementation specific.)
  5. Run the procedure described in test case [IAS/SR/CW/BV-01-C \[Characteristic Write without Response – Alert Level\]](#) with the alert level set to "No Alert".
  6. Verify that the IUT stops alerting.

- Note

The alerting action is implementation specific.

- Expected Outcome

Pass verdict

The IUT starts alerting at the correct level when an alert level of "Mild Alert" or "High Alert" is written, and stops alerting when an alert level of "No Alert" is written.

## 5 Test case mapping

The Test Case Mapping Table (TCMT) maps test cases to specific requirements in the ICS. The IUT is tested in all roles for which support is declared in the ICS document.

The columns for the TCMT are defined as follows:

**Item:** Contains a logical expression based on specific entries from the associated ICS document. Contains a logical expression (using the operators AND, OR, NOT as needed) based on specific entries from the applicable ICS document(s). The entries are in the form of y/x references, where y corresponds to the table number and x corresponds to the feature number as defined in the ICS document for Immediate Alert Service (IAS) [4].

**Feature:** A brief, informal description of the feature being tested.

**Test Case(s):** The applicable test case identifiers are required for Bluetooth Qualification if the corresponding y/x references defined in the Item column are supported. Further details about the function of the TCMT are elaborated in [1].

For the purpose and structure of the ICS/IXIT, refer to [1].

Item	Feature	Test Case(s)
IAS 2/1	Immediate Alert Service	IAS/SR/SGGIT/SER/BV-01-C
IAS 2/2	Alert Level Characteristic	IAS/SR/SGGIT/CHA/BV-01-C
IAS 2/3	Alert Level Characteristic, Write	IAS/SR/CW/BV-01-C
IAS 2/4	Writing Alert Level Behavior	IAS/SR/SP/BV-01-C

Table 5.1: Test case mapping

## 6 Revision history and acknowledgments

### Revision History

Publication Number	Revision Number	Date	Comments
0	1.0.0	2011-06-27	Prepare for publication.
	1.0.1r00	2016-05-25	Converted to new Test Case ID conventions as defined in TSTO v4.1.
	1.0.1r01	2016-06-02	Converted to current TS template
	1.0.1r02	2016-06-03	Fixed some links and other editorial corrections
1	1.0.1	2016-07-14	Prepared for TCRL 2016-1 publication.
	1.0.2r00	2018-03-06	TSE 10459 (rating 4): Removed SDP-related items including test case IAS/SR/SDP/BV-01-C.
2	1.0.2	2018-06-27	Approved by BTI. Prepared for TCRL 2018-1 publication.
	p3r00–r01	2023-05-03 – 2023-05-17	TSE 22818 (rating 2): Converted the following test cases to GGIT: IAS/SR/DEC/BV-01-C and IAS/SR/SD/BV-01-C. The new GGIT converted TCIDs are: IAS/SR/SGGIT/SER/BV-01-C and IAS/SR/SGGIT/CHA/BV-01-C. Updated the TCMT accordingly. Editorials to align the document with the latest TS template and DNMD, including setting the previous v1.0.2 as p2 and removing the draft (pre-v1.0.0 entries) from the revision history.
3	p3	2023-06-29	Approved by BTI on 2023-05-28. Prepared for TCRL 2023-1 publication.

### Acknowledgments

Name	Company
Victor Zhodzishsky	Broadcom
Daisuke Matsuoh	Citizen
Steve Davies	Nokia
Jason Hillyard	Wicentric